


DATE REVISED	DATE REVISED	FED. RD. DIST. NO.	STATE	JOB NO.	SHEET NO.	TOTAL SHEETS
	07/15/2025	6	ARK.	040885	24	47
SUMMARY OF QUANTITIES AND REVISIONS						



SUMMARY OF QUANTITIES (1 OF 2)

ITEM NUMBER	ITEM	QUANTITY	UNIT
SP & 201	CLEARING	20	STATION
201	GRUBBING	20	STATION
202	REMOVAL AND DISPOSAL OF FENCE	291	LIN. FT.
202	REMOVAL AND DISPOSAL OF CONCRETE DRIVEWAYS	277	SQ. YD.
202	REMOVAL AND DISPOSAL OF WALKS	165	SQ. YD.
202	REMOVAL AND DISPOSAL OF SIGN FOUNDATIONS	1	EACH
202	REMOVAL AND DISPOSAL OF PIPE CULVERTS	10	EACH
202	REMOVAL AND DISPOSAL OF GUARDRAIL	275	LIN. FT.
202	REMOVAL AND DISPOSAL OF BUILDINGS	5	EACH
202	REMOVAL AND DISPOSAL OF STORM CELLAR	1	EACH
202	REMOVAL AND DISPOSAL OF SIGNS	1	EACH
SP, SS, & 210	UNCLASSIFIED EXCAVATION	112013	CU. YD.
210	PRESPLITTING	2098	SQ. YD.
SP & 210	COMPACTED EMBANKMENT	2303	CU. YD.
SP & 210	SOIL STABILIZATION	100	TON
SP, SS, & 303	AGGREGATE BASE COURSE (CLASS 7)	7437	TON
SS & 401	TACK COAT	1174	GAL.
SP, SS, & 406	MINERAL AGGREGATE IN ACHM BINDER COURSE (1")	2059	TON
SP, SS, & 406	ASPHALT BINDER (PG 64-22) IN ACHM BINDER COURSE (1")	95	TON
SP, SS, & 407	MINERAL AGGREGATE IN ACHM SURFACE COURSE (1/2")	2113	TON
SP, SS, & 407	ASPHALT BINDER (PG 64-22) IN ACHM SURFACE COURSE (1/2")	135	TON
SP & 412	COLD MILLING ASPHALT PAVEMENT	533	SQ. YD.
SP, SS, & 414	ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC	50	TON
SP, SS, & 415	ACHM PATCHING OF EXISTING ROADWAY	100	TON
SP, SS, & 505	PORTLAND CEMENT CONCRETE DRIVEWAY	283.8	SQ. YD.
601	MOBILIZATION	1.00	LUMP SUM
SS & 603	MAINTENANCE OF TRAFFIC	1.00	LUMP SUM
SS & 604	SIGNS	326	SQ. FT.
SS & 604	BARRICADES	64	LIN. FT.
SS & 604	TRAFFIC DRUMS	59	EACH
604	CONSTRUCTION PAVEMENT MARKINGS	18700	LIN. FT.
604	REMOVAL OF CONSTRUCTION PAVEMENT MARKINGS	12130	LIN. FT.
604	REMOVAL OF PERMANENT PAVEMENT MARKINGS	9900	LIN. FT.
SS & 604	VERTICAL PANELS	15	EACH
SP, SS, & 605	CONCRETE DITCH PAVING (TYPE B)	1511	SQ. YD.
SP, SS, & 605	CONCRETE DITCH PAVING (TYPE SPECIAL)	29	SQ. YD.
SS & 606	24" REINFORCED CONCRETE PIPE CULVERTS (CLASS III)	112	LIN. FT.
SS & 606	30" REINFORCED CONCRETE PIPE CULVERTS (CLASS IV)	72	LIN. FT.
SS & 606	36" X 23" REINFORCED CONCRETE ARCH PIPE CULVERTS (CLASS III)	160	LIN. FT.
SP, SS, & 606	18" SIDE DRAIN	166	LIN. FT.
SS & 606	22" X 14" SIDE DRAIN	20	LIN. FT.
SS & 606	24" FLARED END SECTIONS FOR REINFORCED CONCRETE PIPE CULVERTS	2	EACH
SS & 606	30" FLARED END SECTIONS FOR REINFORCED CONCRETE PIPE CULVERTS	2	EACH
SS & 606	36" X 23" FLARED END SECTIONS FOR REINFORCED CONCRETE ARCH PIPE CULVERTS	4	EACH
SS & 606	SELECTED PIPE BEDDING	50	CU. YD.
SS & 611	4" PIPE UNDERDRAINS	1000	LIN. FT.
SS & 611	UNDERDRAIN OUTLET PROTECTORS	4	EACH
* SS & 619	4' STEEL CHAIN LINK FENCE (ALTERNATE NO. 1)	193	LIN. FT.
* SS & 619	4' ALUMINUM CHAIN LINK FENCE (ALTERNATE NO. 2)	193	LIN. FT.
* SS & 619	16' STEEL GATES (ALTERNATE NO. 1)	1	EACH
* SS & 619	16' ALUMINUM GATES (ALTERNATE NO. 2)	1	EACH

* DENOTES ALTERNATE BID ITEMS.

SUMMARY OF QUANTITIES (2 OF 2)


ITEM NUMBER	ITEM	QUANTITY	UNIT
620	LIME	22	TON
620	SEEDING	11.04	ACRE
SS & 620	MULCH COVER	20.90	ACRE
620	WATER	1196.1	M. GAL.
621	TEMPORARY SEEDING	9.86	ACRE
621	SILT FENCE	1520	LIN. FT.
621	SAND BAG DITCH CHECKS	858	BAG
621	DIVERSION DITCH	986	LIN. FT.
621	SEDIMENT BASIN	578	CU. YD.
621	OBLITERATION OF SEDIMENT BASIN	578	CU. YD.
621	SEDIMENT REMOVAL AND DISPOSAL	710	CU. YD.
621	PIPE FOR SLOPE DRAINS	136	LIN. FT.
621	ROCK DITCH CHECKS	120	CU. YD.
623	SECOND SEEDING APPLICATION	11.04	ACRE
624	SOLID SODDING	1105	SQ. YD.
626	EROSION CONTROL MATTING (CLASS 3)	277	SQ. YD.
628	TOPSOIL FURNISHED AND PLACED	686	CU. YD.
635	ROADWAY CONSTRUCTION CONTROL	1.00	LUMP SUM
637	MAILBOXES	4	EACH
SS & 637	MAILBOX SUPPORTS (SINGLE)	4	EACH
642	RUMBLE STRIPS IN ASPHALT SHOULDERS	3410	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING WHITE (6")	4350	LIN. FT.
719	THERMOPLASTIC PAVEMENT MARKING YELLOW (6")	4350	LIN. FT.
721	RAISED PAVEMENT MARKERS (TYPE II)	28	EACH
SS & 816	FILTER BLANKET	60	SQ. YD.
SS & 816	DUMPED RIPRAP	30	CU. YD.

REVISIONS

DATE	REVISION	SHEET NUMBER
7/15/2025	REVISED THE PLAN SHEET TO INCLUDE A NOTE FOR THE RESTRAINING CONDITION. CORRECTED THE RESTRAINING CONDITIONS SPECIAL PROVISIONS TO INCLUDE THE CORRECT EXHIBITS AND VERBAGE.	24, 27, & 29

SUMMARY OF QUANTITIES AND REVISIONS

DATE REVISED	DATE REVISED	FED. RD. DIST. NO.	STATE	JOB NO.	SHEET NO.	TOTAL SHEETS
	07/15/2025	6	ARK.	040885	29	47
PLAN AND PROFILE SHEETS						



STA. 113+00 IN PLACE
30" X 76' R.C.
PIPE CULVERT LT. CROSS DRAIN
RETAIN

STA. 114+98 CONSTRUCT
DBL. 36" X 23" X 80' R.C. ARCH PIPE CULVERT
30' RT. FWD. SKEW
(CLASS V) (TYPE 3 BEDDING)
W/ FES LT. & RT.
Q50 = 47 CFS, D.A. = 19.3 AC.
CHANNEL CHANGE = 10 CU. YDS.

STA. 117+28 IN PLACE
12" X 32' CPP
PIPE CULVERT LT. SIDE DRAIN
RETAIN

STA. 117+09 IN PLACE
18" X 48' CMP
PIPE CULVERT LT. SIDE DRAIN
RETAIN
CONSTRUCT APPROACH = 40 CU. YDS.


STA. 117+40 IN PLACE
24" X 33' RCP
PIPE CULVERT LT. CROSS DRAIN
REMOVE

STA. 119+13 IN PLACE
18" X 58' CPP
PIPE CULVERT LT. SIDE DRAIN
REMOVE
CONSTRUCT APPROACH = 75 CU. YDS.

STA. 121+65 IN PLACE
18" X 20' CMP
PIPE CULVERT LT. SIDE DRAIN
REMOVE AND INSTALL
22" X 14" X 34' ARCH PIPE CULVERT
LT. SIDE DRAIN
CONSTRUCT APPROACH = 20 CU. YDS.

OBLITERATE PAVEMENT

RESTRAINING CONDITIONS
AREA BOUNDARY

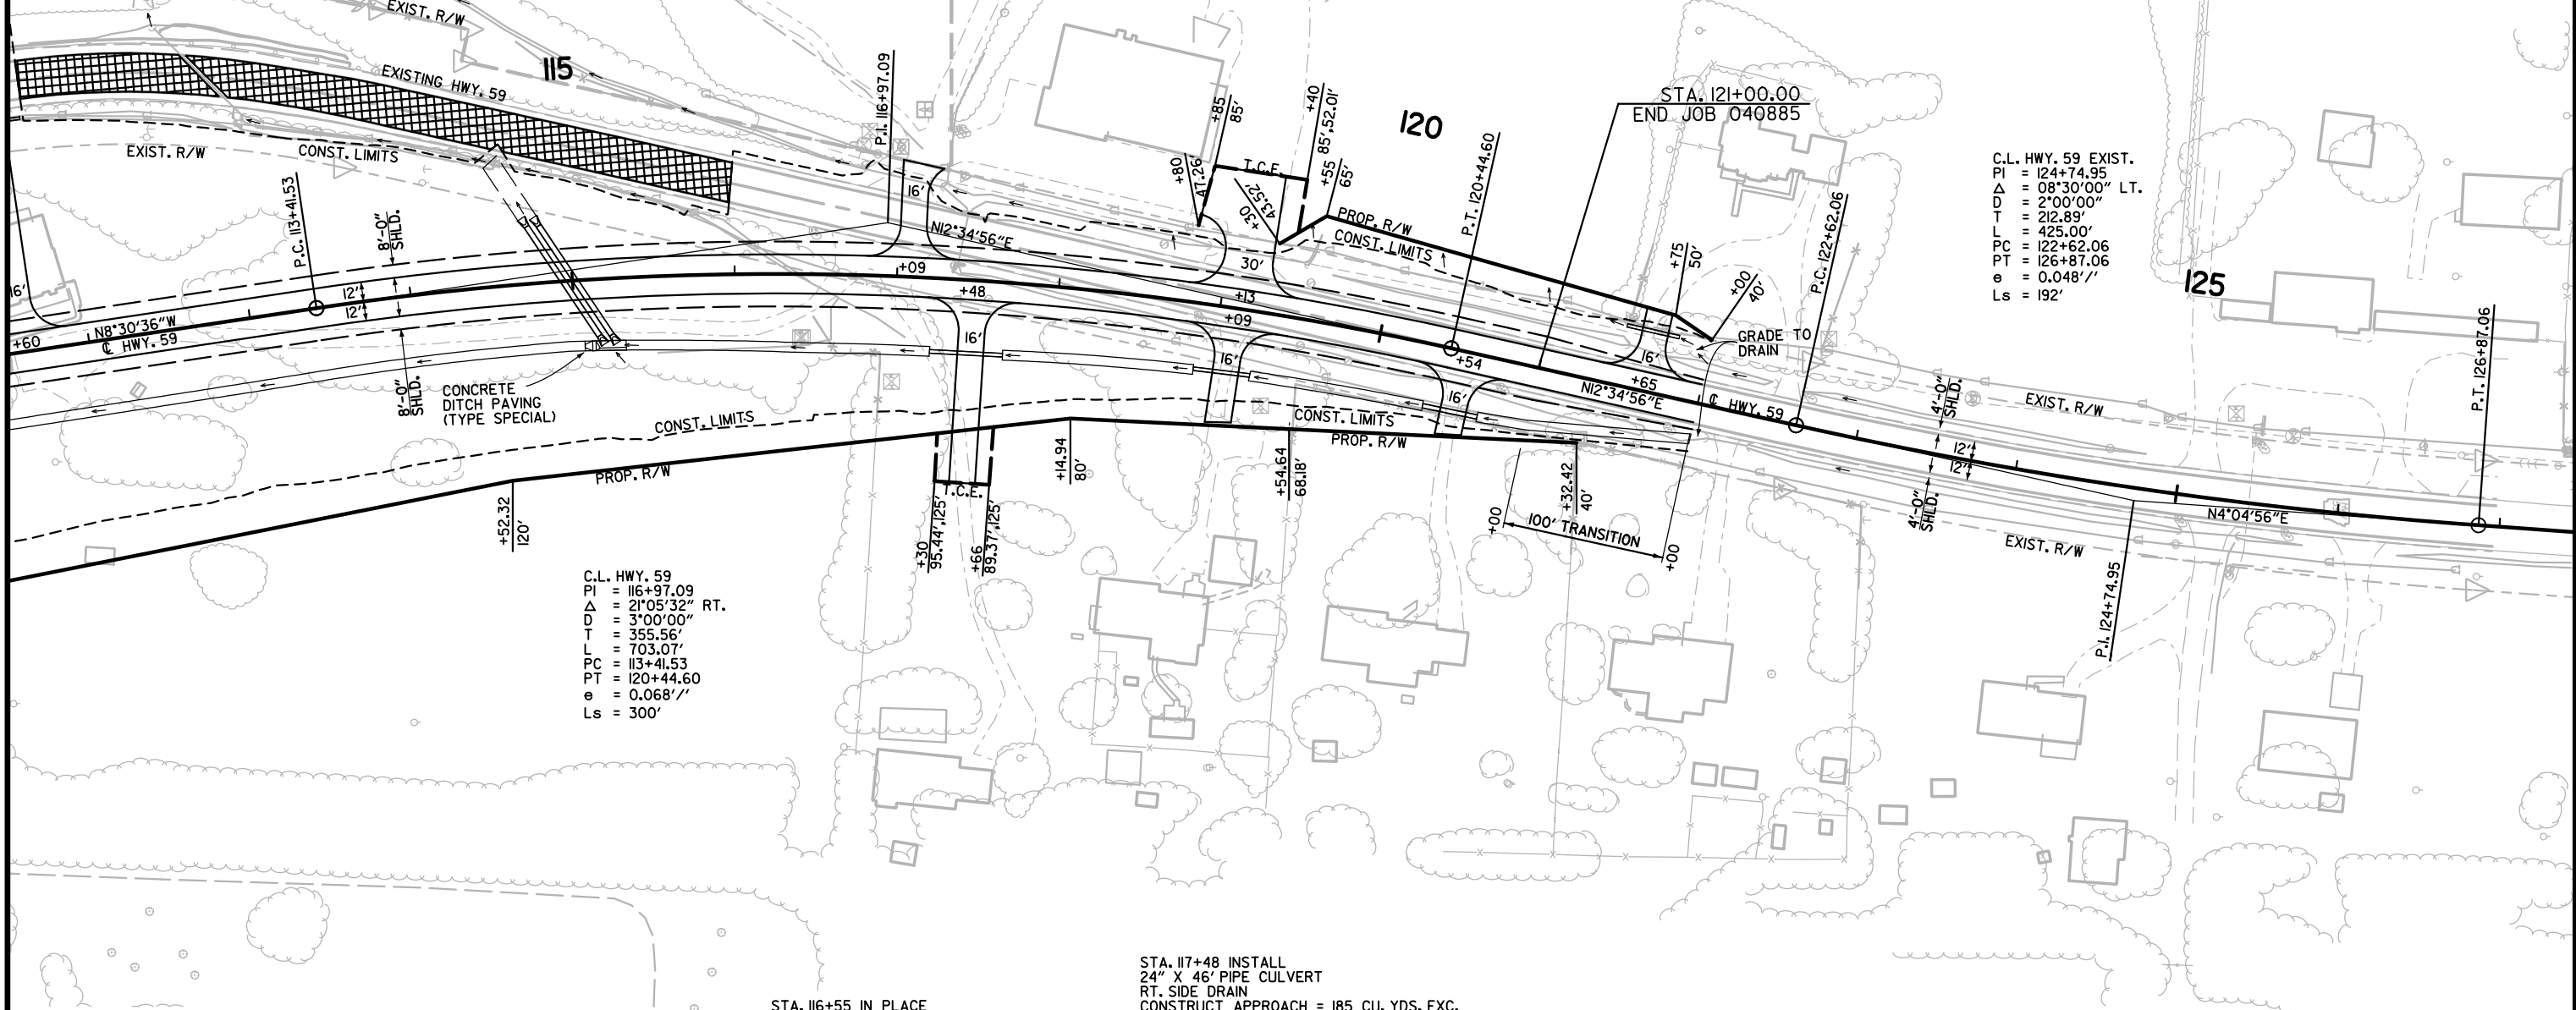

C.L. HWY. 59 EXIST.
PI = 124+74.95
Δ = 08°30'00" LT.
D = 2'00'00"
T = 212.89'
L = 425.00'
PC = 122+62.06
PT = 126+87.06
e = 0.048'/'
Ls = 192'

C.L. HWY. 59
PI = 116+97.09
Δ = 21°05'32" RT.
D = 3'00'00"
T = 355.56'
L = 703.07'
PC = 113+41.53
PT = 120+44.60
e = 0.068'/'
Ls = 300'

STA. 117+48 INSTALL
24" X 46' PIPE CULVERT
RT. SIDE DRAIN
CONSTRUCT APPROACH = 185 CU. YDS. EXC.
65 CU. YDS. EMB.

STA. 119+09 IN PLACE
18" X 24' RCP
PIPE CULVERT RT. SIDE DRAIN
REMOVE AND INSTALL
24" X 36' PIPE CULVERT
RT. SIDE DRAIN
CONSTRUCT APPROACH = 20 CU. YDS. EXC.
35 CU. YDS. EMB.

STA. 120+54 IN PLACE
18" X 26' RCP
PIPE CULVERT RT. SIDE DRAIN
REMOVE AND INSTALL
29" X 18" X 34' ARCH PIPE CULVERT
RT. SIDE DRAIN
CONSTRUCT APPROACH = 20 CU. YDS.

CONCRETE DITCH PAVING

STA.	STA.	HWY.	SIDE	TYPE	"W"	SQ. YDS.
115+05	115+32	HWY. 59	RT.	SPECIAL		18
115+32	117+22	HWY. 59	RT.	B	6'-0"	124
117+22	118+89	HWY. 59	RT.	B	6'-0"	8
118+89	120+35	HWY. 59	RT.	B	6'-0"	74
120+35	122+00	HWY. 59	RT.	B	6'-0"	87

HWY. 59