

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. AID DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO. 050323		1	29	

② DITCH AT L.M. 1.43 STR. & APPRS. (S)

ARKANSAS DEPARTMENT OF TRANSPORTATION
CONSTRUCTION PLANS FOR STATE HIGHWAY


DITCH AT L.M. 1.43 STR. & APPRS. (S)

IZARD COUNTY


ROUTE 69B SECTION 1B

JOB 050323

FED. AID PROJ. NHPP-0033(23)



ARK. HWY. DIST. NO. 5



VICINITY MAP

NOT TO SCALE

DESIGN TRAFFIC DATA


DESIGN YEAR	2038
2018 ADT	360
2038 ADT	440
2038 DHV	48
DIRECTIONAL DISTRIBUTION	0.60
TRUCKS	10%
AVG. RUNNING SPEED	35 MPH

STRUCTURES OVER 20'-0" SPAN

- 1 STA. 109+61.69 CONSTRUCT TRP. 9' X 8' X 54' R.C. BOX CULVERT W/3½ WINGS LT. & RT. SPAN LENGTH = 29'-11" D.A. = 1.44 SQ. MI., Q25= 1070 C.F.S.

STA. 109+21.31
BEGIN JOB 050323
LOG MILE 1.44

STA. 110+02.62
END JOB 050325

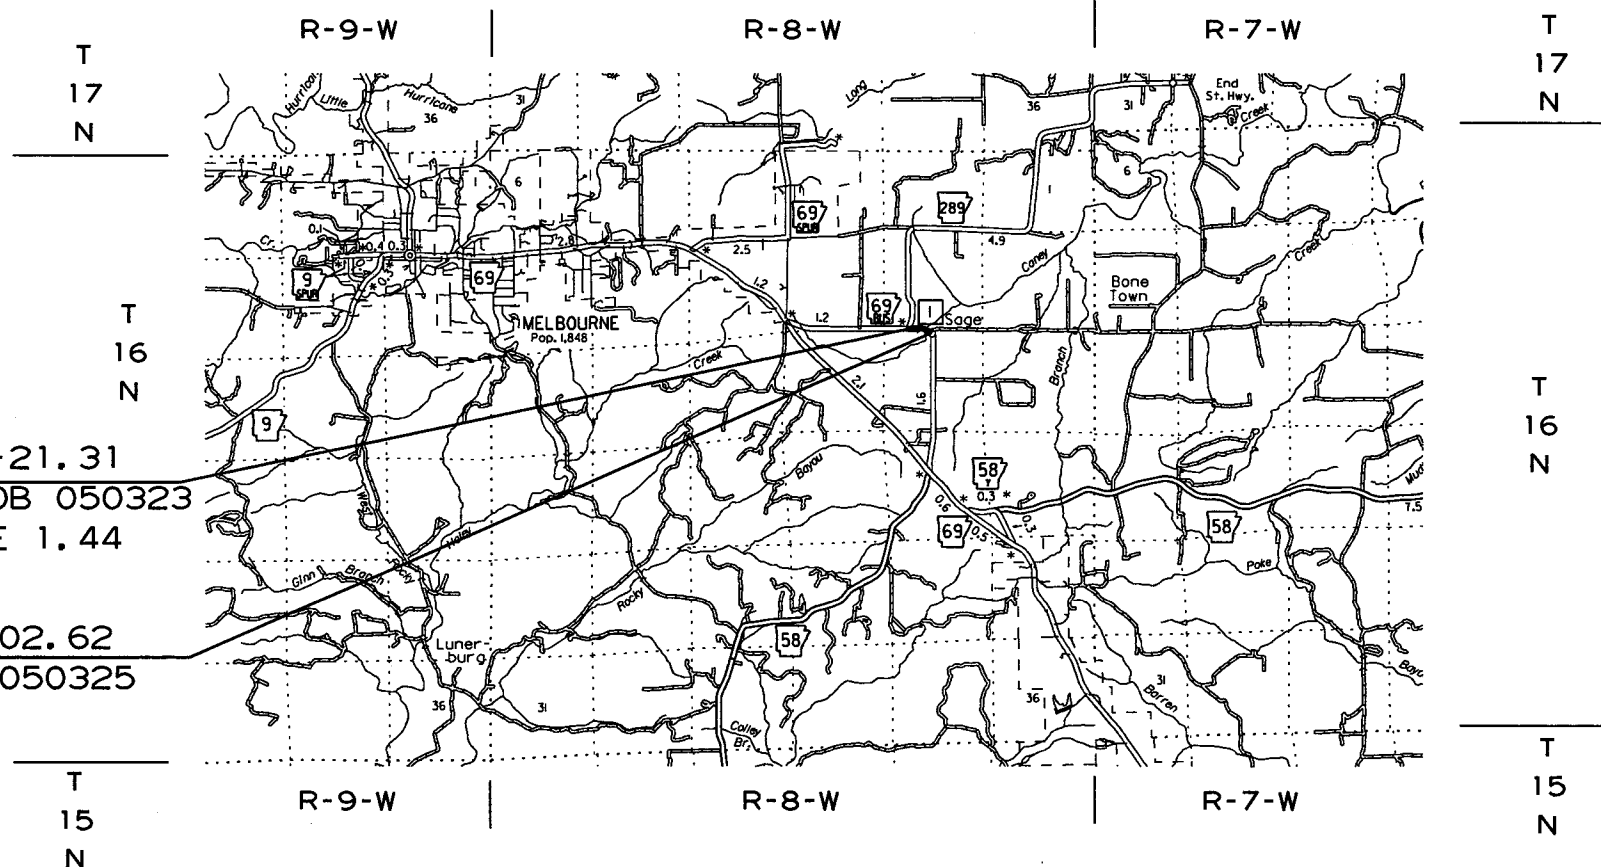


BEGINNING OF PROJECT	MID POINT OF PROJECT	END OF PROJECT
LATITUDE = N 36°02'45"	LATITUDE = N 36°02'45"	LATITUDE = N 36°02'45"
LONGITUDE = W 91°48'58"	LONGITUDE = W 91°48'58"	LONGITUDE = W 91°48'57"

GROSS LENGTH OF PROJECT	81.31 FEET	OR	0.015 MILES
NET " " ROADWAY	51.39 " "	" "	0.010 " "
NET " " BRIDGES	29.92 " "	" "	0.005 " "
NET " " PROJECT	81.31 " "	" "	0.015 " "




APPROVED



7-26-18
DEPUTY DIRECTOR
AND CHIEF ENGINEER

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS	
				6	ARK.				
JOB NO.							050323	2	29

② INDEX OF SHEETS AND STANDARD DRAWINGS



INDEX OF SHEETS

SHEET NO.	TITLE
1	TITLE SHEET
2	INDEX OF SHEETS AND STANDARD DRAWINGS
3	GOVERNING SPECIFICATIONS AND GENERAL NOTES
4	TYPICAL SECTIONS OF IMPROVEMENT
5 - 11	SPECIAL DETAILS
12 - 13	TEMPORARY EROSION CONTROL DETAILS
14 - 15	MAINTENANCE OF TRAFFIC DETAILS
16	PERMANENT PAVEMENT MARKING DETAILS
17 - 20	QUANTITIES
21	SUMMARY OF QUANTITIES AND REVISIONS
22 - 24	SURVEY CONTROL DETAILS
25	PLAN AND PROFILE SHEETS
26 - 29	CROSS SECTIONS

ROADWAY STANDARD DRAWINGS

DRWG.NO.	TITLE	DATE
PBC-1	PRECAST CONCRETE BOX CULVERTS	01-28-15
PM-1	PAVEMENT MARKING DETAILS	06-01-17
PU-1	DETAILS OF PIPE UNDERDRAIN	12-08-16
RCB-1	REINFORCED CONCRETE BOX CULVERT DETAILS	07-26-12
RCB-2	EXCAVATION PAY LIMITS, BACKFILL, & SOLID SODDING FOR BOX CULVERTS	11-20-03
SE-2	TABLES AND METHOD OF SUPERELEVATION FOR TWO-WAY TRAFFIC	10-18-96
TC-1	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	04-13-17
TC-2	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	09-02-15
TC-3	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	09-02-15
TEC-1	TEMPORARY EROSION CONTROL DEVICES	11-16-17
TEC-2	TEMPORARY EROSION CONTROL DEVICES	06-02-94
TEC-3	TEMPORARY EROSION CONTROL DEVICES	11-03-94
TEC-4	TEMPORARY EROSION CONTROL DEVICES	07-26-12
WF-4	WIRE FENCE TYPE C AND D	08-22-02

07/03/2018

R050323.DGN

GOVERNING SPECIFICATIONS

ARKANSAS STATE HIGHWAY COMMISSION STANDARD SPECIFICATIONS FOR HIGHWAY
CONSTRUCTION, EDITION OF 2014, AND THE FOLLOWING SPECIAL PROVISIONS
AND SUPPLEMENTAL SPECIFICATIONS:

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
08-28-18				6	ARK.			
						JOB NO. 050323	3	29

② GOVERNING SPECS. AND GENERAL NOTES

NUMBER	TITLE
ERRATA	ERRATA FOR THE BOOK OF STANDARD SPECIFICATIONS
FHWA-1273	REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS
FHWA-1273	SUPPLEMENT - SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES (23 U.S.C. 140)
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - FEDERAL STANDARDS
FHWA-1273	SUPPLEMENT - POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS
FHWA-1273	SUPPLEMENT - WAGE RATE DETERMINATION
100-3	CONTRACTOR'S LICENSE
100-4	DEPARTMENT NAME CHANGE
102-2	ISSUANCE OF PROPOSALS
108-1	LIQUIDATED DAMAGES
108-2	WORK ALLOWED PRIOR TO ISSUANCE OF WORK ORDER
303-1	AGGREGATE BASE COURSE
400-1	TACK COATS
400-4	DESIGN AND QUALITY CONTROL OF ASPHALT MIXTURES
410-1	CONSTRUCTION REQUIREMENTS AND ACCEPTANCE OF ASPHALT CONCRETE PLANT MIX COURSES
604-1	RETROREFLECTIVE SHEETING FOR TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES
620-1	MULCH COVER
621-1	FILTER SOCKS
JOB 050323	AIRPORT CLEARANCE REQUIREMENTS
JOB 050323	BIDDING REQUIREMENTS AND CONDITIONS
JOB 050323	BROADBAND INTERNET SERVICE FOR ASPHALT CONCRETE PLANT
JOB 050323	BROADBAND INTERNET SERVICE FOR FIELD OFFICE
JOB 050323	CARGO PREFERENCE ACT REQUIREMENTS
JOB 050323	DISADVANTAGED BUSINESS ENTERPRISE BIDDER'S RESPONSIBILITIES
JOB 050323	GOALS FOR DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION
JOB 050323	MAINTENANCE OF TRAFFIC
JOB 050323	MANDATORY ELECTRONIC CONTRACT
JOB 050323	MANDATORY ELECTRONIC DOCUMENT SUBMITTAL
JOB 050323	NESTING SITES OF MIGRATORY BIRDS
JOB 050323	OFF-SITE RESTRAINING CONDITIONS FOR INDIANA AND NORTHERN LONG-EARED BATS
JOB 050323	SHORING FOR CULVERTS
JOB 050323	SOIL STABILIZATION
JOB 050323	SUBMISSION OF ASPHALT CONCRETE HOT MIX ACCEPTANCE TEST RESULTS
JOB 050323	UTILITY ADJUSTMENTS
JOB 050323	WARM MIX ASPHALT
JOB 050323	WELLHEAD PROTECTION



GENERAL NOTES

1. GRADE LINE DENOTES FINISHED GRADE WHERE SHOWN ON PLANS.
2. ALL PIPE LINES, POWER, TELEPHONE, AND TELEGRAPH LINES TO BE MOVED OR LOWERED BY THE RESPECTIVE OWNERS AS PER AGREEMENT WITH SUCH OWNERS.
3. ANY EQUIPMENT OR APPURTENANCE THAT INTERFERES WITH THE PROPOSED CONSTRUCTION AND WHICH MAY BE THE PROPERTY OF UTILITY SERVICE ORGANIZATIONS SHALL BE MOVED BY THE OWNERS UNLESS OTHERWISE PROVIDED.
4. ALL LAND MONUMENTS LOCATED WITHIN THE CONSTRUCTION AREA SHALL BE PROTECTED IN ACCORDANCE WITH SECTION 107.12 OF THE STANDARD SPECIFICATIONS.
5. ALL TREES THAT DO NOT DIRECTLY INTERFERE WITH THE PROPOSED CONSTRUCTION SHALL BE SPARED AS DIRECTED BY THE ENGINEER. CARE AND DISCRETION SHALL BE USED TO INSURE THAT ALL TREES NOT TO BE REMOVED SHALL BE HARMED AS LITTLE AS POSSIBLE DURING THE CONSTRUCTION OPERATIONS.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING A FENCE TO CONTROL LIVESTOCK IN AREAS WHERE PASTURES ARE SEVERED. WIRE FENCE MAY BE CONSTRUCTED INITIALLY, OR IN LIEU THEREOF, THE CONTRACTOR AT HIS OWN EXPENSE, MAY ELECT TO PROVIDE TEMPORARY FENCING SUITABLE TO CONTAIN LIVESTOCK.
7. THIS PROJECT IS COVERED UNDER A SECTION 404 NATIONWIDE 14 PERMIT. REFER TO SECTION 110 OF THE STANDARD SPECIFICATIONS, EDITION OF 2014, FOR PERMIT REQUIREMENTS.
8. ALL FLEXIBLE BASE AND ASPHALTIC PAVEMENTS REMOVED SHALL BE PAID FOR UNDER THE ITEM NO. 210 - UNCLASSIFIED EXCAVATION.
9. THE EXISTING ASPHALT PAVEMENT TO BE REMOVED FROM THE REMAINING PAVEMENT SHALL BE SEPARATED BY SAWING ALONG A NEAT LINE. AFTER SAWING, THE PAVEMENT TO BE REMOVED SHALL BE CAREFULLY REMOVED IN A MANNER THAT WILL NOT DAMAGE THE PAVEMENT THAT IS TO REMAIN. ANY DAMAGE OF THE ASPHALT PAVEMENT THAT IS TO REMAIN IN PLACE SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.



DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. AID DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.		4	29
				JOB NO. 050323				

② TYPICAL SECTIONS OF IMPROVEMENT



HWY. 69B - FULL DEPTH
 STA. 109+21.31 - STA. 110+02.62

NOTES:
 REFER TO CROSS SECTIONS FOR DEVIATION FROM NORMAL SLOPES. NO CHANGES SHALL BE MADE FROM THE PLANNED SLOPES WITHOUT APPROVAL OF THE ENGINEER.

THE THICKNESS OF AGGREGATE BASE SHALL BE WITHIN PLUS OR MINUS ONE INCH OF THE PLAN THICKNESS SHOWN. THE CONTRACTOR WILL CORRECT ANY DEFICIENT THICKNESS THAT DOES NOT MEET TOLERANCE INDICATED. PAYMENT WILL NOT BE MADE FOR MATERIAL PLACED IN EXCESS OF THE TOLERANCE INDICATED.

THE FINAL 2" OF SURFACE COURSE IS NOT TO BE PLACED AFTER ALL OTHER COURSES HAVE BEEN LAID. LONGITUDINAL JOINTS SHALL BE AT LANE LINES.



TYPICAL SECTIONS OF IMPROVEMENT

07/03/2018

R050323.DGN


DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
JOB NO. 050323							5	29

2 SPECIAL DETAILS



DETAIL SHOWING TAPER TO EXISTING PAVEMENT

• TO BE USED AS DIRECTED BY THE ENGINEER



DETAIL OF SILT FENCE

AT R.C. BOX

07/03/2018

R050323.DGN

MID-SECTION

Table with columns for R.C. BOX SECTION, TOP SLAB REINFORCING STEEL, BOTTOM SLAB REINFORCING STEEL, SIDE WALL REINFORCING STEEL, INTERIOR WALL REINFORCING STEEL, TOP SLAB DISTRIBUTION REINFORCING STEEL, BOTTOM SLAB DISTRIBUTION REINFORCING STEEL, SIDE WALL DISTRIBUTION REINFORCING STEEL, INTERIOR WALL DISTRIBUTION REINFORCING STEEL, CLASS 'S' CONCRETE, and REINFORCING STEEL.

Table with columns for CLASS 'S' CONCRETE (CU. YDS.) and REINFORCING STEEL (LBS.).

SHEET 1 OF 2
DETAILS OF R.C. BOX CULVERT
TRIPLE BARREL BOX CULVERT
Sta. 109+61.69
SPECIAL DETAILS

INLET SLOPE SECTION(S)

Table with columns for R.C. BOX SECTION, DESIGN FILL DEPTH, CLEAR SPAN, CLEAR HEIGHT, TOP SLAB THK., BOTTOM SLAB THK., SIDE WALL THK., INTERIOR WALL THK., OVER ALL WIDTH, OVER ALL HEIGHT, SECTION LENGTH, BOTTOM SLAB REINFORCING STEEL, SIDE WALL REINFORCING STEEL, INTERIOR WALL REINFORCING STEEL, TOP SLAB DISTRIBUTION REINFORCING STEEL, BOTTOM SLAB DISTRIBUTION REINFORCING STEEL, SIDE WALL DISTRIBUTION REINFORCING STEEL, INTERIOR WALL DISTRIBUTION REINFORCING STEEL, CLASS 'S' CONCRETE, and REINFORCING STEEL.

Table with columns for CLASS 'S' CONCRETE (CU. YDS.) and REINFORCING STEEL (LBS.).

STRUCTURE DESIGNED TO ALLOW FOR ACCUMULATION OF SEDIMENT. FUTURE MAINTENANCE ACTIVITIES SHOULD NOT REMOVE THE BOTTOM 1' OF SEDIMENT.

Data shown for Mid-Section, Slope Section(s), and Skewed End Section is based on the design fill depth shown in the table, see PLAN AND PROFILE SHEETS for actual fill depth.

INLET SKEWED END SECTION

Table with columns for SKEW (DEGREE), SLOPE, DESIGN FILL DEPTH, CLEAR SPAN, CLEAR HEIGHT, SECTION LENGTH, TOP SLAB THK., HDWL DEPTH, BOTTOM SLAB THK., SIDE WALL THK., INTERIOR WALL THK., OVER ALL WIDTH, OVER ALL HEIGHT, TOP SLAB REINFORCING STEEL, BOTTOM SLAB REINFORCING STEEL, SIDE WALL REINFORCING STEEL, INTERIOR WALL REINFORCING STEEL, TOP SLAB DISTRIBUTION REINFORCING STEEL, BOTTOM SLAB DISTRIBUTION REINFORCING STEEL, SIDE WALL DISTRIBUTION REINFORCING STEEL, INTERIOR WALL DISTRIBUTION REINFORCING STEEL, CLASS 'S' CONCRETE, and REINFORCING STEEL.

Table with columns for CLASS 'S' CONCRETE (CU. YDS.) and REINFORCING STEEL (LBS.).

Any Bar Lap Required for the Skewed End Section shall be considered subsidiary to the item "Reinforcing Steel - Roadway (Gr. 60)."

INLET WINGWALL TABLE

Table with columns for OVER ALL WIDTH, CLEAR HEIGHT, FOOTING THK., WING WALL THK., BOX SKEW (DEG.), SLOPE, HDWL LENGTH, HEEL, WALL HEIGHT, WINGWALL ANGLE (DEGREE), WIDTH OF WING FOOTINGS AT HDWL, FOOTING DIMENSION PARALLEL WITH HDWL, LENGTH OF WINGWALLS, LENGTH OF FOOTING HEEL, CLASS 'S' CONCRETE, and REINFORCING STEEL.

MID-SECTION BAR LAP TABLE


Table with columns for # of Long. Laps Req'd and Section Length.

Table with columns for Min. Bar Lap Length and Bar Pin Dia. Table.

This drawing to be used in conjunction with SHEET 1 OF 4, "GENERAL DETAILS OF R.C. BOX CULVERT"; SHEET 3 OF 4, "GENERAL DETAILS OF R.C. BOX CULVERT"; SHEET 4 OF 4, "GENERAL DETAILS OF R.C. BOX CULVERT"; and STANDARD DRAWING RCB-2.

For additional information and outlet sections, see Sheet 2 of 2.

Table with columns for DATE REVISED, DATE FILMED, DATE REVISED, DATE FILMED, JOB NO., and SPECIAL DETAILS.



TABULAR DATA BY: WAC DATE: 6/18/18
CHECKED BY: LJB DATE: 7/17/18

OUTLET SLOPE SECTION(S)

Table for Outlet Slope Section(S) detailing dimensions and reinforcement for various sections (HD, ADDITIONAL REINF. FOR HDWL, *h* HDWL BARS).

Table for Class 'S' Concrete and Reinforcing Steel, showing quantities in cu. yds. and lbs.

STRUCTURE DESIGNED TO ALLOW FOR 1' ACCUMULATION OF SEDIMENT. FUTURE MAINTENANCE ACTIVITIES SHOULD NOT REMOVE THE BOTTOM 1' OF SEDIMENT.

SHEET 2 OF 2
DETAILS OF R.C. BOX CULVERT
TRIPLE BARREL BOX CULVERT
Sta. 109+61.69

SPECIAL DETAILS

OUTLET SKEWED END SECTION

Table for Outlet Skewed End Section detailing dimensions (SK, SL, D, S, H, LL, T, HD, B, C, W, OW, OH) and reinforcement requirements for top and bottom slabs, side walls, and interior walls.

Table for Class 'S' Concrete and Reinforcing Steel quantities for the Skewed End Section.

OUTLET WINGWALL TABLE

Main table for Outlet Wingwall Table detailing dimensions (OW, H, WB, CW, SK, SL, K, HL, WH1, WH2, AF1, AF2, WE, WING A/B, FOOTING DIMENSION, LENGTH OF WINGWALLS, LENGTH OF FOOTING HEEL) and reinforcement details for 12 different wing wall sections (F1-F12).


Min. Bar Lap Length table showing required lengths for bar sizes #4 through #8.

Bar Pin Dia. Table showing pin diameters for bar sizes #4 through #8.

Any Bar Lap Required for the Skewed End Section shall be considered subsidiary to the Item "Reinforcing Steel - Roadway (Gr. 60)."

Table for Date Revised and Date Filmed, with 4 columns for each.

SPECIAL DETAILS




TABULAR DATA BY: WAC DATE: 6/18/18
CHECKED BY: LJB DATE: 7/17/18

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO.	050323	8 29
SPECIAL DETAILS								

2:1 Slope	20'-0"	10'-0"	10'-0"	10'-0"	10'-0"	10'-0"	10'-0"
3:1 Slope	30'-0"	15'-0"	15'-0"	15'-0"	15'-0"	15'-0"	15'-0"
4:1 Slope	40'-0"	20'-0"	20'-0"	20'-0"	20'-0"	20'-0"	20'-0"

Note: For fill depths 10' and under, use Mid-Section full length of box culvert.


* LL = Skewed End Section Length - See "Skewed End Section Details"
Length LL varies with skew angle, overall box width and fill depth and may eliminate the need for some slope section lengths as shown.

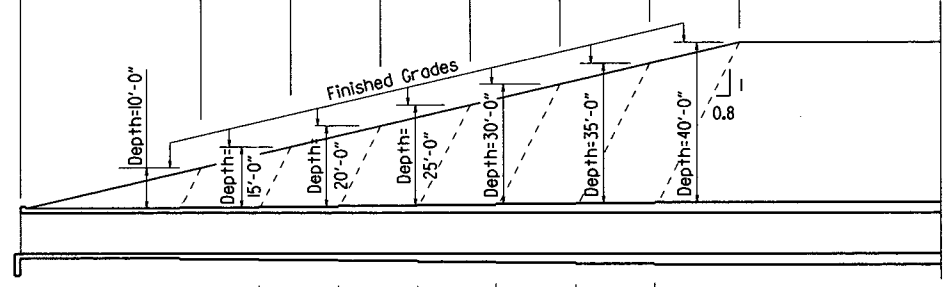

Slope Section Length @ 2:1 Slope	A=12'-0"	B=6'-0"	C=6'-0"	D=6'-0"	E=6'-0"	F=6'-0"	G=6'-0"	Mid-Section Length - Varies
Slope Section Length @ 3:1 Slope	A=22'-0"	B=11'-0"	C=11'-0"	D=11'-0"	E=11'-0"	F=11'-0"	G=11'-0"	Mid-Section Length - Varies
Slope Section Length @ 4:1 Slope	A=32'-0"	B=16'-0"	C=16'-0"	D=16'-0"	E=16'-0"	F=16'-0"	G=16'-0"	Mid-Section Length - Varies

LONGITUDINAL SECTION LENGTH SCHEDULE FOR VARYING FILL DEPTHS OVER 10'

Lengths for Non-Skewed Boxes



SKewed SECTION LAYOUT FOR VARYING FILL DEPTHS OVER 10'



GENERAL NOTES:

CONSTRUCTION SPECIFICATIONS: Arkansas State Highway and Transportation Department Standard Specifications for Highway Construction (2014 edition) with applicable Supplemental Specifications and Special Provisions. Section and Subsection refer to the Standard Construction Specifications unless otherwise noted in the Plans.

DESIGN SPECIFICATIONS: AASHTO LRFD Bridge Design Specifications, Fifth Edition (2010) with 2010 interim revisions.

LIVE LOADING: HL-93

All concrete shall be Class 5 with a minimum 28-day compressive strength of 3,500 psi and shall be poured in the dry. All exposed corners to have 3/4" chamfers.

Reinforcing Steel shall be Grade 60 (yield strength = 60,000 psi) conforming to AASHTO M31 or M322, Type A, with mill test reports.

Reinforcing Steel Tolerances: The tolerances for reinforcing steel shall meet those listed in 'Manual of Standard Practice' published by Concrete Reinforcing Steel Institute (CRSI) except that the tolerance for truss bars such as Figure 3 on page 7-4 of the CRSI Manual shall be minus zero to plus 1/2 inch.

Excavation and backfilling shall be in accordance with the requirements of Section 801.

Membrane Waterproofing shall conform to the requirements of Section 815. Membrane Waterproofing shall be Type C and as directed by the Engineer applied to all construction joints in the top slab and the sidewalls of R.C. Box culverts and to the construction joint between wingwalls and R.C. Box culvert walls.

Weep Holes in box culvert walls shall have a maximum horizontal spacing of 10'-0" and shall be spaced to clear all reinforcing steel. The drain opening shall be 4" diameter and shall be placed 12" above the top of the bottom slab.


Weep Holes in wingwalls shall have a maximum horizontal spacing of 10'-0" and shall be spaced to clear all reinforcing steel. There shall be a minimum of two (2) weep holes in each wingwall. The drain opening shall be 4" diameter and shall be placed 12" above the top of the wingwall footing.

The barrel components of the culvert may be constructed using continuous pours. For longer culvert construction, the Contractor may use multiple pours with transverse construction joints spaced a minimum of 50 feet apart unless superseded by stage construction or site constraints as approved by the Engineer. Construction joints between footings and walls shall be made only where shown in the Plans. Joints shall be normal to the centerline of barrel and shall be keyed. Longitudinal reinforcing shall be continuous through joints unless shown otherwise. All longitudinal construction joints shall be submitted to the Engineer for approval.

Membrane Waterproofing, Weep Holes, Geotextile Filter Fabric, and Drainage Fill Material will not be paid for directly but shall be considered subsidiary to Class 5 Concrete.


When the top slab of the box culvert serves as finished roadway surface, curing and finishing shall be in accordance with subsections 802.17 and 802.20 for bridge roadway surface and a fine finish shall be applied in accordance with subsection 802.19 for Class 5 Tined Bridge Roadway Surface Finish. Curing and finishing shall not be paid for directly, but shall be considered incidental to the item "Class 5 Concrete-Roadway". Class 1 Protective Surface Treatment shall be applied to the roadway surface and this work shall be paid for under the unit price bid for "Class 1 Protective Surface Treatment".

When precast reinforced concrete box culverts are substituted for cast in place box culverts, they shall be manufactured according to ASTM C 1577 and meet the requirements of Section 607. When the top slab of the box culvert serves as the finished roadway surface, a precast reinforced concrete box culvert substitution is not allowed.



CULVERT DRAINAGE DETAIL FOR ROCK FILL

This detail shall be used when rock fill is specified for embankment construction.



VERTICAL FABRIC ALTERNATE

(Shown for Culvert, Similar for Wingwall)

WRAPPED FABRIC ALTERNATE

(Shown for Wingwall, Similar for Culvert)

WINGWALL & CULVERT DRAINAGE DETAIL

For Details of Excavation and Pay Limits, see Standard Drawing RCB-2.

STRUCTURE DESIGNED TO ALLOW FOR 1' ACCUMULATION OF SEDIMENT. FUTURE MAINTENANCE ACTIVITIES SHOULD NOT REMOVE THE BOTTOM 1' OF SEDIMENT.

SHEET 1 OF 4
GENERAL DETAILS OF R.C. BOX CULVERT
GENERAL NOTES &
LONGITUDINAL SECTION LENGTH SCHEDULE
SPECIAL DETAILS




V 1:14 B050323_culvert.dgn

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.	050323		9	29


① SPECIAL DETAILS



Note: When top slab of culvert serves as finished roadway surface, see General Notes on Sheet 1 of 4.




TYPICAL SECTION M-M




LONGITUDINAL LAP DETAIL AT CHANGE IN SECTIONS

TOP SLAB SHOWN, BOTTOM SLAB SIMILAR




TOP SLAB REINFORCEMENT




WINGWALL ATTACHMENT

See "Details of Wingwalls" for additional information and wingwall details.




"h" bars sketch




PART LONGITUDINAL SECTION

(Non-Skewed Ends)




PART LONGITUDINAL SECTION N-N

(Skewed Ends)



TYPICAL KEYWAY DETAIL

(All Construction Joints)



BOTTOM SLAB REINFORCEMENT

SKewed END SECTION DETAILS

SHEET 2 OF 4
GENERAL DETAILS OF R.C. BOX CULVERT

DETAILS OF SINGLE BARREL
R.C. BOX CULVERT


SPECIAL DETAILS

STRUCTURE DESIGNED TO ALLOW FOR 1' ACCUMULATION OF SEDIMENT. FUTURE MAINTENANCE ACTIVITIES SHOULD NOT REMOVE THE BOTTOM 1' OF SEDIMENT.



*2" clr. for fill depth (D) greater than 2 ft.
 2 1/2" clr. for fill depth (D) equal to or less than 2 ft.


Note: When top slab of culvert serves as finished roadway surface, see General Notes on Sheet 1 of 4.




TYPICAL SECTION M-M

Top Slab
 Straight "c" bars shall alternate with Bent "b" bars in top.
 Straight "a" bars shall alternate with Bent "b" bars in bottom.


Bottom Slab
 Straight "d" bars shall alternate with Bent "bl" bars in top.
 Straight "f" bars shall alternate with Bent "bl" bars in bottom.



"h" bars sketch

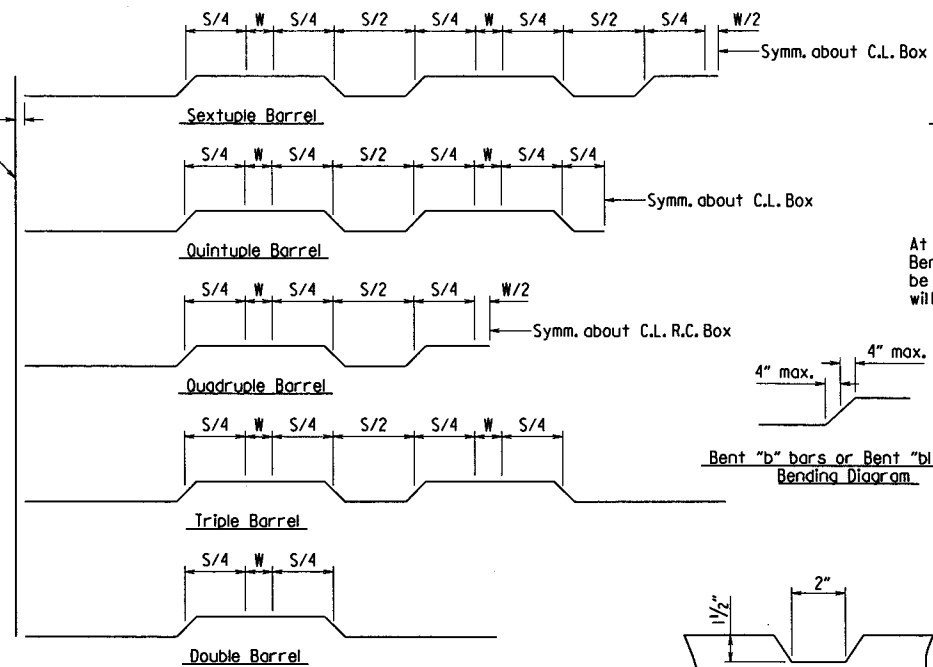

Bent "b" bars or Bent "bl" bars sketch




TYPICAL KEYWAY DETAIL
 (All Construction Joints)

DATE REVISED	DATE FILMED	REVISED	DATE FILMED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO.	050323	10 29


SPECIAL DETAILS

STATE OF ARKANSAS
 LICENSED PROFESSIONAL ENGINEER
 No. 9235
 7-18-18
 CHARLES R. ELLIS

At the Contractor's option in lieu of providing Bent "b" or Bent "bl" bars, one bar top and bottom of equivalent size may be substituted for each bent bar. Payment for the reinforcing will be based on the weight of the "b" or "bl" bar.




TOP SLAB REINFORCEMENT
 Straight "c" bars in top.
 Straight "a" bars in bottom.




LONGITUDINAL LAP DETAIL AT CHANGE IN SECTIONS
 TOP SLAB SHOWN, BOTTOM SLAB SIMILAR


Longitudinal Bar Spacing at individual sections shall be maintained, which may result in noncontact bar laps.




SKEWED END SECTION DETAILS
 BOTTOM SLAB REINFORCEMENT
 Straight "d" bars in top.
 Straight "f" bars in bottom.



PART LONGITUDINAL SECTION
 (Non-Skewed Ends)



PART LONGITUDINAL SECTION N-N
 (Skewed Ends)



WINGWALL ATTACHMENT
 See "Details of Wingwalls" for additional information and wingwall details.



STRUCTURE DESIGNED TO ALLOW FOR 1' ACCUMULATION OF SEDIMENT. FUTURE MAINTENANCE ACTIVITIES SHOULD NOT REMOVE THE BOTTOM 1' OF SEDIMENT.

SHEET 3 OF 4
GENERAL DETAILS OF R.C. BOX CULVERT
DETAILS OF MULTI-BARREL R.C. BOX CULVERT
SPECIAL DETAILS


b050323_culvert.dgn

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.	050323	11	29


1 SPECIAL DETAILS




END ELEVATION
Flared Wingwalls Shown



TYPICAL KEYWAY DETAIL
All Construction Joints




PART PLAN - FLARED WINGWALLS



WINGWALL ELEVATION
Showing Back Face Reinforcement


Note: See "Wingwall Section P-P" for additional details and reinforcing.

For square ends make the shaded area thickness the greater of WB and B (Bottom Slab Thickness). For skewed ends make the shaded area thickness the greater of WB and (B+HW).




PLAN - FLARED WINGWALLS
Showing Footing Reinforcement

For square ends make the shaded area thickness the greater of WB and B (Bottom Slab Thickness). For skewed ends make the shaded area thickness the greater of WB and (B+HW).




PLAN - PARALLEL WINGWALLS
Showing Footing Reinforcement



WINGWALL SECTION P-P


Short Wing = (AF1+SK)
Long Wing = (AF2-SK)




F1, F2, F3, & F6 BARS *F12 BAR

*F12 is a straight bar for parallel wingwalls

STRUCTURE DESIGNED TO ALLOW FOR ACCUMULATION OF SEDIMENT. FUTURE MAINTENANCE ACTIVITIES SHOULD NOT REMOVE THE BOTTOM 1' OF SEDIMENT.



PART PLAN - PARALLEL WINGWALLS





CONSTRUCTION JOINTS
Flared Wingwalls Shown

SHEET 4 OF 4
GENERAL DETAILS OF R.C. BOX CULVERT
DETAILS OF WINGWALLS
SPECIAL DETAILS

b050323_culvert.dgn

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.		12	29

2 TEMPORARY EROSION CONTROL DETAILS

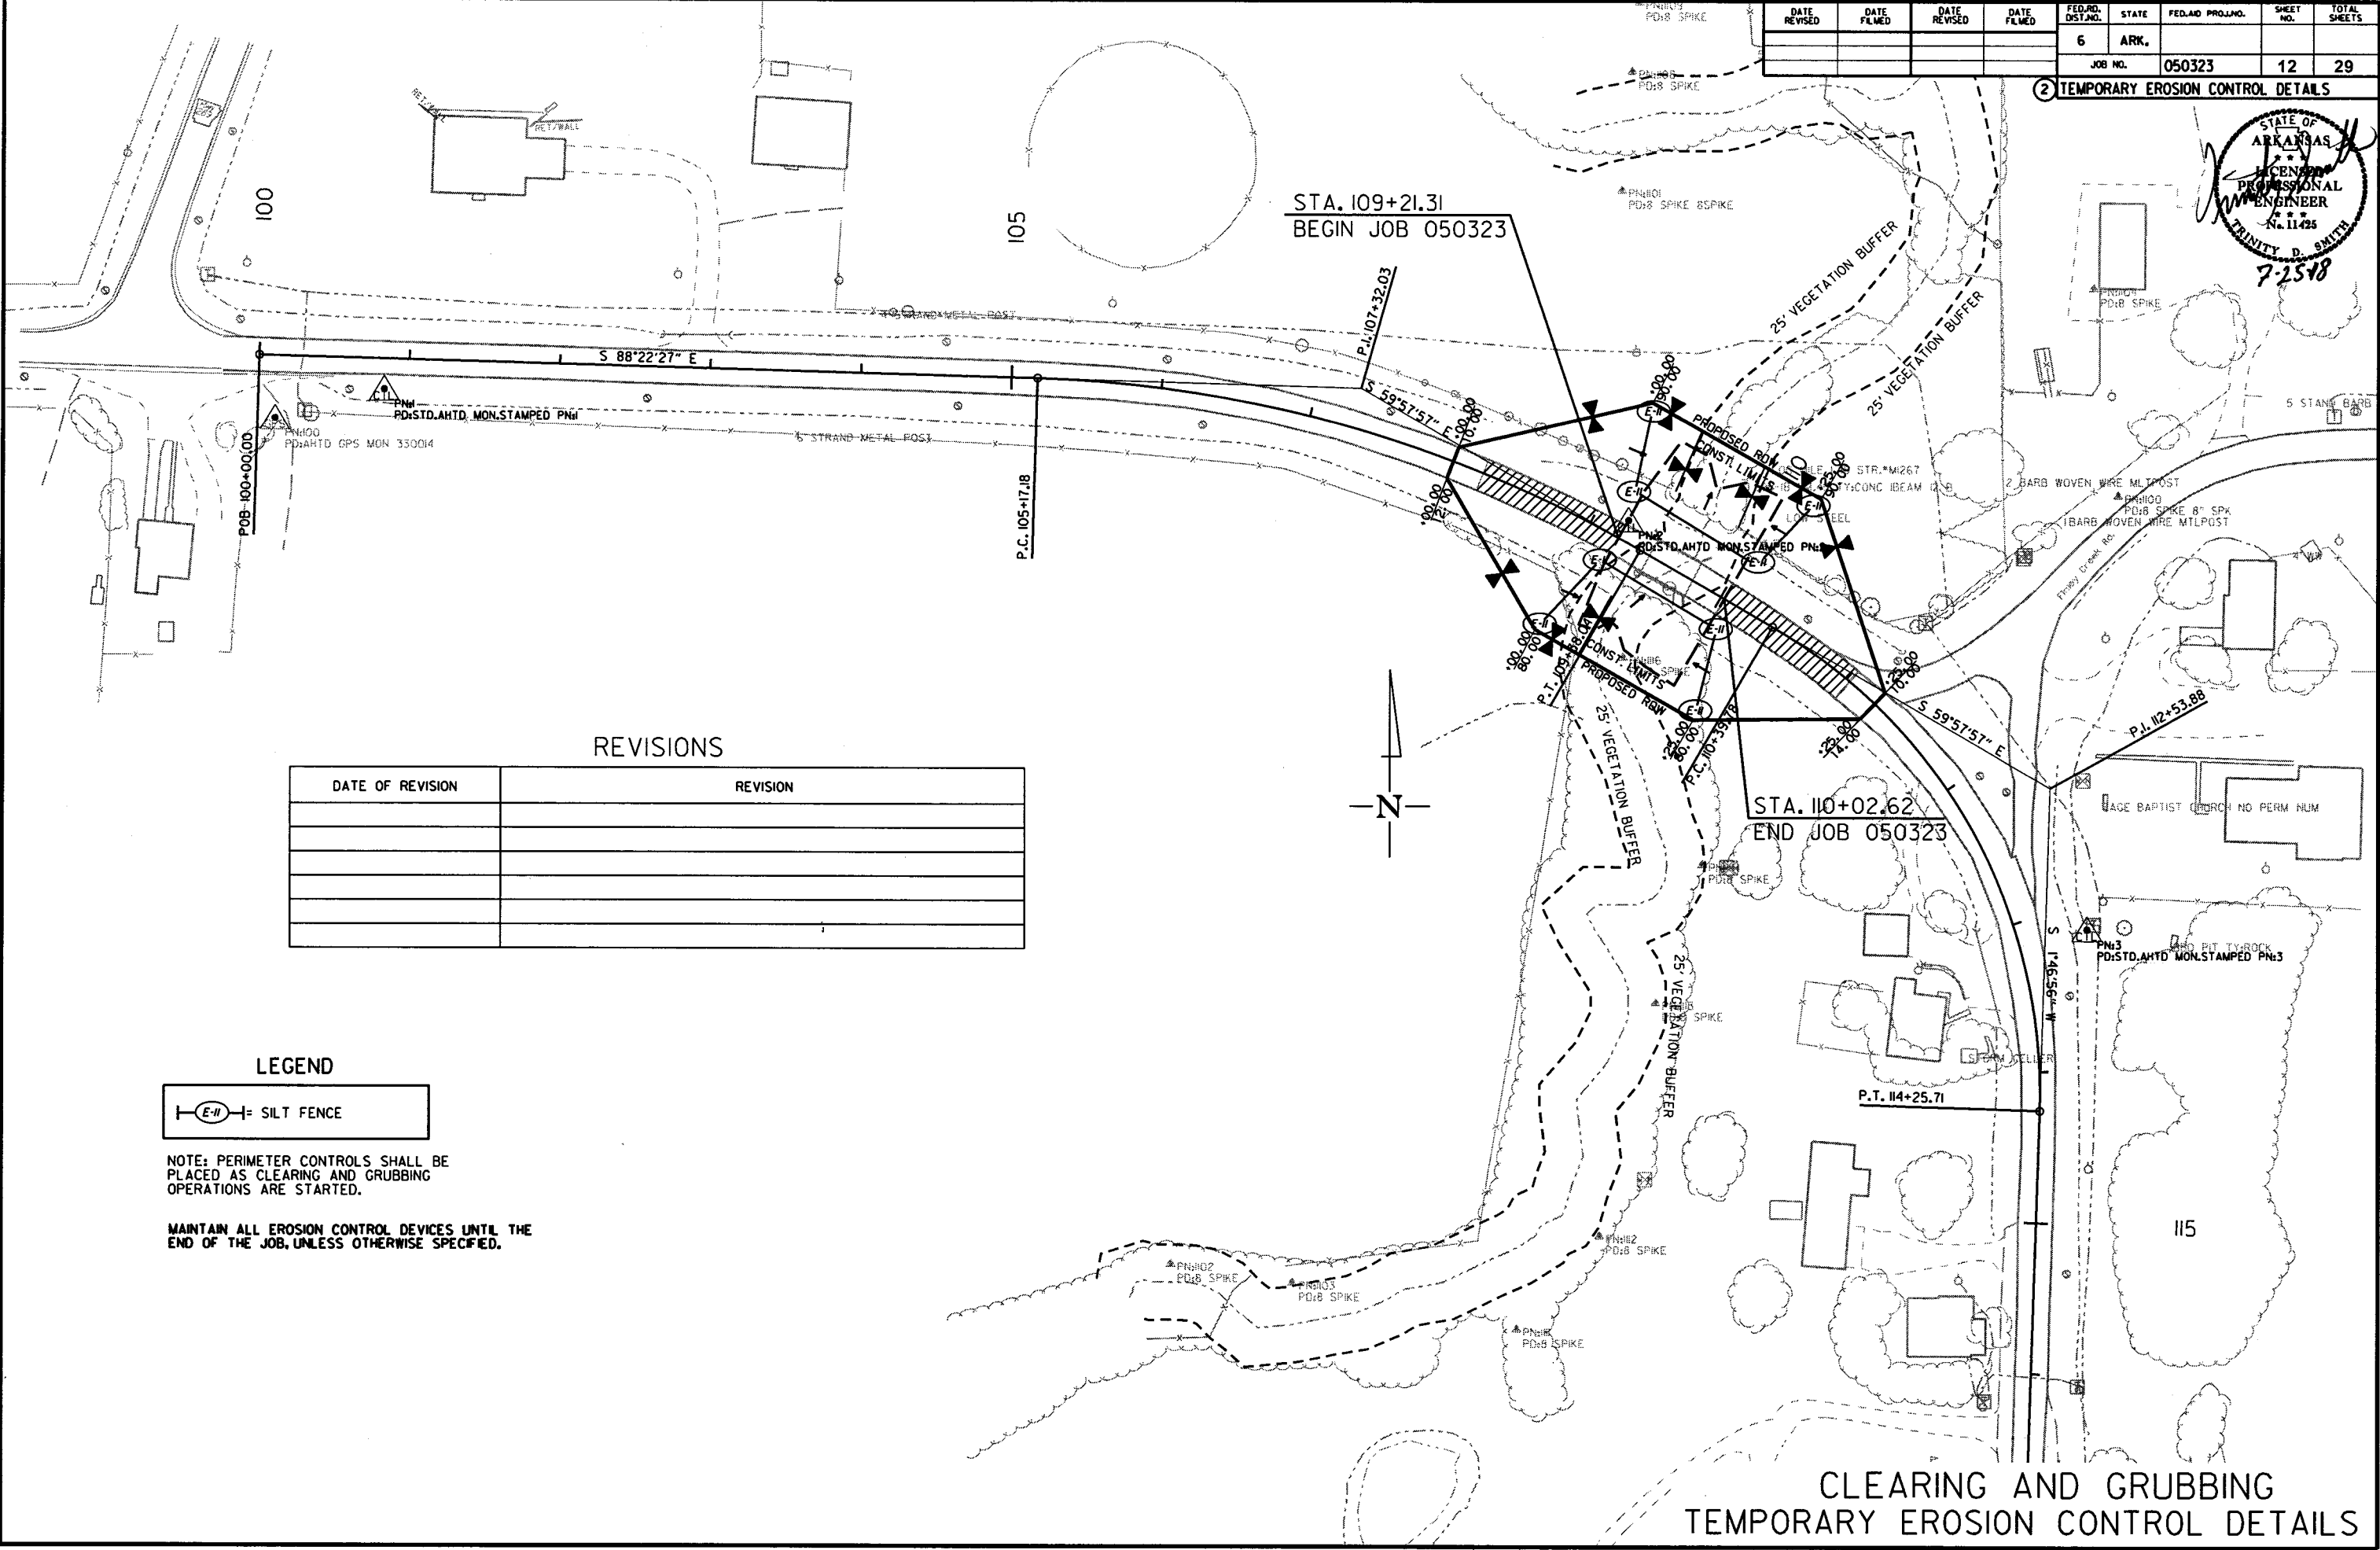

REVISIONS

DATE OF REVISION	REVISION

LEGEND

SILT FENCE

NOTE: PERIMETER CONTROLS SHALL BE PLACED AS CLEARING AND GRUBBING OPERATIONS ARE STARTED.



MANTAIN ALL EROSION CONTROL DEVICES UNTIL THE END OF THE JOB, UNLESS OTHERWISE SPECIFIED.

CLEARING AND GRUBBING
TEMPORARY EROSION CONTROL DETAILS

07/03/2018
R050323.DGN

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
JOB NO. 050323							13	29

2 TEMPORARY EROSION CONTROL DETAILS

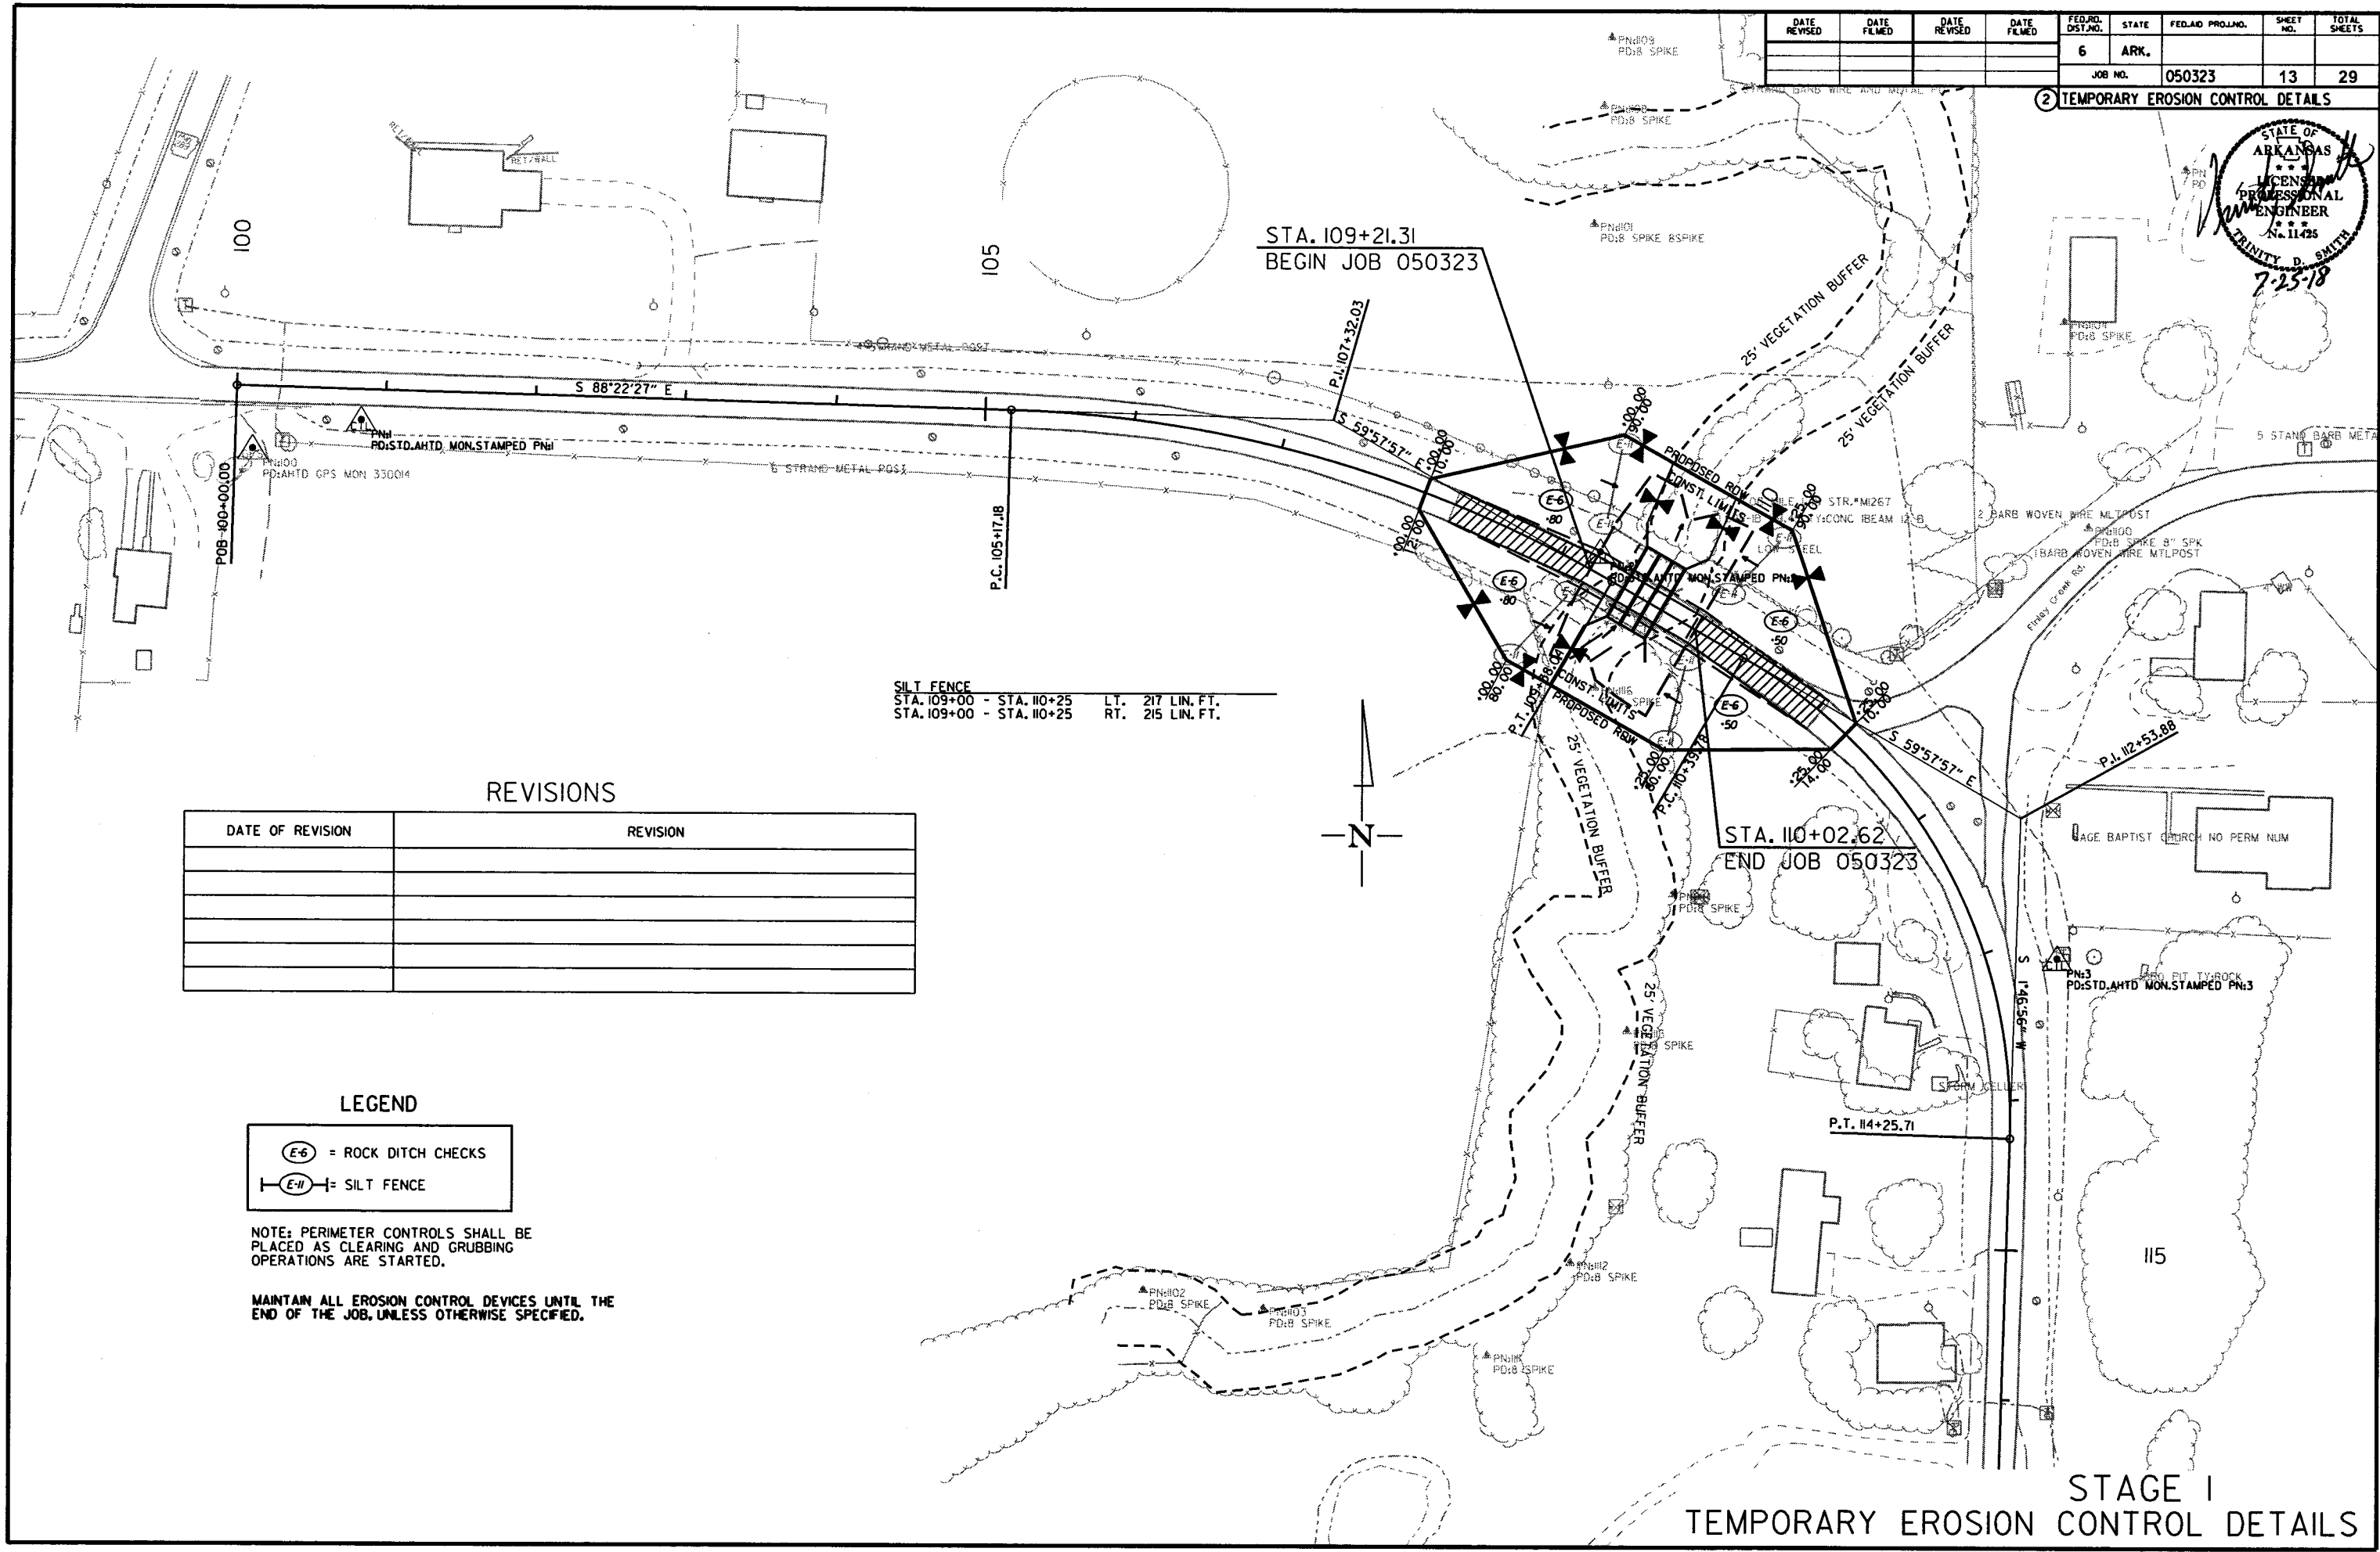

SILT FENCE
 STA. 109+00 - STA. 110+25 LT. 217 LIN. FT.
 STA. 109+00 - STA. 110+25 RT. 215 LIN. FT.

REVISIONS

DATE OF REVISION	REVISION

LEGEND

(E-6) = ROCK DITCH CHECKS
 (E-11) = SILT FENCE

NOTE: PERIMETER CONTROLS SHALL BE PLACED AS CLEARING AND GRUBBING OPERATIONS ARE STARTED.

MAINTAIN ALL EROSION CONTROL DEVICES UNTIL THE END OF THE JOB, UNLESS OTHERWISE SPECIFIED.



STAGE I
 TEMPORARY EROSION CONTROL DETAILS

07/03/2018

R050323.DGN

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.	050323		14	29

② MAINTENANCE OF TRAFFIC DETAILS

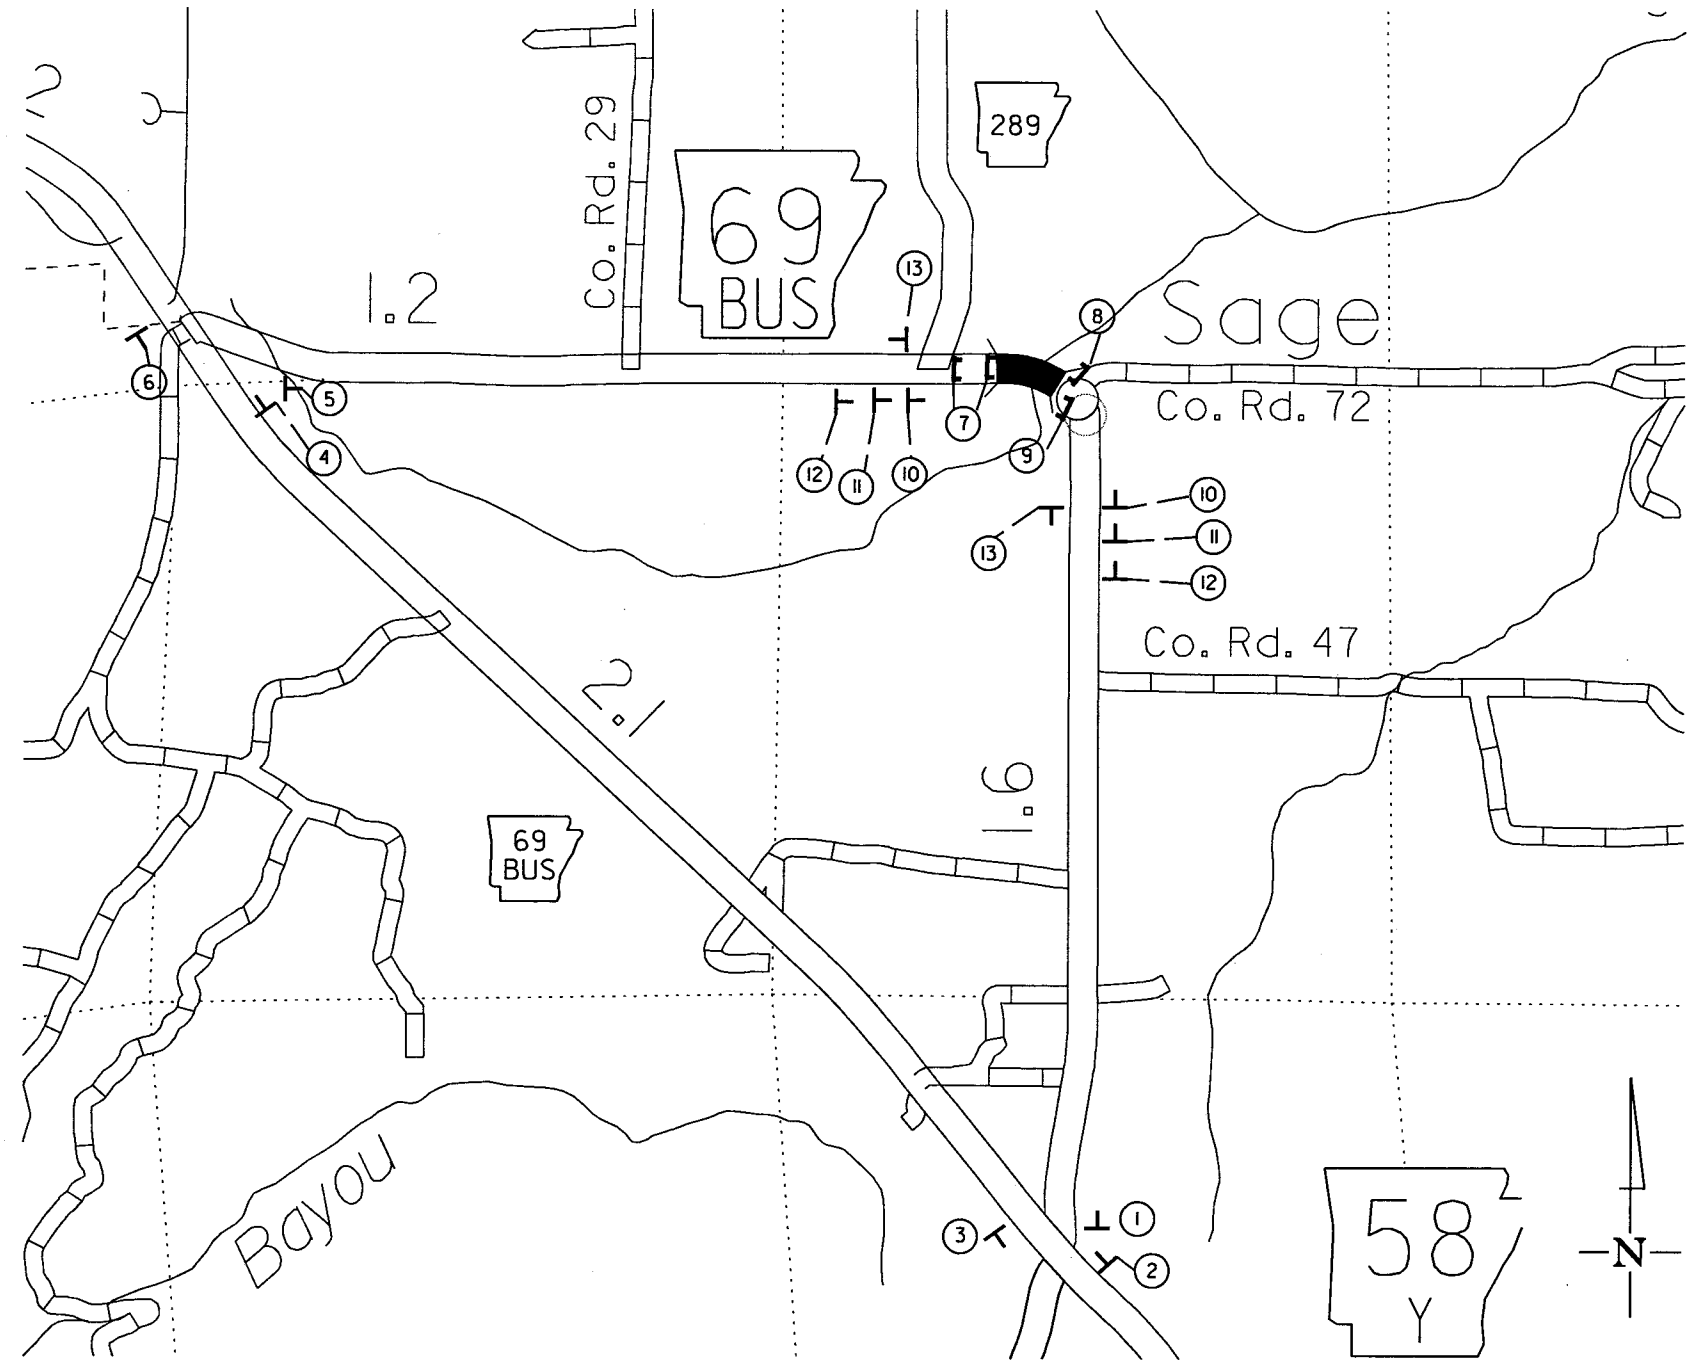

- ① ROAD CLOSED (1) RH-3A (60" X 30")
1/4 MILES AHEAD LOCAL TRAFFIC ONLY
- ② CO. RD. 29 (1) D3-1 (36" X 12")
HWY. 289 (1) D3-1 (36" X 12")
DETOUR (1) M4-8 (24" X 12")
(1) M6-3 (21" X 15")
- ③ CO. RD. 47 (1) D3-1 (36" X 12")
CO. RD. 72 (1) D3-1 (36" X 12")
DETOUR (1) M4-8 (24" X 12")
(1) M6-1 (21" X 15")
- ④ CO. RD. 29 (1) D3-1 (36" X 12")
HWY. 289 (1) D3-1 (36" X 12")
DETOUR (1) M4-8 (24" X 12")
(1) M6-1 (21" X 15")
- ⑤ ROAD CLOSED (1) RH-3A (60" X 30")
1/4 MILES AHEAD LOCAL TRAFFIC ONLY
- ⑥ CO. RD. 47 (1) D3-1 (36" X 12")
CO. RD. 72 (1) D3-1 (36" X 12")
DETOUR (1) M4-8 (24" X 12")
(1) M6-3 (21" X 15")



- ⑦ ROAD CLOSED (1) RH-2 (48" X 30")
16' BARR. TYP. IN RT.
16' BARR. TYP. IN LT.
- ⑧ ROAD CLOSED (3) RH-2 (48" X 30")
16' BARR. TYP. IN RT.
16' BARR. TYP. IN LT.
- ⑨ ROAD CLOSED (1) RH-2 (48" X 30")
16' BARR. TYP. IN LT.
16' BARR. TYP. IN RT.
- ⑩ ROAD CLOSED 500 FT (1) W20-3 (48" X 48")
- ⑪ ROAD CLOSED 1000 FT (1) W20-3 (48" X 48")
- ⑫ ROAD CLOSED 500 FT (1) W20-3 (48" X 48")
- ⑬ END ROAD WORK (1) G20-2 (48" X 24")

PROPOSED DETOUR ROUTE

SEQUENCE OF OPERATIONS
 PLACE DETOUR SIGNAGE
 TEMPORARILY CLOSE HWY. 69B AND MAINTAIN TRAFFIC ON DETOUR (SEE ROAD CLOSURE DETOUR DETAIL)
 REMOVE EXISTING BRIDGE STRUCTURE
 CONSTRUCT TRP. 9'x8'x54' R.C. BOX CULVERT AND EMBANKMENT
 COLD MILL TRANSITIONS AT JOB ENDS
 PLACE FINAL LIFT OF SURFACE
 PLACE FINAL STRIPING
 REOPEN CLOSED SECTION OF HWY. 69B

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
JOB NO. 050323							15	29

2 MAINTENANCE OF TRAFFIC DETAILS

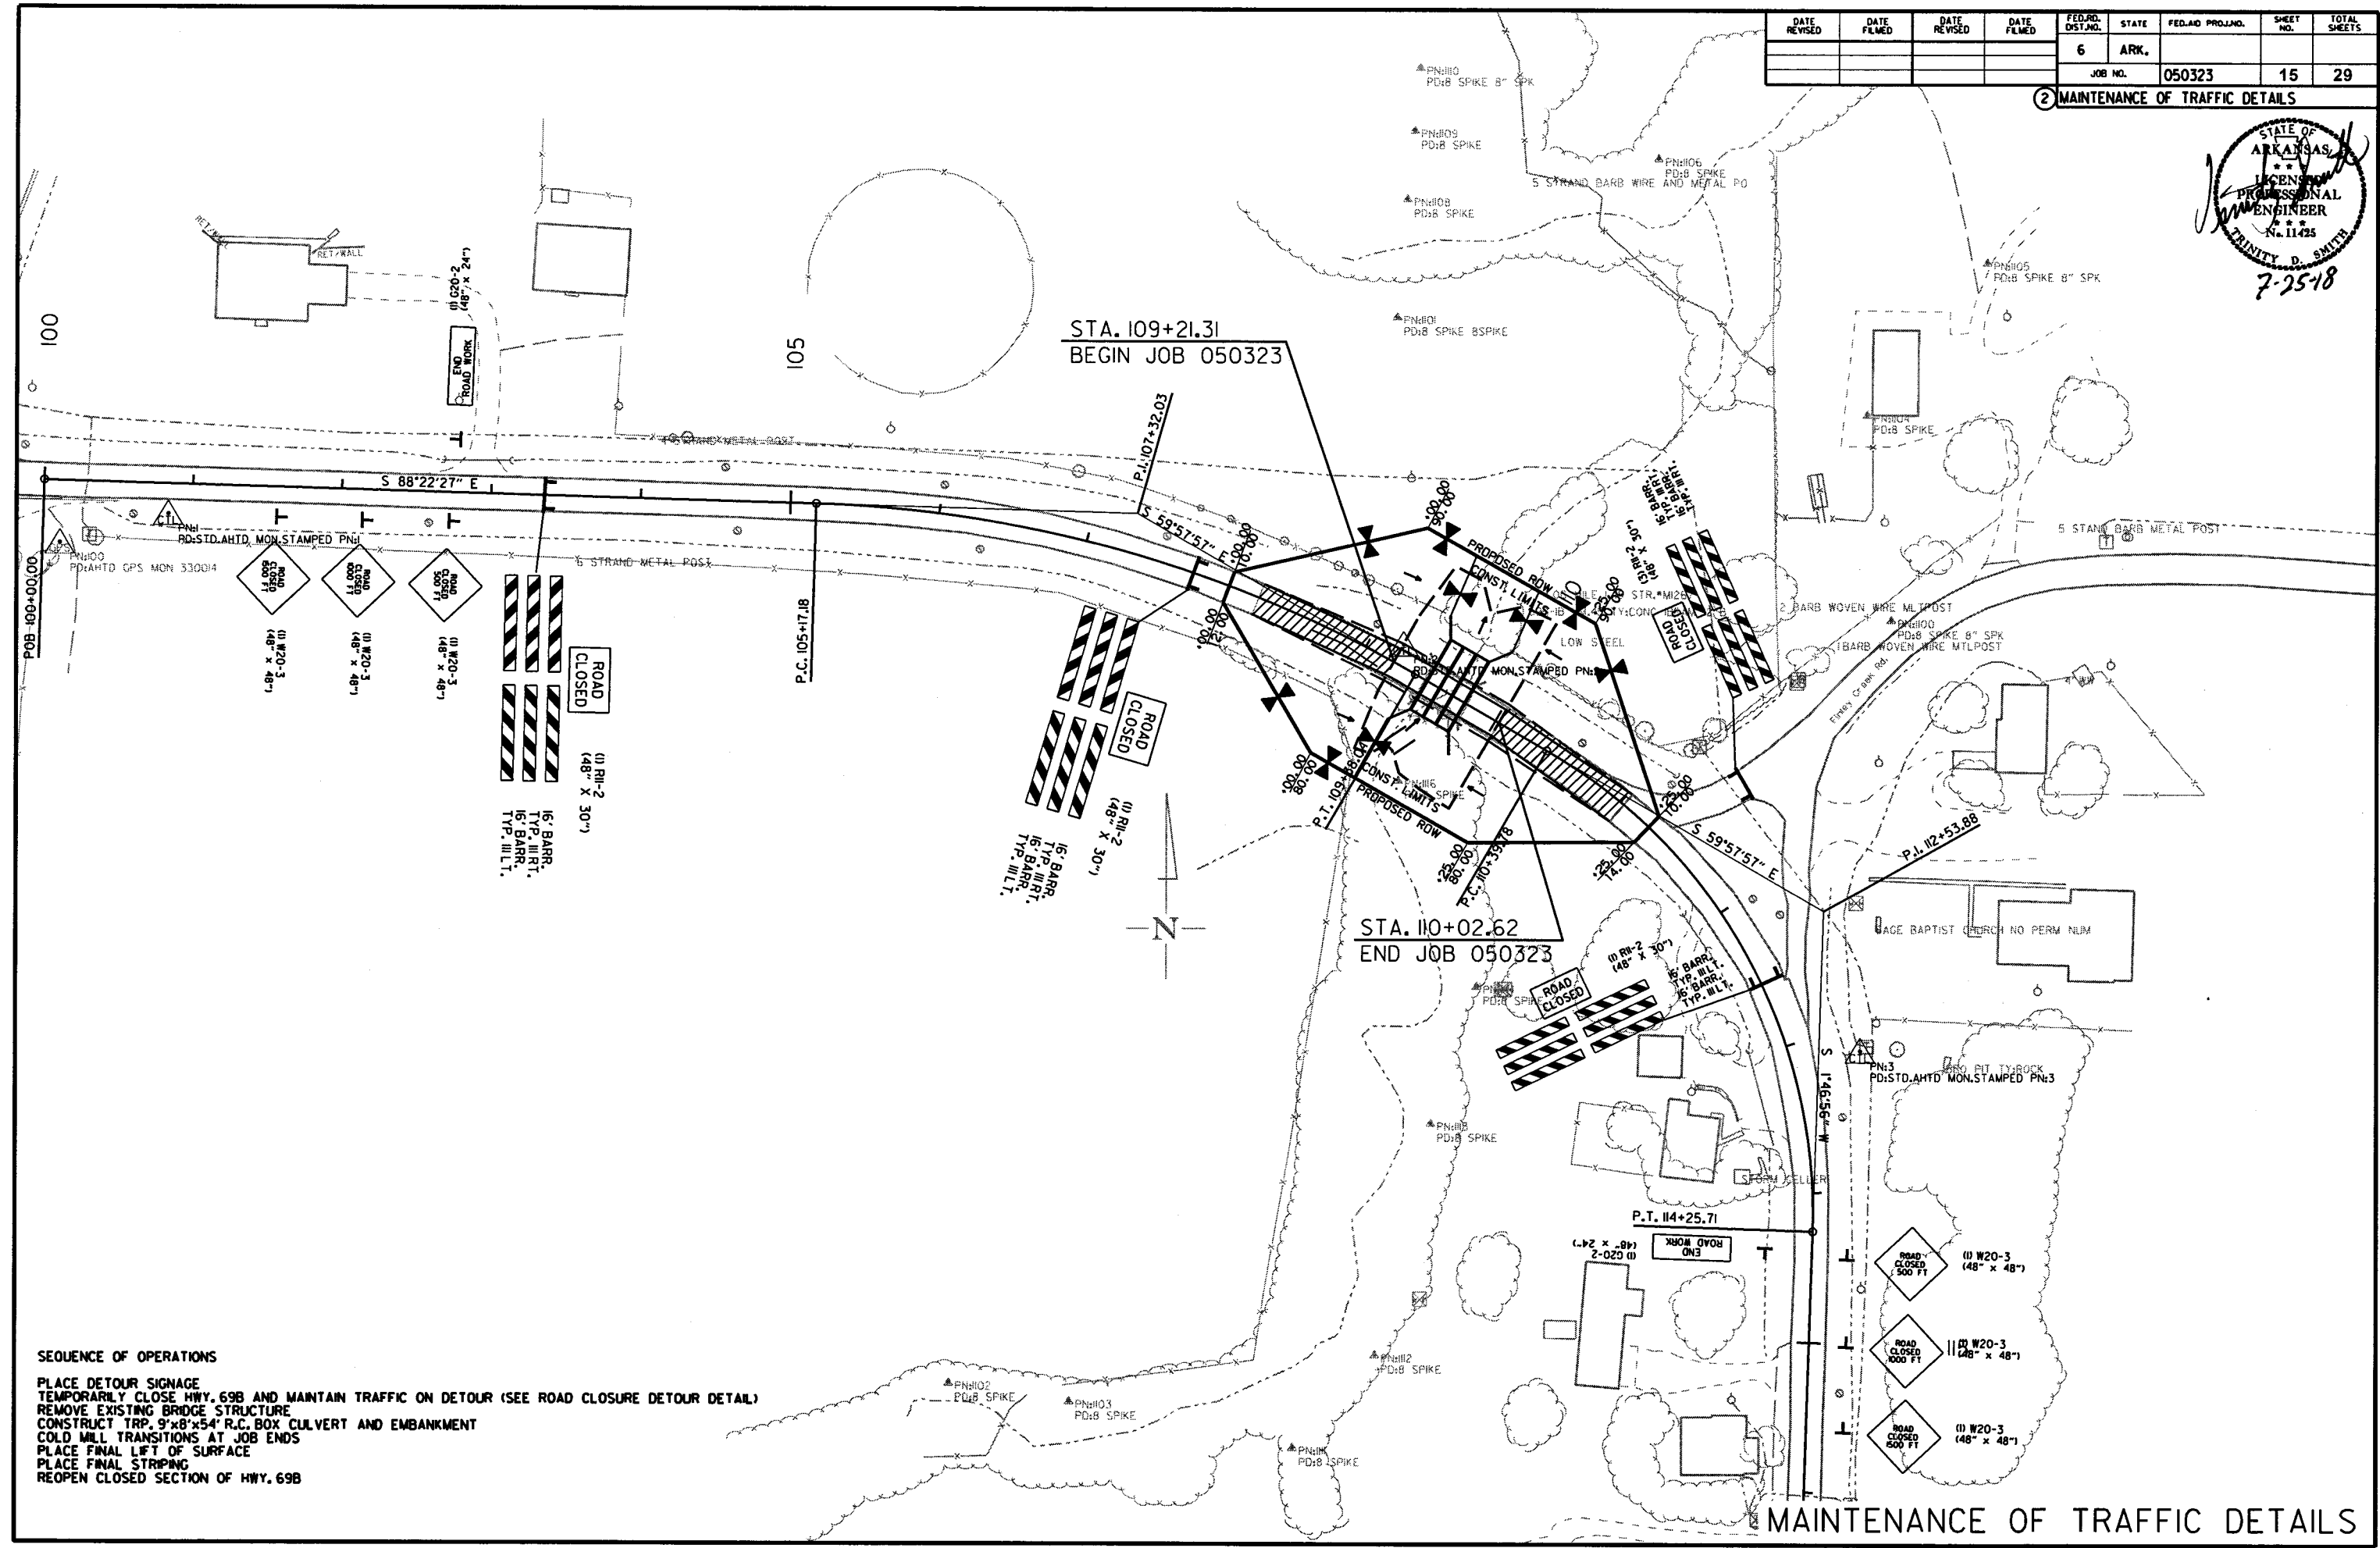

SEQUENCE OF OPERATIONS

- PLACE DETOUR SIGNAGE
- TEMPORARILY CLOSE HWY. 69B AND MAINTAIN TRAFFIC ON DETOUR (SEE ROAD CLOSURE DETOUR DETAIL)
- REMOVE EXISTING BRIDGE STRUCTURE
- CONSTRUCT TRP. 9'x8'x54' R.C. BOX CULVERT AND EMBANKMENT
- COLD MILL TRANSITIONS AT JOB ENDS
- PLACE FINAL LIFT OF SURFACE
- PLACE FINAL STRIPING
- REOPEN CLOSED SECTION OF HWY. 69B



07/19/2018

R050323.DGN

MAINTENANCE OF TRAFFIC DETAILS

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. AID DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
JOB NO. 050323							16	29

② PERMANENT PAVEMENT MARKING DETAILS



• NOTE
 THE 6" YELLOW STRIPING QUANTITY HAS BEEN ESTIMATED BASED ON A DOUBLE YELLOW CENTERLINE STRIPE FOR THE ENTIRE PROJECT. THE PROJECT MUST BE MARKED FOR PASSING/NO PASSING ZONES PRIOR TO THE PLACEMENT OF ANY FINAL STRIPING. CONTACT THE MAINTENANCE DIVISION AFTER THE FINAL LIFT OF SURFACE COURSE HAS BEEN PLACED TO SCHEDULE THE ZONING OF THE PROJECT.

FINAL STRIPING:

REFLECTORIZED PAINT PAVEMENT MARKINGS:
 RT. AND LT. EDGE LINES = 564 LIN. FT. 6" WHITE
 • DBL. CENTERLINE = 564 LIN. FT. 6" YELLOW


RAISED PAVEMENT MARKERS 80' O.C.
 • TYPE II (YEL/YEL) ON DBL YELLOW LINES = 3 EACH

07/03/2018

R050323.DGN

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO. 050323	17	29

② QUANTITIES



ADVANCE WARNING SIGNS AND DEVICES

SIGN NUMBER	DESCRIPTION	SIGN SIZE	END OF JOB LIN. FT. - EACH	MAXIMUM NUMBER REQUIRED	TOTAL SIGNS REQUIRED		BARRICADES (TYPE III)	
					NO.	SQ. FT.	RIGHT	LEFT
							LIN. FT.	
G20-2	END ROAD WORK	48"x24"	2	2	2	16.0		
W20-3	ROAD CLOSED 500 FT.	48"x48"	2	2	2	32.0		
W20-3	ROAD CLOSED 1000 FT.	48"x48"	2	2	2	32.0		
W20-3	ROAD CLOSED 1500 FT.	48"x48"	2	2	2	32.0		
R11-2	ROAD CLOSED	48"x30"	4	4	4	40.0		
R11-3A	ROAD CLOSED XX MILES AHEAD LOCAL TRAFFIC ONLY	60"x30"	2	2	2	25.0		
D3-1	CO. RD. 29	36"x12"	2	2	2	6.0		
D3-1	HWY. 289	36"x12"	2	2	2	6.0		
D3-1	CO. RD. 47	36"x12"	2	2	2	6.0		
D3-1	CO. RD. 72	36"x12"	2	2	2	6.0		
M4-8	DETOUR	24"x12"	4	4	4	8.0		
M6-1	HORIZONTAL ARROW	21"x15"	2	2	2	4.4		
M6-3	VERTICAL ARROW	21"x15"	2	2	2	4.4		
	TYPE III BARRICADE-RT. (16')		4	4			64	
	TYPE III BARRICADE-LT. (16')		4	4				64
TOTALS:						217.8	64	64

NOTE: THIS IS A LOW TRAFFIC VOLUME ROAD AS DEFINED IN SECTION 604.03, STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

PERMANENT PAVEMENT MARKINGS

DESCRIPTION	END OF JOB LIN. FT. - EACH	RAISED PAVEMENT MARKERS	REFLECTORIZED PAINT PAVEMENT MARKING	
		TYPE II (YEL/YEL) EACH	6" WHITE YELLOW LIN. FT.	
RAISED PAVEMENT MARKERS TYPE II (YEL/YEL)	3	3		
REFLECTORIZED PAINT PAVEMENT MARKING WHITE (6")	564		564	
REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (6")	564			564
TOTALS:		3	564	564

NOTE: THIS IS A LOW TRAFFIC VOLUME ROAD AS DEFINED IN SECTION 604.03, STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.

NOTE: THE 6" YELLOW STRIPING QUANTITY HAS BEEN ESTIMATED BASED ON A DOUBLE YELLOW CENTERLINE STRIPE FOR THE ENTIRE PROJECT. THE PROJECT MUST BE MARKED FOR PASSING/NO PASSING ZONES PRIOR TO THE PLACEMENT OF ANY FINAL STRIPING. CONTACT THE MAINTENANCE DIVISION AFTER THE FINAL LIFT OF SURFACE COURSE HAS BEEN PLACED TO SCHEDULE THE ZONING OF THE PROJECT.


07/03/2018

R050323.DGN

QUANTITIES

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.	050323		18	29

② QUANTITIES



CLEARING AND GRUBBING

STATION	STATION	LOCATION	CLEARING	GRUBBING
109+21	110+03	MAIN LANES	2	2
TOTALS:			2	2

REMOVAL AND DISPOSAL OF FENCE

STATION	STATION	LOCATION	FENCE
			LIN. FT.
108+35	109+34	RIGHT	104
108+42	109+36	LEFT	98
109+85	110+76	LEFT	96
TOTAL:			298

EARTHWORK

STATION	STATION	LOCATION / DESCRIPTION	UNCLASSIFIED EXCAVATION CU. YD.	COMPACTED EMBANKMENT	* SOIL STABILIZATION TON
ENTIRE	PROJECT	MAIN LANES	532.00	844	
109+61.69		CHANNEL CHANGE	13.24		
* ENTIRE	PROJECT	TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER			50
TOTALS:			545.24	844	50

* QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.

NOTE: EARTHWORK QUANTITIES SHOWN ABOVE SHALL BE PAID AS PLAN QUANTITY.

COLD MILLING ASPHALT PAVEMENT

STATION	STATION	LOCATION	AVG. WIDTH	COLD MILLING ASPHALT PAVEMENT
			FEET	SQ. YD.
* ENTIRE	PROJECT	TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	VAR.	466.66
TOTAL:				466.66

* QUANTITY ESTIMATED.

ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC

LOCATION	TON	TACK COAT GALLON
ENTIRE PROJECT - TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	5	10
TOTALS:	5	10

BASIS OF ESTIMATE:
ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC...25 TON/MILE
TACK COAT FOR MAINTENANCE OF TRAFFIC.....50 GAL./MILE

NOTE: QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.

ACHM PATCHING OF EXISTING ROADWAY

DESCRIPTION	TON
ENTIRE PROJECT - TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	50
TOTAL:	50

NOTE: QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.

4" PIPE UNDERDRAIN

STATION	STATION	LOCATIONS	4" PIPE UNDERDRAINS	UNDERDRAIN OUTLET PROTECTORS
			LIN. FT.	EACH
* ENTIRE	PROJECT	TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER	100	1
TOTALS:			100	1

* NOTE: QUANTITY ESTIMATED.
SEE SECTION 104.03 OF THE STD. SPECS.

UNDERDRAINS SHALL BE STUBBED INTO THE PROPOSED DROP INLET IF AND WHERE DIRECTED BY THE ENGINEER. PAYMENT FOR THIS TO BE INCLUDED IN THE UNIT PRICE BID FOR 4" PIPE UNDERDRAIN.

FENCING

STATION	STATION	LOCATION	WIRE FENCE			* 16'-0" GATES
			(TYPE C)	(TYPE D-1)	(TYPE D-2)	
			LIN. FT.			EACH
108+35	109+32	RIGHT			148	
108+42	109+39	LEFT		166		
109+87	110+76	LEFT	157			1
TOTALS:			157	166	148	1

* DENOTES ALTERNATE BID ITEM.


07/03/2018

R050323.DGN

QUANTITIES

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.		19	29
				JOB NO.		050323		

② QUANTITIES



EROSION CONTROL

STATION	STATION	LOCATION	PERMANENT EROSION CONTROL					TEMPORARY EROSION CONTROL								*SEDIMENT REMOVAL & DISPOSAL
			SEEDING	LIME	MULCH COVER	WATER	SECOND SEEDING APPLICATION	TEMPORARY SEEDING	MULCH COVER	WATER	WATTLE (20") DITCH CHECKS	TRIANGULAR SILT DIKE	ROCK DITCH CHECKS	FILTER SOCKS (18")	SILT FENCE	
			ACRE	TON	ACRE	M.GAL.	ACRE	ACRE	ACRE	M.GAL.	(E-1) LIN. FT.	(E-) LIN. FT.	(E-6) CU. YD.	(E-) LIN. FT.	(E-11) LIN. FT.	
ENTIRE PROJECT		MAIN LANES	0.25	0.50	0.25	25.5	0.25	0.33	0.33	6.7			12		432	20
*ENTIRE PROJECT TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER.			0.07	0.14	0.07	7.1	0.07	0.08	0.08	1.6	18	20	6	20	108	48
TOTALS:			0.32	0.64	0.32	32.6	0.32	0.41	0.41	8.3	18	20	18	20	540	68

BASIS OF ESTIMATE:
 LIME2 TONS / ACRE OF SEEDING
 WATER102.0 M.G. / ACRE OF SEEDING
 WATER20.4 M.G. / ACRE OF TEMPORARY SEEDING
 WATER12.6 GAL. / SQ. YD. OF SOLID SODDING
 WATTLE DITCH CHECKS9 LIN. FT. / LOCATION
 ROCK DITCH CHECKS3 CU. YD. / LOCATION

NOTE: THE TEMPORARY EROSION CONTROL DEVICES SHOWN ABOVE AND ON THE PLANS SHALL BE INSTALLED IN SUCH A SEQUENCE AS TO DETER EROSION AND SEDIMENTATION ON U.S. WATERWAYS AS EXPLAINED BY THE NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT.

*QUANTITIES ESTIMATED.
 SEE SECTION 104.03 OF THE STD. SPECS.

EROSION CONTROL MATTING

STATION	STATION	LOCATION	LENGTH	CLASS 3
			LIN. FT.	SQ. YD.
ENTIRE PROJECT - TO BE USED IF AND WHERE DIRECTED BY THE ENGINEER			100.00	88.89
TOTAL:				88.89

NOTE: AVERAGE WIDTH = 8'-0"
 NOTE: QUANTITIES ESTIMATED.
 SEE SECTION 104.03 OF THE STD. SPECS.

BENCH MARKS

STATION	LOCATION	BENCH MARKS
		EACH
109+62	LT. HEADWALL	1
TOTAL:		1

NOTE: SHOWN FOR INFORMATION ONLY. BENCH MARKS SHALL BE FURNISHED AND PLACED BY STATE FORCES.


07/03/2018

R050323.DCN

QUANTITIES

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. DIST. NO.	STATE	FED. PROJ. NO.	SHEET NO.	TOTAL SHEETS	
				6	ARK.				
JOB NO.							050323	20	29

② QUANTITIES



SOIL LOG

STATION	LATITUDE			LONGITUDE			LOCATION	DEPTH FEET	LIQUID LIMIT	PLASTICITY INDEX	AASHTO CLASSIFICATION	COLOR
	DEG	MIN	SEC	DEG	MIN	SEC						
106+00	36	2	46.20	91	49	1.70	6' RT	0-5	20	10	A-2-4(0)	BROWN
106+00	36	2	46.40	91	49	1.60	18' RT	0-5	33	22	A-6(5)	BROWN
106+00	36	2	46.40	91	49	1.60	18' RT	0-5	25	13	A-2-6(0)	BROWN
112+00	36	2	43.80	91	48	55.20	7' LT	0-4.5Z	27	13	A-6(1)	BROWN
112+00	36	2	43.80	91	48	55.20	18' LT	0-5	24	13	A-6(1)	BROWN

SOIL CHARACTERISTICS TABULATED ABOVE ARE REPRESENTATIVE AT THE LOCATION OF THE SAMPLE, AND FROM SURFACE INDICATIONS ARE TYPICAL FOR THE LIMITS SHOWN. THESE DATA ARE SHOWN FOR INFORMATION ONLY. THE STATE WILL NOT BE RESPONSIBLE FOR VARIATIONS IN THE SOIL CHARACTERISTICS AND/OR EXTENT OF SAME DIFFERING FROM THE ABOVE TABULATIONS.
 Z- AUGER REFUSAL
 NP - NON-PLASTIC
 ND - NOT DETERMINABLE

REMOVAL OF EXISTING BRIDGE STRUCTURE (SITE NO. 1)

STATION	STATION	LOCATION	LUMP SUM
109+45	109+78	25'-6" x 34'-0" CONCRETE DECK AND CONCRETE PIERS WITH STEEL GIRDERS (SITE NO. 1)	1.00

STRUCTURES

STATION	DESCRIPTION	SPAN	HEIGHT	LENGTH	CLASS 5 CONCRETE-ROADWAY	REINF. STEEL-ROADWAY (GRADE 60)	UNCL. EXC. FOR STR.-ROADWAY	SOLID SODDING	WATER	STD. DWG. NOS.
					CU. YD.	POUND				
STRUCTURES OVER 20' - 0" SPAN										
109+62	TRP. 9'x8'x54' R.C. BOX CULVERT	9	8	54	189.62	22859	92	31	0.39	PBC-1, RCB-1, RCB-2, SPECIAL DETAILS
TOTALS:					189.62	22859	92	31	0.39	

BASIS OF ESTIMATE:
 WATER.....12.6 GAL. / SQ. YD. OF SOLID SODDING

BASE AND SURFACING

STATION	STATION	LOCATION	LENGTH FEET	AGGREGATE BASE COURSE (CLASS 7)		TACK COAT			ACHM BINDER COURSE (1")			ACHM SURFACE COURSE (1/2")					
				TON / STATION	TON	AVG. WID.	SQ. YD.	GALLONS / SQ. YD.	GALLON	AVG. WID.	SQ. YD.	POUND / SQ. YD.	PG 64-22	AVG. WID.	SQ. YD.	POUND / SQ. YD.	PG 64-22
						FEET			FEET		TON	FEET		TON	FEET		TON
MAIN LANES																	
108+21.31	109+21.31	TRANSITION	100.00	VAR.	116.67									20.00	222.22	220.00	24.44
109+21.31	110+02.62	FULL DEPTH	81.31	83.00	67.23	40.58	366.62	0.05	18.33	20.58	185.93	1100.00	102.26	24.00	216.83	220.00	23.85
110+02.62	111+02.62	TRANSITION	100.00	VAR.	116.67									VAR.	244.44	220.00	26.89
ADDITIONAL FOR SUPERELEVATION																	
109+21.31	110+02.62		81.31	VAR.	11.14												
TOTALS:					311.71		366.62		18.33		185.93		102.26		683.49		75.18

BASIS OF ESTIMATE:
 ACHM SURFACE COURSE (1/2").....94.7% MIN. AGGR.....5.3% ASPHALT BINDER
 ACHM BINDER COURSE (1").....95.6% MIN. AGGR.....4.4% ASPHALT BINDER
 MAXIMUM NUMBER OF GYRATIONS = 115 FOR PG 64-22
 TACK COAT QUANTITIES WERE CALCULATED USING THE EMULSIFIED ASPHALT RATES. REFER TO SS-400-1 FOR THE RESIDUAL ASPHALT APPLICATION RATES.

07/03/2018

R050323.DCN

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
08-28-18				6	ARK.			
JOB NO.						050323	21	29

2 SUMMARY OF QUANTITIES AND REVISIONS



SUMMARY OF QUANTITIES

ITEM NUMBER	ITEM	QUANTITY	UNIT
201	CLEARING	2	STATION
201	GRUBBING	2	STATION
202	REMOVAL AND DISPOSAL OF FENCE	298	LIN. FT.
210	UNCLASSIFIED EXCAVATION	545	CU. YD.
210	COMPACTED EMBANKMENT	844	CU. YD.
SP & 210	SOIL STABILIZATION	50	TON
SS & 303	AGGREGATE BASE COURSE (CLASS 7)	312	TON
SS & 401	TACK COAT	28	GAL.
SP, SS, & 406	MINERAL AGGREGATE IN ACHM BINDER COURSE (1")	98	TON
SP, SS, & 406	ASPHALT BINDER (PG 64-22) IN ACHM BINDER COURSE (1")	4	TON
SP, SS, & 407	MINERAL AGGREGATE IN ACHM SURFACE COURSE (1/2")	71	TON
SP, SS, & 407	ASPHALT BINDER (PG 64-22) IN ACHM SURFACE COURSE (1/2")	4	TON
412	COLD MILLING ASPHALT PAVEMENT	467	SQ. YD.
SP, SS, & 414	ASPHALT CONCRETE PATCHING FOR MAINTENANCE OF TRAFFIC	5	TON
SP, SS, & 415	ACHM PATCHING OF EXISTING ROADWAY	50	TON
601	MOBILIZATION	1.00	LUMP SUM
SP & 602	FURNISHING FIELD OFFICE	1	EACH
SP & 603	MAINTENANCE OF TRAFFIC	1.00	LUMP SUM
SS & 604	SIGNS	218	SQ. FT.
SS & 604	BARRICADES	128	LIN. FT.
611	UNDERDRAIN OUTLET PROTECTORS	1	EACH
611	4" PIPE UNDERDRAINS	100	LIN. FT.
619	WIRE FENCE (TYPE C)	157	LIN. FT.
619	WIRE FENCE (TYPE D-1)	166	LIN. FT.
619	WIRE FENCE (TYPE D-2)	148	LIN. FT.
619	18' STEEL GATES (ALTERNATE NO. 1)	1	EACH
619	18' ALUMINUM GATES (ALTERNATE NO. 2)	1	EACH
620	LIME	1	TON
620	SEEDING	0.32	ACRE
SS & 620	MULCH COVER	0.73	ACRE
620	WATER	41.3	M. GAL.
621	TEMPORARY SEEDING	0.41	ACRE
621	SILT FENCE	540	LIN. FT.
621	SEDIMENT REMOVAL AND DISPOSAL	68	CU. YD.
621	ROCK DITCH CHECKS	18	CU. YD.
SS & 621	FILTER SOCK (18")	20	LIN. FT.
621	WATTLE (20")	18	LIN. FT.
621	TRIANGULAR SILT DIKE	20	LIN. FT.
623	SECOND SEEDING APPLICATION	0.32	ACRE
624	SOLID SODDING	31	SQ. YD.
626	EROSION CONTROL MATTING (CLASS 3)	89	SQ. YD.
635	ROADWAY CONSTRUCTION CONTROL	1.00	LUMP SUM
718	REFLECTORIZED PAINT PAVEMENT MARKING WHITE (6")	564	LIN. FT.
718	REFLECTORIZED PAINT PAVEMENT MARKING YELLOW (6")	564	LIN. FT.
721	RAISED PAVEMENT MARKERS (TYPE II)	3	EACH
STRUCTURES OVER 20' SPAN			
205	REMOVAL OF EXISTING BRIDGE STRUCTURE (SITE NO. 1)	1.00	LUMP SUM
801	UNCLASSIFIED EXCAVATION FOR STRUCTURES-ROADWAY	92	CU. YD.
802	CLASS S CONCRETE-ROADWAY	189.62	CU. YD.
804	REINFORCING STEEL-ROADWAY (GRADE 60)	22859	POUND

* DENOTES ALTERNATE BID ITEMS.


REVISIONS

DATE	REVISION	SHEET NUMBER
08/28/2018	ADDED "WELLHEAD PROTECTION" SPECIAL PROVISION	3, 21

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. PROJ. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.	050323		22	29

APPROX. MID POINT
LAT N 36-02-43
LON W091-48-54

2 SURVEY CONTROL DETAILS



SURVEY CONTROL COORDINATES

Project Name: s050323
Date: 8/30/2016
Coordinate System: ARKANSAS STATE PLANE - NORTH ZONE BASED ON GPS CONTROL,
PROJECTED TO GROUND.
Units: U.S. SURVEY FOOT

Point Name	Northing	Easting	Elev	Feature	Description
1	623548.3020	1365963.6689	701.25	CTL	STD. AHTD MON. STAMPED PN: 1
2	623462.5355	1366790.3214	685.15	CTL	STD. AHTD MON. STAMPED PN: 2
3	623190.8226	1367096.1684	697.39	CTL	STD. AHTD MON. STAMPED PN: 3
4	622828.7296	1367087.2559	714.46	CTL	STD. AHTD MON. STAMPED PN: 4
100	623529.0073	1365890.9603	705.14	GPS	AHTD GPS MON 330014
101	625113.6856	1365847.3016	720.99	GPS	AHTD GPS MON 330014A

EXISTING C.L.

POINT NO.	TYPE	STATION	NORTHING	EASTING
8000	POB	100+00.00	623570.8610	1365880.4172
8001	PC	105+17.18	623556.1881	1366397.3865
8003	PT	109+38.04	623442.5551	1366798.1563
8004	PC	110+39.78	623391.6317	1366886.2368
8006	PT	114+25.71	623070.4793	1367064.9278
8007	POE	120+37.29	622459.1959	1367045.9078

*Note - Rebar and Cap - Standard - 5/8" Rebar with 2" Aluminum Cap stamped
*(standard markings common to all caps), or as indicated
(other markings indicated in the point description of the individual point).
ALL DISTANCES ARE GROUND.
USE CAF = 1.0 FOR STAKEOUT FOR THIS PROJECT.
A PROJECT CAF OF 0.99993768 HAS BEEN USED TO COMPUTE THE ABOVE GROUND COORDINATES.
THIS CAF IS INTENDED FOR USE WITHIN THE PROJECT LIMITS.
GRID DISTANCE = GROUND DISTANCE X CAF.
GRID COORDINATES ARE STORED UNDER FILE NAME s050323gi.ctl
HORIZONTAL DATUM: NAD 83 (1997)
VERTICAL DATUM: NAVD 88 POSITIONAL ACCURACY THIRD ORDER, UNLESS SPECIFIED OTHERWISE
AT A SPECIFIC POINT.

REFERENCE POINTS (1500 SERIES) ARE TO BE USED TO ESTABLISH CONTROL
IF THE PRIMARY CONTROL POINTS LISTED ABOVE HAVE BEEN DESTROYED.
REFERENCE POINTS ARE NOT TO BE USED FOR VERTICAL CONTROL



BASIS OF BEARING:
ARKANSAS STATE PLANE GRID BEARINGS - 0301-NORTH ZONE
DETERMINED FROM GPS CONTROL POINTS: 880088-880088A
CONVERGENCE ANGLE: 0-99-99.9 LEFT/RIGHT AT LAT: N 36-02-43 LON: W091-48-54
GRID AZIMUTH = ASTRONOMICAL AZIMUTH - CONVERGENCE ANGLE.

07/03/2018

R050323.DGN

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
JOB NO. 050323							23	29

2 SURVEY CONTROL DETAILS


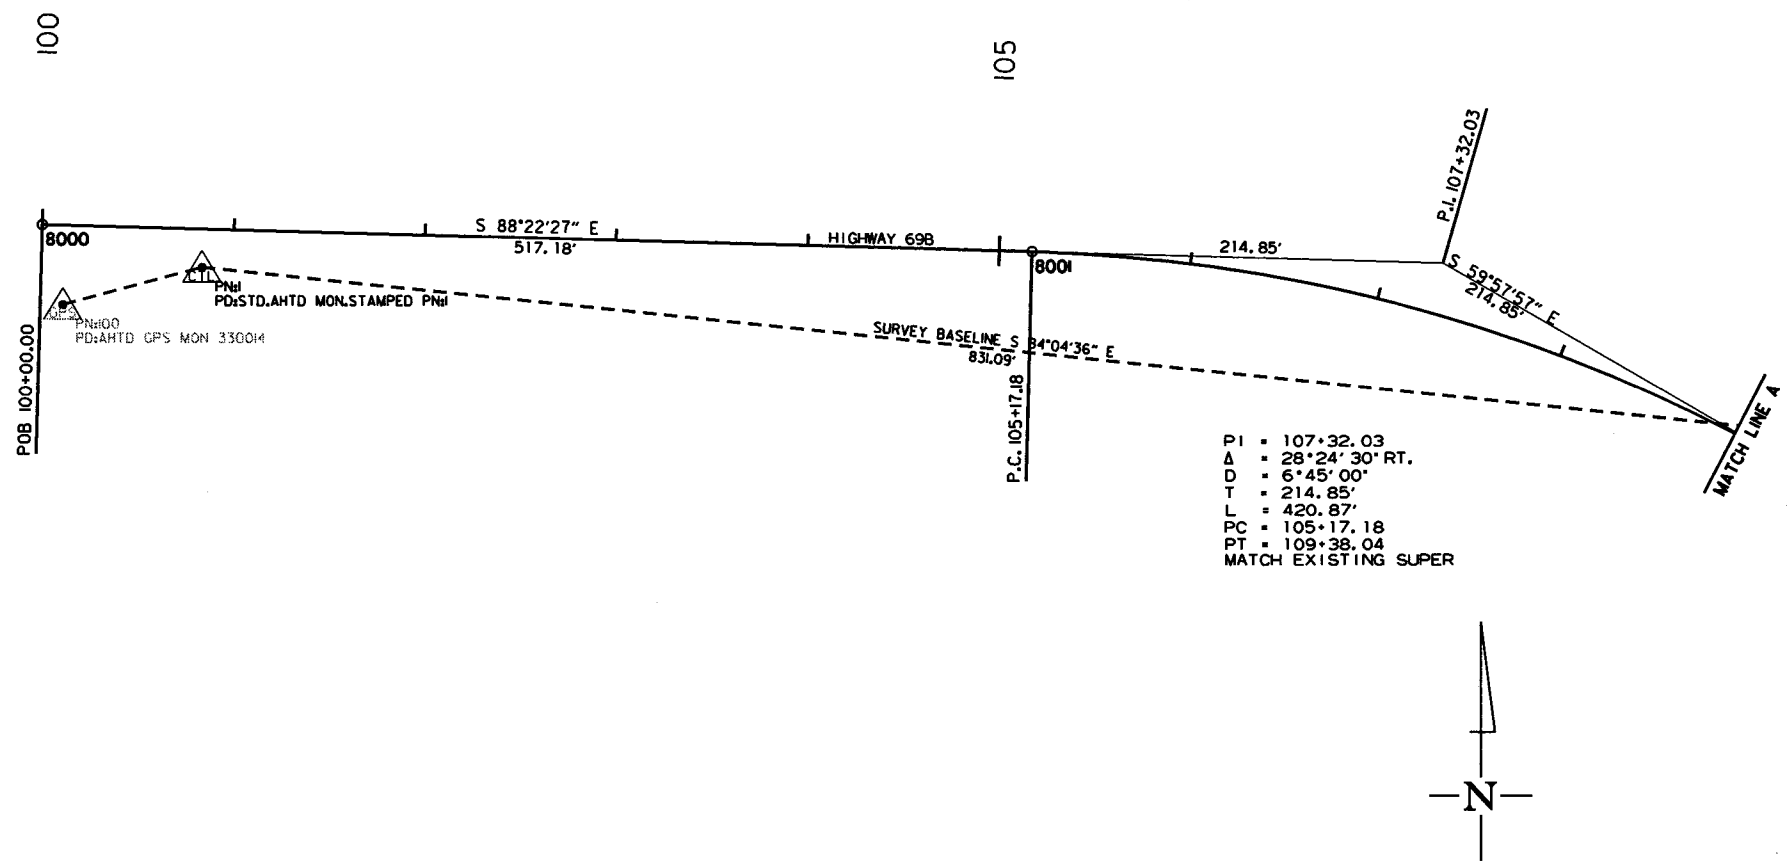



07/03/2018

R050323.DGN

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
JOB NO. 050323							24	29

2 SURVEY CONTROL DETAILS

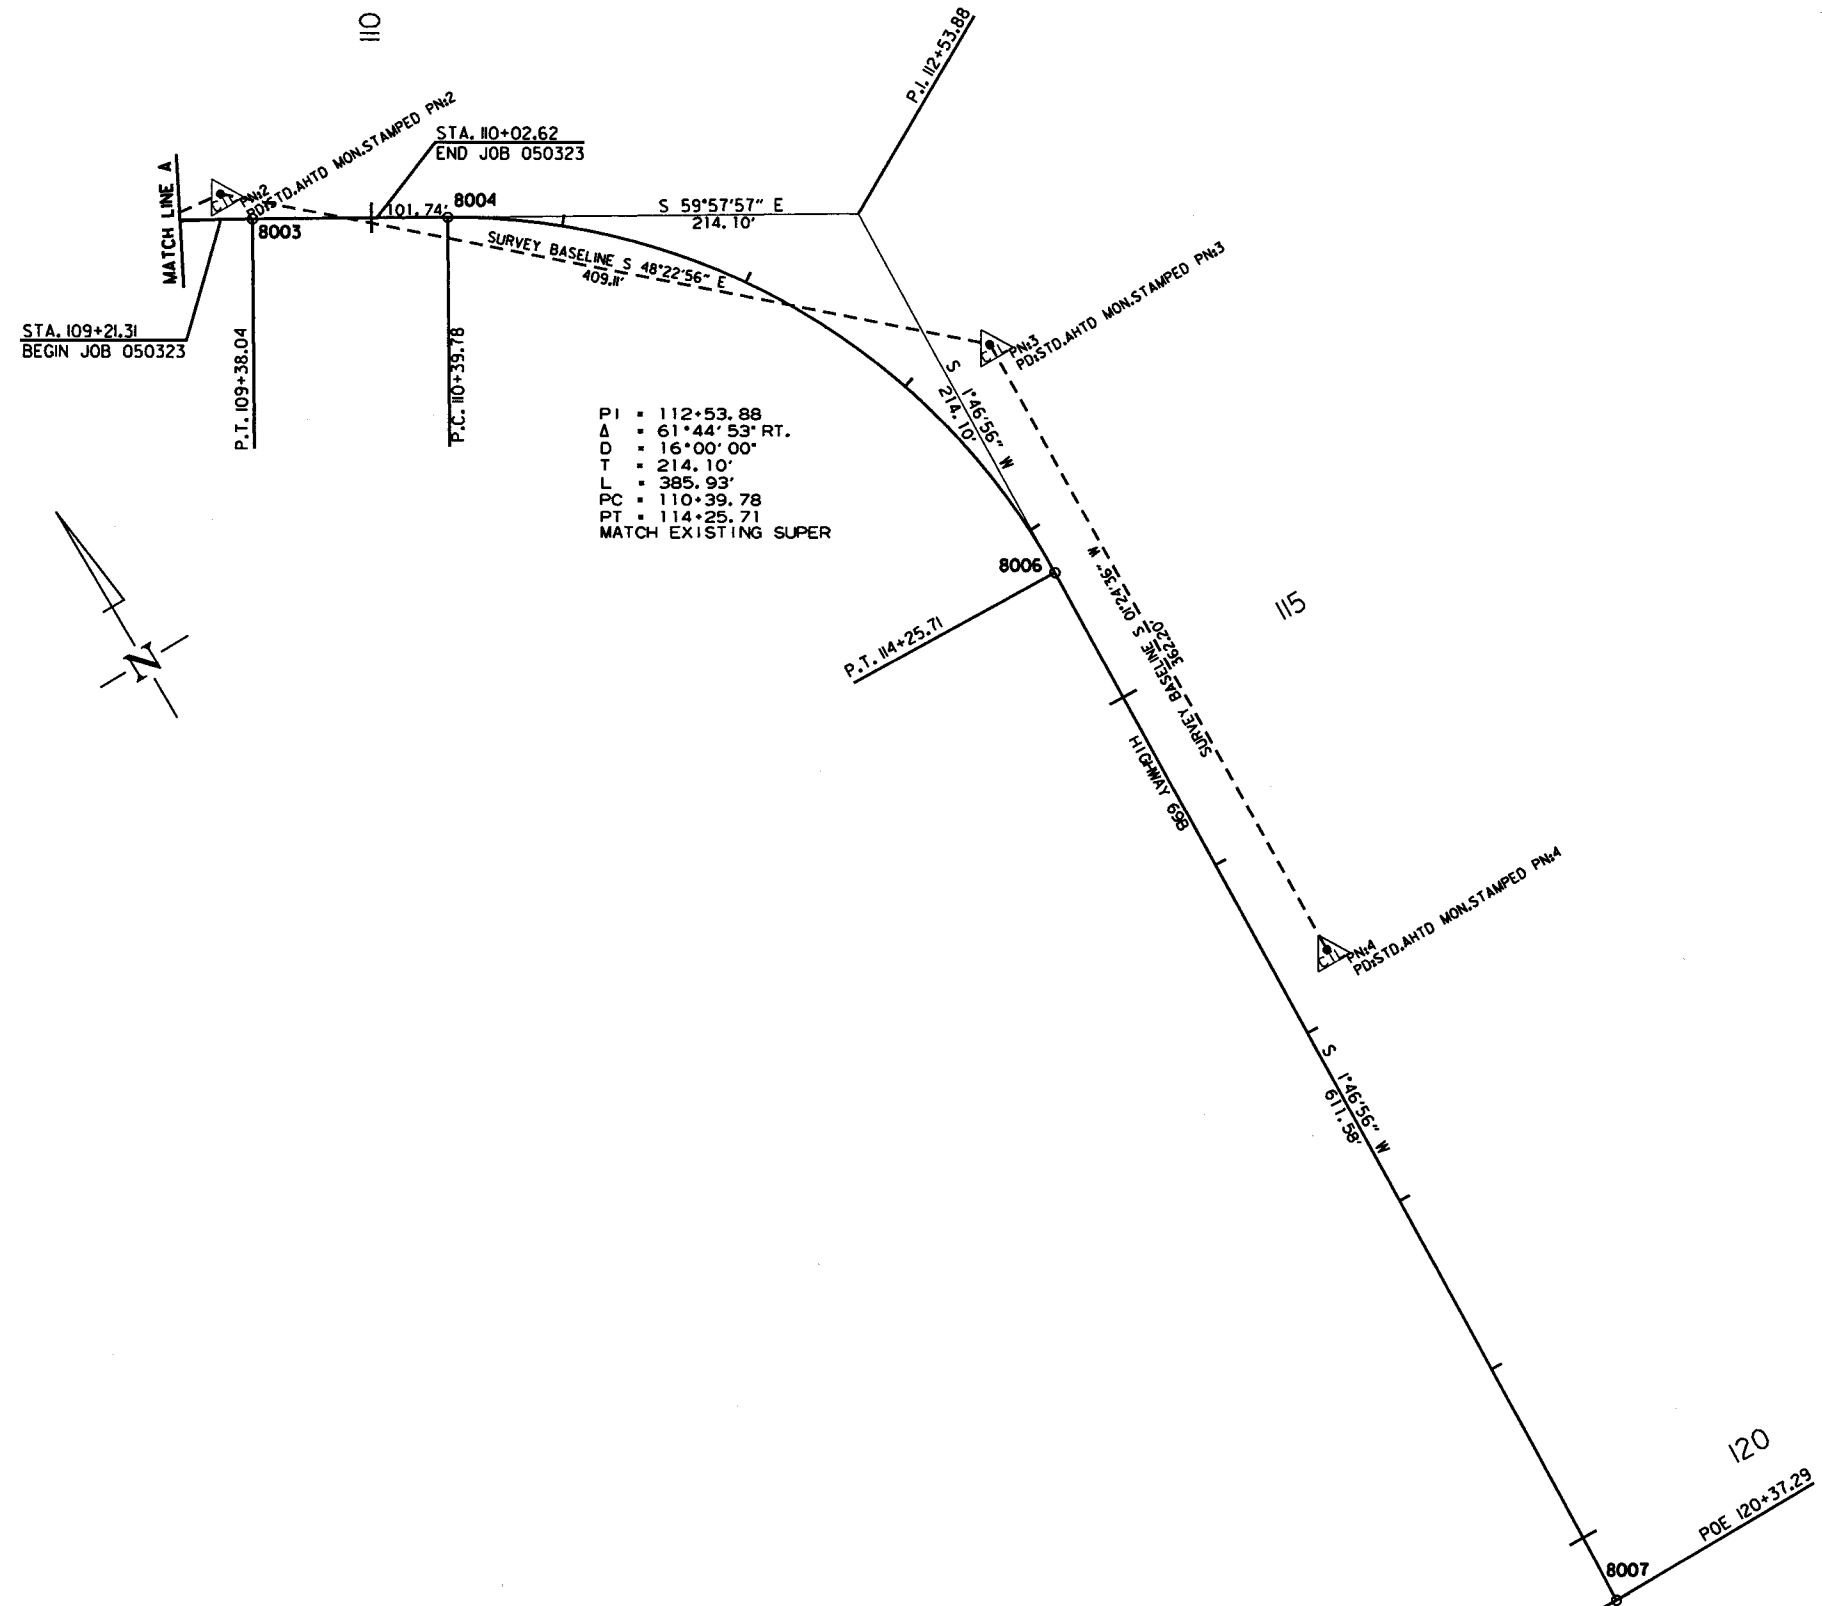



SURVEY CONTROL DETAILS

07/03/2018

R050323.DGN

DATE REVISED	DATE FILED	DATE REVISED	DATE FILED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.		25	29

2 PLAN AND PROFILE SHEETS

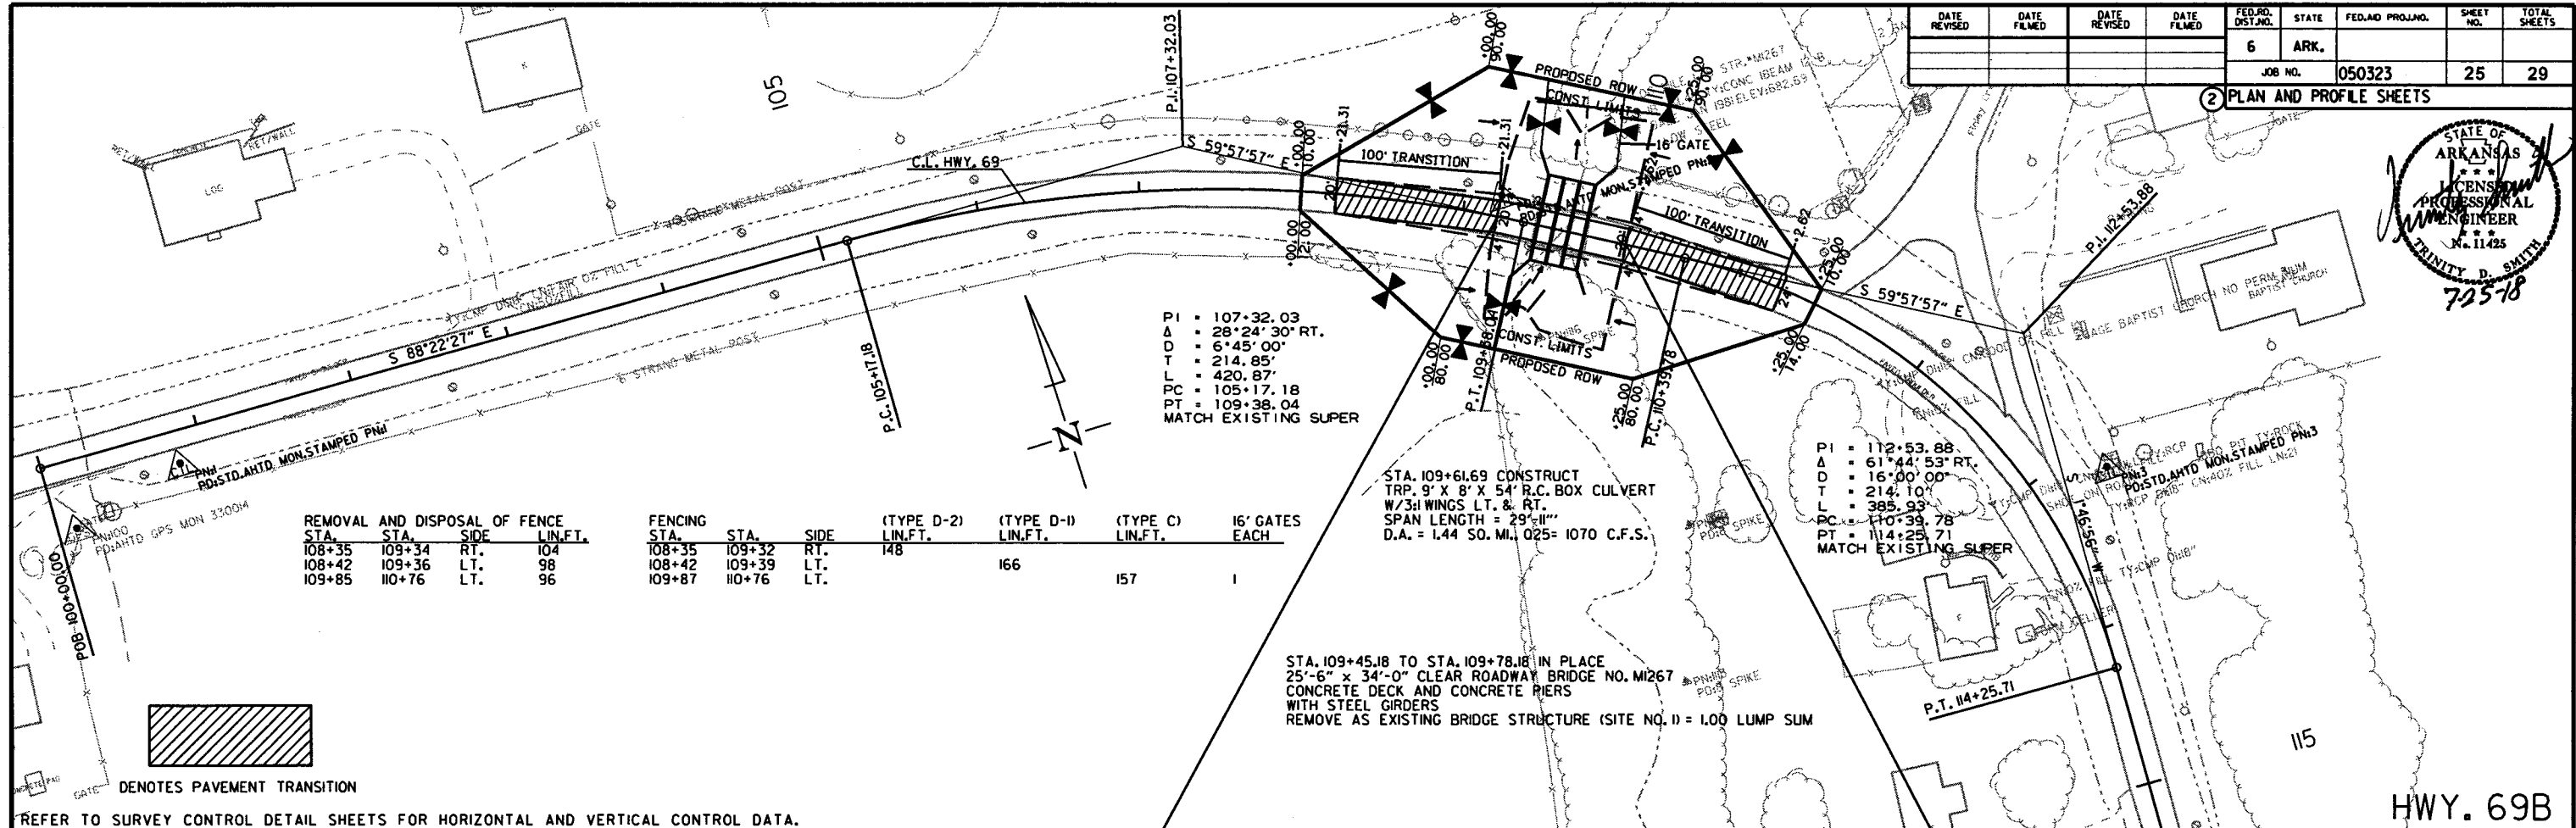

PI = 107+32.03
 Δ = 28°24'30" RT.
 D = 6°45'00"
 T = 214.85'
 L = 420.87'
 PC = 105+17.18
 PT = 109+38.04
 MATCH EXISTING SUPER

PI = 112+53.88
 Δ = 61°44'53" RT.
 D = 16°00'00"
 T = 214.10'
 L = 385.93'
 PC = 110+39.78
 PT = 114+25.71
 MATCH EXISTING SUPER

REMOVAL AND DISPOSAL OF FENCE				FENCING				(TYPE D-2)				(TYPE D-1)				(TYPE C)				16' GATES EACH									
STA.	STA.	SIDE	LIN. FT.	STA.	STA.	SIDE	LIN. FT.	STA.	STA.	SIDE	LIN. FT.	STA.	STA.	SIDE	LIN. FT.	STA.	STA.	SIDE	LIN. FT.	STA.	STA.	SIDE	LIN. FT.	STA.	STA.	SIDE	LIN. FT.		
108+35	109+34	RT.	104	108+35	109+32	RT.	148																						
108+42	109+36	LT.	98	108+42	109+39	LT.	166																						
109+85	110+76	LT.	96	109+87	110+76	LT.	157																						



STA. 109+61.69 CONSTRUCT TRP. 9' X 8' X 54" R.C. BOX CULVERT W/3:1 WINGS LT. & RT. SPAN LENGTH = 29'-11" D.A. = 1.44 SO. M.I. 025= 1070 C.F.S.

STA. 109+45.18 TO STA. 109+78.18 IN PLACE 25'-6" x 34'-0" CLEAR ROADWAY BRIDGE NO. M267 CONCRETE DECK AND CONCRETE PIERS WITH STEEL GIRDERS REMOVE AS EXISTING BRIDGE STRUCTURE (SITE NO. 1) = 1.00 LUMP SUM

CANEY CREEK AT STA. 109+44 TO STA. 109+77 IS CLASSIFIED AS PERENNIAL THE TOP OF CHANNEL ELEVATION IS 679.0 FT. MSL. REFER TO SECTION 10.05(c) TEMPORARY FILL OF THE 2014 STANDARD SPECIFICATIONS.

STA. 109+21.31
 BEGIN JOB 050323
 ELEV. 684.54
 L.M. 1.44


STA. 110+02.62
 END JOB 050323
 ELEV. 684.81



07/19/2018 R050323.DGN

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO. 050323	26	29

② CROSS SECTIONS





07/19/2018

R050323.DGN

STA. 108+21.33 TO STA. 108+21.33

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO. 050323	27	29

2 CROSS SECTIONS



STA. 109+21 TO STA. 109+50


07/19/2018

R050323.DGN


DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO. 050323	28	29

2 CROSS SECTIONS

STA. 110+02.62
END JOB 050323
BEGIN 100' TRANSITION



STA. 109+61.69 CONSTRUCT
TRP. 9' X 8' X 54" R.C. BOX CULVERT
W/3:1 WINGS LT. & RT.
SPAN LENGTH = 29'-11"
D.A. = 1.44 SQ. MI., Q25 = 1070 C.F.S.




STA. 109+62 TO STA. 110+00

07/19/2018


R050323.DGN

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						JOB NO. 050323	29	29

② CROSS SECTIONS



STA. 111+02.62 TO STA. 111+02.62



BAR LIST				BAR BENDING DIAGRAM	
BAR	NO.	SIZE	LENGTH		
H	2	#4	.		
I	.	#4	.		
J	.	#4	1'-5"		
L	.	#4	3'-2"		
M	.	#4	1'-8"		

* NOTE: LENGTH AND NUMBER OF BARS VARIES WITH SIZE OF CULVERT

GENERAL NOTES

WINGS, CURTAIN WALLS AND APRONS SHALL BE TIED TO THE PRECAST CULVERT SECTION BY CASTING BARS IN CULVERT END SECTIONS AS SHOWN OR BY DOWELING AND GROUTING. J BARS AND M BARS SHALL BE EMBEDDED A MINIMUM OF 10" IN PRECAST BOX.

WINGS, FOOTINGS, APRONS AND CURTAIN WALLS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE WING DRAWING. STEEL AND CONCRETE QUANTITIES WILL BE ADJUSTED TO FIT THE IN-PLACE WIDTH & HEIGHT OF THE PRECAST CONCRETE BOX CULVERTS.

ALL EXPOSED CORNERS TO HAVE 3/4" CHAMFERS.

WINGWALLS AND FOOTINGS MAY BE ADJUSTED IN THE FIELD AS DIRECTED BY THE ENGINEER.

ALL CONCRETE, REINFORCING STEEL, LEAN GROUT, MEMBRANE WATERPROOFING, DRAINAGE FILL MATERIAL, GEOTEXTILE FILTER FABRIC, LABOR, MATERIALS AND EQUIPMENT REQUIRED FOR INSTALLING PRECAST BOX CULVERTS WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED TO BE INCLUDED IN THE PRICE BID FOR THE ITEMS AS SPECIFIED IN SECTION 607 OF THE STANDARD SPECIFICATIONS.

LEAN GROUT SHALL CONSIST OF A SAND CEMENT MIXTURE MEETING THE FOLLOWING REQUIREMENTS:
 PORTLAND CEMENT SHALL BE TYPE I AND SHALL MEET THE REQUIREMENTS OF AASHTO M 85.
 SAND SHALL MEET THE REQUIREMENTS OF FINE AGGREGATE AS SPECIFIED IN SECTION 802.02 OF THE STANDARD SPECIFICATIONS. THE SAND CEMENT MIXTURE SHALL CONSIST OF NOT LESS THAN 1.5 SACKS OF PORTLAND CEMENT PER TON OF MATERIAL MIXTURE. THE MIXTURE SHALL CONTAIN SUFFICIENT WATER TO HYDRATE THE CEMENTS. THE SAND CEMENT MIXTURE SHALL BE PLACED IN MAXIMUM 8 INCH THICK LIFTS, LOOSE MEASURE, AND THOROUGHLY RODDED AND TAMPED AROUND BOX TO THOROUGHLY FILL ALL VOIDS.

MEMBRANE WATERPROOFING CONFORMING TO THE REQUIREMENTS OF SECTION 815 OF THE STANDARD SPECIFICATIONS SHALL BE APPLIED TO ALL BOX CULVERT JOINTS.



THE MEMBRANE WATERPROOFING WILL BE REQUIRED ON THE TOP EXTERNAL JOINT AND SHALL EXTEND 1 FOOT DOWN THE SIDES OF THE CULVERT.

IN OUTER BARRELS, ONE WEEP HOLE IS REQUIRED IN EXTERIOR WALLS OF EACH PRECAST CULVERT SECTION. WEEP HOLES SHALL HAVE A MAXIMUM HORIZONTAL SPACING OF 10'-0" IN THE ASSEMBLED CULVERT AND SHALL BE SPACED TO CLEAR ALL REINFORCING STEEL. THE DRAIN OPENING SHALL BE 4" DIAMETER AND SHALL BE PLACED 12" ABOVE THE TOP OF THE BOTTOM SLAB.

DRAINAGE FILL MATERIAL WITH GEOTEXTILE FABRIC IS REQUIRED AT THE EXTERIOR WALLS OF THE ASSEMBLED CULVERT, SEE DETAILS ON THIS DRAWING.


MINIMUM WIDTH SHALL BE 12" (6" ON EACH SIDE OF JOINT). ON MULTIPLE BARREL CULVERTS, MEMBRANE WATERPROOFING SHALL BE APPLIED TO EACH BARREL AS DESCRIBED ABOVE.

WITH THE APPROVAL OF THE ENGINEER, THE CONTRACTOR WILL BE ALLOWED TO SUBSTITUTE, AT NO ADDITIONAL COST TO THE DEPARTMENT, FLOWABLE SELECT MATERIAL CONFORMING TO SECTION 206 OF THE STANDARD SPECIFICATIONS IN LIEU OF LEAN GROUT.




DATE	REVISION	DATE FILED
1-28-85	REVISED GEOTEXTILE FABRIC PLACEMENT	
12-15-81	ADDED NOTE & DTLS FOR WEEP HOLE AND DRAINAGE FILL	
10-15-09	ADDED GENERAL NOTE	
8-10-05	REVISED SPACING OF "M" BARS	
4-10-03	REVISED GENERAL NOTES	
10-18-96	CORRECTED AASHTO REF.	
10-1-92	ADDED NOTE FOR MEMBRANE WATERPROOFING	
8-15-91	ADDED NOTE FOR LEAN GROUT	
11-8-90	REVISED FOR 1991 SPECS	
8-30-89	ISSUED, JABE	

ARKANSAS STATE HIGHWAY COMMISSION
 PRECAST CONCRETE BOX CULVERTS
 STANDARD DRAWING PBC-1




CONCRETE PAVEMENT




ASPHALT PAVEMENT


BROKEN LINE STRIPING




SOLID LINE STRIPING ON CONCRETE PAVEMENT



SOLID LINE STRIPING ON ASPHALT PAVEMENT




ASPHALT PAVEMENT




CONCRETE PAVEMENT

STRIPING AT ADJACENT NO PASSING LANES



YIELD LINE DETAIL




CROSSWALK AND STOPBAR DETAILS

NOTES:

1. REFER TO THE STRIPING DETAILS FOR PAVEMENT MARKING LINE WIDTHS.
2. THIS DRAWING SHALL BE USED IN CONJUNCTION WITH THE LATEST REVISED ADDITION OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES."
3. RAISED PAVEMENT MARKERS SHALL BE PLACED ON AN 80 FEET SPACING UNLESS OTHERWISE SHOWN IN THE PLANS.


2" FOR ASPHALT OR CONCRETE PAVEMENT
6" FOR BITUMINOUS SURFACE TREATMENT



PAVEMENT EDGE LINE MARKING


NOTE:
THE RED LENS OF THE TYPE II R.P.M. SHALL FACE THE INCORRECT TRAFFIC MOVEMENT.

TYPE II RED/CLEAR OR YELLOW/YELLOW



PRISMATIC REFLECTOR

NOTE:
DIMENSIONS SHOWN FOR RAISED PAVEMENT MARKERS ARE TYPICAL. THE CONTRACTOR MAY SUBSTITUTE SIMILAR MARKERS WITH THE APPROVAL OF THE ENGINEER. REQUESTING APPROVAL FOR SIMILAR MARKERS MAY BE MADE BY REFERRING TO THE AHTD QUALIFIED PRODUCTS LIST.



DETAIL OF STANDARD RAISED PAVEMENT MARKERS



DATE	REVISION	FILMED
6-1-17	ADDED YIELD LINE DETAIL	
5-12-16	REVISED LINE WIDTHS, SPACING, & NOTES	
9-12-13	REVISED DETAIL OF STANDARD RAISED PAVEMENT MARKERS	
11-17-10	REVISED GENERAL NOTES & REMOVED PLOWABLE PVMT MRKRS	
11-18-04	REVISED NOTE 2 & GENERAL NOTES	
8-22-02	ADDED CROSSWALK & STOPBAR DTLS.	
7-02-98	ADDED DETAILS OF STD. RAISED PAVT. MARKERS	
4-26-96	REV. NOTES 3&4; ADDED R.P.M.	
9-30-80	DRAWN	1-9-30-80

ARKANSAS STATE HIGHWAY COMMISSION


PAVEMENT MARKING DETAILS

STANDARD DRAWING PM-1


NOTE:
 1. UNLESS OTHERWISE SPECIFIED ON THE PLANS, THE UNDERDRAIN COVER SHALL BE THOROUGHLY COMPACTED EARTH AND SHALL BE SUBSIDIARY TO PIPE UNDERDRAIN.
 2. GRANULAR MATERIAL SHALL BE WRAPPED WITH GEOTEXTILE FABRIC. LAP FABRIC 12" OR THE WIDTH OF THE TRENCH AT THE TOP.




PLAN VIEW




SIDE VIEW



DETAIL OF HOLE FOR 4" PIPE



FRONT VIEW (DETAIL OF RODENT SCREEN)



DETAILS OF PIPE UNDERDRAIN


NOTES FOR PIPE UNDERDRAINS

1. GEOTEXTILE FABRIC SHALL MEET THE REQUIREMENTS OF SECTION 625 FOR TYPE I. PAYMENT FOR GEOTEXTILE FABRIC AND GRANULAR FILTER MATERIAL SHALL BE INCLUDED IN THE PRICE BID PER LIN. FT. FOR "4" PIPE UNDERDRAINS" IN ACCORDANCE WITH SECTION 611 OF THE STANDARD SPECIFICATIONS.
2. 4" NON-PERFORATED SCHEDULE 40 PVC PIPE LATERALS WITH OUTLET PROTECTORS SHALL BE INSTALLED AS SHOWN HEREON. LATERALS WILL BE MEASURED AND PAID FOR AS "4" PIPE UNDERDRAINS." UNDERDRAIN OUTLET PROTECTORS WILL BE MEASURED AND PAID FOR BY THE UNIT IN ACCORDANCE WITH SECTION 611 OF THE STANDARD SPECIFICATIONS.
3. EXISTING 4" PIPE UNDERDRAINS MAY BE CONNECTED TO PROPOSED DROP INLETS OR EXTENDED WHERE DIRECTED BY THE ENGINEER. PAYMENT FOR CONNECTING TO DROP INLETS SHALL BE CONSIDERED INCLUDED IN THE PRICE BID FOR "4" PIPE UNDERDRAINS."
4. THE LOCATION OF ALL LATERALS SHALL BE MARKED WITH 4" X 12" PERMANENT PAVEMENT MARKING TAPE (TYPE III WHITE) AT THE OUTSIDE EDGE OF THE SHOULDER, PLACED TRANSVERSE TO TRAFFIC. PAYMENT FOR THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR THE VARIOUS CONTRACT ITEMS.
5. PAYMENT FOR THE RODENT SCREEN SHALL BE INCLUDED IN THE PRICE BID PER EACH FOR "UNDERDRAIN OUTLET PROTECTORS."
6. ANY EXISTING UNDERDRAINS THAT INTERFERE WITH INSTALLATION OF THE NEW UNDERDRAIN SYSTEM SHALL BE REMOVED AND DISPOSED OF AS DIRECTED BY THE ENGINEER. PAYMENT WILL BE CONSIDERED INCLUDED IN THE PRICE BID FOR THE VARIOUS CONTRACT ITEMS. EXISTING UNDERDRAIN OUTLET PROTECTORS SHALL BE REMOVED UNDER THE ITEM "REMOVAL AND DISPOSAL OF UNDERDRAIN OUTLET PROTECTORS."
7. AT LOCATIONS WHERE A SINGLE LATERAL IS USED THE CONTRACTOR SHALL HAVE THE FOLLOWING OPTIONS: 1. INSTALL OUTLET PROTECTOR AS SHOWN ON STANDARD DRAWING PU-1 AND GROUT THE UNUSED HOLE OR 2. INSTALL AN OUTLET PROTECTOR WITH A SINGLE HOLE.

FERNCO 1056-44 (4" CI/PLASTIC) OR FERNCO 1051-44 (4" AC/DI OR 4" CI/PLASTIC) COUPLING OR EQUAL WITH 2 CLAMPS (TYPICAL)

UNDERDRAIN OUTLET PROTECTORS

FERNCO 1056-44 (4" CI/PLASTIC) OR FERNCO 1051-44 (4" AC/DI OR 4" CI/PLASTIC) COUPLING OR EQUAL WITH 2 CLAMPS (TYPICAL)



NOTE:
 LATERALS SHALL BE INSTALLED AT ALL SAGS AND AT 250' INTERVALS ON GRADES. THE 250' DISTANCE MAY BE EXCEEDED ONLY WHERE NECESSARY FOR AN ACCEPTABLE OUTLET.

DETAIL OF PIPE UNDERDRAIN LATERALS WHEN PLACED ALONG PAVEMENT EDGE

NOTE: PVC PIPE FOR LATERALS SHALL MEET THE REQUIREMENTS OF ASTM D 1785 (LATEST REVISION) FOR SCHEDULE 40 PIPE.

12-8-16	ADDED NOTES FOR PIPE UNDERDRAINS, REVISED RODENT SCREEN DETAIL AND NOTES, REMOVED NOTE 1 FOR GRANULAR MATERIAL, ADDED NOTE FOR GEOTEXTILE FABRIC	
4-10-03	REVISED NOTE 3	
1-12-00	REVISED DETAIL OF UNDERDRAIN LATERALS	
11-18-98	REVISED NOTE	
10-18-96	REVISED MIN. DEPTH & GEOTEXTILE FABRIC	
4-26-96	ADDED LATERAL NOTE: 5 1/2" TO 5"	
11-22-95	REVISED LATERALS	
7-20-95	REVISED LATERALS & ADDED NOTE	
11-3-94	REVISED FOR DUAL LATERALS	11-3-94
10-1-92	SUBSTITUTED GEOTEXTILE	10-1-92
8-15-91	ADDED POLYETHYLENE PIPE	8-15-91
11-8-90	DELETED ALTERNATE NOTE	11-8-90
1-25-90	ADDED 4" SNAP ADAPTER	1-25-90
11-30-89	DEL. (SUBGRADE); ADDED (WHERE REQUIRED)	11-30-89
7-15-88	ISSUED P.L.M.	647-7-15-88
DATE	REVISION	DATE FILMED

ARKANSAS STATE HIGHWAY COMMISSION


DETAILS OF PIPE UNDERDRAIN

STANDARD DRAWING PU-1

STEEL FABRICATION: REINFORCING STEEL FABRICATION SHALL CONFORM TO THE DIMENSIONS LISTED IN THE TABLE BELOW:

BAR SIZE	PIN DIAMETER	HOOK EXTENSION "K"
3	2 1/4"	4"
4	3"	4 1/2"
5	3 3/4"	5"
6	4 1/2"	6"
7	5 1/4"	7"
8	6"	8"

IF THE OVERALL HEIGHT OF THE HOOK (SEE DIAGRAM BELOW) FOR A "b", "b1", "b2" or "b3" BENT BAR IS GREATER THAN THE CORRESPONDING TOP OR BOTTOM SLAB THICKNESS, LESS 2 3/4 INCHES, EACH BENT BAR SHALL BE REPLACED WITH ONE HOOKED BAR AND ONE STRAIGHT BAR, USING LENGTHS AS SHOWN IN THE TABLE BELOW. THE TWO BARS SHALL BE THE SAME DIAMETER AS, AND PLACED AT THE SAME SPACING AS, THE "b", "b1", "b2" OR "b3" BENT BARS THEY REPLACE.



NOTE: DIMENSIONS OF BARS ARE MEASURED OUT TO OUT OF BARS.

OVERALL HEIGHT OF HOOKED BAR DIAGRAM


THE HOOKED BARS SHALL BE PLACED IN THE BOTTOM OF THE TOP SLAB AND THE TOP OF THE BOTTOM SLAB. THE STRAIGHT BARS SHALL BE PLACED IN THE TOP OF THE TOP SLAB AND THE BOTTOM OF THE BOTTOM SLAB. SEE TABLE BELOW FOR LENGTHS OF REPLACEMENT HOOKED AND STRAIGHT BARS.

FOR SKEWED CULVERTS, THE REPLACEMENT STRAIGHT BAR MAY HAVE TO BE CUT IN FIELD TO FIT.

REPLACEMENT BAR LENGTHS TABLE

BAR SIZE: "b", "b1", "b2" OR "b3"	LENGTH OF HOOKED BAR	LENGTH OF STRAIGHT BAR
#4	L + 1' - 0"	SEE "c" BAR LENGTH
#5	L + 1' - 2"	SEE "c" BAR LENGTH
#6	L + 1' - 4"	SEE "c" BAR LENGTH
#7	L + 1' - 8"	SEE "c" BAR LENGTH
#8	L + 1' - 10"	SEE "c" BAR LENGTH
#9	L + 2' - 6"	SEE "c" BAR LENGTH

L = "OW" - 3 INCHES



WINGWALL & CULVERT DRAINAGE DETAIL

REINFORCED CONCRETE BOX CULVERT GENERAL NOTES

CONCRETE SHALL BE CLASS S WITH A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 3500 PSI. REINFORCING STEEL SHALL BE AASHTO M 31 OR M 53, GRADE 60.

CONSTRUCTION AND MATERIALS FOR WINGWALL & CULVERT DRAINAGE, INCLUDING WEEP HOLES AND GRANULAR MATERIAL, SHALL BE SUBSIDIARY TO THE BID ITEM, "CLASS S CONCRETE".

MEMBRANE WATERPROOFING SHALL CONFORM TO THE REQUIREMENTS OF SECTION 815 OF THE STANDARD SPECIFICATIONS.


MEMBRANE WATERPROOFING SHALL BE APPLIED TO ALL CONSTRUCTION JOINTS IN THE TOP SLAB AND THE SIDEWALLS OF R.C. BOX CULVERTS AS DIRECTED BY THE ENGINEER. NO PAYMENT SHALL BE MADE FOR THIS ITEM, BUT PAYMENT WILL BE CONSIDERED TO BE INCLUDED IN THE VARIOUS ITEMS BID FOR THE R.C. BOX CULVERT.

REINFORCING STEEL TOLERANCES: THE TOLERANCES FOR REINFORCING STEEL SHALL MEET THOSE LISTED IN "MANUAL OF STANDARD PRACTICE" PUBLISHED BY CONCRETE REINFORCING STEEL INSTITUTE (CRSI) EXCEPT THAT THE TOLERANCE FOR TRUSS BARS SUCH AS FIGURE 3 ON PAGE 7-4 OF THE CRSI MANUAL SHALL BE MINUS ZERO TO PLUS 1/2 INCH.

WEEP HOLES IN BOX CULVERT WALLS SHALL HAVE A MAXIMUM HORIZONTAL SPACING OF 10'-0" AND SHALL BE SPACED TO CLEAR ALL REINFORCING STEEL. THE DRAIN OPENING SHALL BE 4" DIAMETER AND SHALL BE PLACED 12" ABOVE THE TOP OF THE BOTTOM SLAB.

WEEP HOLES IN WINGWALLS SHALL HAVE A MAXIMUM HORIZONTAL SPACING OF 10'-0" AND SHALL BE SPACED TO CLEAR ALL REINFORCING STEEL. THERE SHALL BE A MINIMUM OF TWO (2) WEEP HOLES IN EACH WINGWALL. THE DRAIN OPENING SHALL BE 4" DIAMETER AND SHALL BE PLACED 12" ABOVE THE TOP OF THE WINGWALL FOOTING.

THE REQUIREMENTS SHOWN ON THIS DRAWING SHALL SUPERCEDE THE CORRESPONDING REQUIREMENTS ON ALL REINFORCED CONCRETE BOX CULVERT STANDARD DRAWINGS.



NOTE: FOR ALL SKEWED R.C. BOX CULVERTS THE LENGTH "K" OF THE MODIFIED HEADWALL SHALL BE EQUAL TO THE ROADWAY LENGTH "RL". THE ENDS OF THE HEADWALL SHALL BE CONSTRUCTED PARALLEL TO THE SKEW ANGLE OF THE BOX CULVERT.



R.C. BOX CULVERT HEADWALL MODIFICATIONS

DATE	REVISION	DATE FILMED
7/26/12	REV. DRAINAGE FILL MATERIAL & DETAIL	
12/15/11	REQUIRE WEEP HOLES IN BOX CULVERT WALLS	
5-25-06	REV. GEN. NOTES AND DETAILS FOR WEEP HOLES; BAR DIAGRAM	
11-16-01	ADDED WINGWALL DRAINAGE DETAIL/EDITED GEN. NOTES	
10-18-96	REV. ASTM REF. TO AASHTO & ADDED BAR DIAGRAM	
10-12-95	MOVED SOLID SODDING DETAIL TO RCB-2	
6-2-94	ADDED SOLID SODDING PLAN DETAIL	
8-5-93	REVISED PIN DIAMETER TO SPECS.	
8-15-91	DRAWN AND ISSUED	

ARKANSAS STATE HIGHWAY COMMISSION



REINFORCED CONCRETE BOX CULVERT DETAILS

STANDARD DRAWING RCB-1




SOLID SODDING
PLAN
 PARTIAL SECTION SHOWING SOLID SODDING AT HEADWALLS AND WING WALLS


NOTE: LENGTH MEASURED ALONG THE CENTER OF 2' STRIP OF SOLID SODDING.



LONGITUDINAL SECTION
BACKFILL DETAILS FOR BOX CULVERT




SECTION A-A
DETAILS THROUGH EXISTING CHANNELS



SECTION B-B
DETAILS FOR NEW CHANNELS

UNDERCUT SHALL BE MEASURED AND PAID FOR ACCORDING TO SECTIONS 801.10 AND 801.11, RESPECTIVELY, OF THE STANDARD SPECIFICATIONS.



SECTION C-C

GENERAL NOTES:

ROADWAY EXCAVATION (CHANNEL CHANGE) WILL BE PAID FOR AT R.C. BOX CULVERT LOCATIONS. IT WILL BE PAID TO THE LIMITS ACTUALLY CUT AND WILL BE CONFINED TO THAT PORTION OF THE INDICATED AREA THAT IS ABOVE THE FLOW LINE. ROADWAY EXCAVATION (CHANNEL CHANGE) SHALL BE MEASURED BY CROSS SECTIONS AND VOLUMES COMPUTED BY AVERAGE END AREA METHOD. ALL CHANNEL CHANGES SHALL BE BROUGHT TO GRADE PRIOR TO MAKING ANY EXCAVATION FOR STRUCTURES.

EXCAVATION FOR STRUCTURES WILL BE PAID FOR AT ALL R.C. BOX CULVERT LOCATIONS. IT WILL BE PAID TO THE LIMITS SHOWN AND SHALL BE CONFINED TO THAT PORTION OF THE INDICATED AREA THAT IS BELOW THE CHANNEL FLOW LINE.

ROADWAY EXCAVATION SHOWN IN SECTION C-C ABOVE AS SUBSIDIARY WILL NOT BE MEASURED OR PAID FOR DIRECTLY, BUT PAYMENT WILL BE CONSIDERED TO BE INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION.

DATE	REVISION	FILMED
11-20-03	REVISED SECTION A-A NOTE	
8-22-02	REVISED SECTION B-B NOTE	
10-12-95	COMBINED 1891B AND 1888A	
1-4-83	REVISED GENERAL NOTES AND ADDED MAXIMUM PAY LIMIT NOTES.	674-1-4-83
2-2-76	EXCAV. PAY LIMITS	917-2-2-76
10-2-72	REVISED AND REDRAWN	564-10-16-72


ARKANSAS STATE HIGHWAY COMMISSION

EXCAVATION PAY LIMITS, BACKFILL, & SOLID SODDING FOR BOX CULVERTS

STANDARD DRAWING RCB-2

SUPERELEVATION TABLE FOR TWO - WAY TRAFFIC

DEGREE OF CURVE	30 MPH		40 MPH		50 MPH		55 MPH		60 MPH		70 MPH	
	Ls (FT)		Ls (FT)		Ls (FT)		Ls (FT)		Ls (FT)		Ls (FT)	
	MINIMUM	DESIRABLE	MINIMUM	DESIRABLE	MINIMUM	DESIRABLE	MINIMUM	DESIRABLE	MINIMUM	DESIRABLE	MINIMUM	DESIRABLE
0° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
0° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
0° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
1° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
1° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
1° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
1° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
2° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
2° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
2° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
2° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
3° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
3° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
3° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
3° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
4° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
4° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
4° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
4° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
5° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
5° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
5° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
5° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
6° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
6° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
6° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
6° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
7° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
7° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
7° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
7° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
8° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
8° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
8° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
8° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
9° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
9° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
9° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
9° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
10° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
10° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
10° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
10° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
11° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
11° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
11° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
11° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
12° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
12° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
12° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
12° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
13° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
13° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
13° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
13° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
14° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
14° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
14° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
14° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
15° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
15° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
15° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
15° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
16° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
16° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
16° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
16° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
17° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
17° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
17° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
17° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
18° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
18° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
18° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
18° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
19° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
19° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
19° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
19° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
20° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
20° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
20° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
20° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
21° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
21° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
21° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
21° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
22° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
22° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
22° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
22° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
23° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
23° 15'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
23° 30'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
23° 45'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	
24° 00'	N.C.		N.C.		N.C.		N.C.		N.C.		N.C.	



STANDARD METHOD WHEN SUPERELEVATION REVOLVES AROUND INNER SUBGRADE POINT OR INNER PAVEMENT EDGE

NOTE: MAINTAIN NORMAL CROWN ON INSIDE UNTIL SUPERELEVATION EXCEEDS 2%.


ABBREVIATIONS

- NC - NORMAL CROWN
- RC - REVERSE CROWN, SUPERELEVATION AT NORMAL CROWN SLOPE
- e - RATE OF SUPERELEVATION (FT. PER FT.)
- Ls - LENGTH OF SUPERELEVATION TRANSITION (FT.)
- L - DISTANCE FROM BEGINNING OF SUPERELEVATION TRANSITION TO ANY POINT (FT.)
- d - WIDTH OF PAVEMENT (FT.) OR WIDTH OF SUBGRADE (FT.)
- C - NORMAL CROWN (FT.)

GENERAL NOTES

1. ON PAVEMENT WITH TWO-WAY TRAFFIC, THE SUPERELEVATION SHALL BE REVOLVED ON THE INSIDE PAVEMENT EDGE UNLESS OTHERWISE NOTED ON THE PLANS
2. SUPERELEVATION VALUES SHOWN ON THE CROSS SECTIONS ARE VALUES (+) OR (-) TO BE ADDED TO OR SUBTRACTED FROM THE POINT OF CONTROL.
3. LENGTHS FOR L MAY BE ROUNDED IN MULTIPLES OF 25 FT. OR 50 FT. TO PERMIT SIMPLER CALCULATIONS.
4. PAVEMENTS WIDER THAN 2 LANES SHALL HAVE ADDITIONAL TRANSITION LENGTHS AS FOLLOWS:
 - 3 LANE UNDIVIDED - - - - +20%
 - 4 LANE UNDIVIDED - - - - +50%
 - 5 LANE UNDIVIDED - - - - +80%
 - 6 LANE UNDIVIDED - - - - +100%

NOTE: MAINTAIN NORMAL CROWN ON INSIDE UNTIL SUPERELEVATION EXCEEDS 2%. RATE OF SUPERELEVATION SHALL BE COMPUTED ON STRAIGHT LINE METHOD USING APPLICABLE Ls.

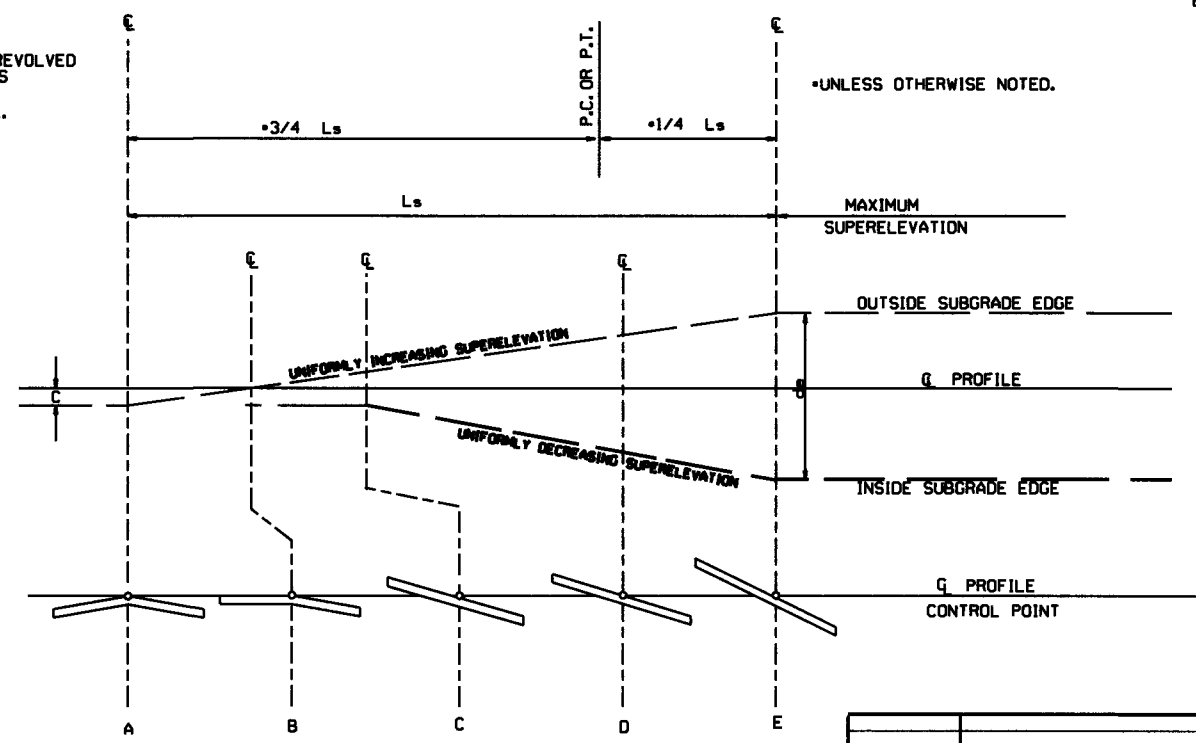














































STANDARD METHOD WHEN SUPERELEVATION REVOLVES AROUND CENTER LINE

SUPERELEVATION FORMULA = $\frac{Lde}{Ls}$





10-18-96	ADDED FORMULA	
01-09-87	ISSUED	534-1-9-87
DATE	REVISION	DATE FILLED

ARKANSAS STATE HIGHWAY COMMISSION
TABLES AND METHOD OF SUPERELEVATION FOR TWO-WAY TRAFFIC
STANDARD DRAWING SE-2




							ADVANCE DISTANCES (XXXX)	
<p>RI-1</p>  <p>STANDARD 30"x30" EXPRESSWAY 36"x36" SPECIAL 48"x48"</p>	<p>RI-2</p>  <p>STD. 36"x36"x36" EXPWY. 48"x48"x48" FWY. 60"x60"x60"</p>	<p>R2-1</p>  <p>STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"</p>	<p>W3-5</p>  <p>STD. 36"x36" EXPWY. 48"x48" FWY. 48"x48"</p>	<p>W3-5a</p>  <p>STD. 36"x36" EXPWY. 48"x48" FWY. 48"x48"</p>	<p>R4-1</p>  <p>STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"</p>	<p>R4-2</p>  <p>STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"</p>	<p>500 FT 1/2 MILE 1000 FT 3/4 MILE 1500 FT 1 MILE AHEAD</p>	
<p>R5-1</p>  <p>STD. 30"x30" EXPWY. 36"x36" SPECIAL 48"x48"</p>	<p>R11-2</p>  <p>48"x30"</p>	<p>R11-3A</p>  <p>60"x30"</p>	<p>R11-4</p>  <p>60"x30"</p>	<p>W21-5a</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>W1-1</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>W1-2</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>GENERAL NOTES:</p> <ol style="list-style-type: none"> ALL TRAFFIC CONTROL DEVICES USED ON ROAD CONSTRUCTION SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION, AND TO THE STANDARD HIGHWAY SIGNS, LATEST EDITION, OR AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION. TRAFFIC CONTROL DEVICES SHALL BE SET UP JUST BEFORE THE START OF CONSTRUCTION OPERATIONS AND SHALL BE PROPERLY MAINTAINED DURING THE TIME SUCH CONDITIONS EXIST. THEY SHALL REMAIN IN PLACE ONLY AS LONG AS NEEDED AND REMOVED THEREAFTER. EXISTING SIGNS AND CONSTRUCTION SIGNS SHALL BE KEPT IN PROPER POSITION, AND BE CLEAN AND LEGIBLE AT ALL TIMES. SIGNS THAT DO NOT APPLY TO EXISTING CONDITIONS SHALL BE REMOVED. SIGNS THAT ARE DAMAGED, DEFACED, OR THAT ACCUMULATE DIRT DURING CONSTRUCTION SHALL BE CLEANED, REPAIRED, OR REPLACED. SIGNS ARE USUALLY MOUNTED ON A SINGLE POST, ALTHOUGH THOSE WIDER THAN 36" OR LARGER THAN 10 SO. FT. SHALL BE MOUNTED ON TWO POSTS OR ABOVE A TYPE III BARRICADE. SIGN POSTS DIRECT BURIED IN SOIL SHALL BE 2 LB. MINIMUM CHANNEL POST OR 4"x4" WOOD POSTS. CHANNEL POSTS SHALL BE PAINTED GREEN. WOOD POSTS SHALL BE PAINTED WHITE. ALL POSTS SHALL BE NEATLY CONSTRUCTED, AND SHALL BE REPLUMBED, CLEANED, OR REPAIRED AS NEEDED FOR THE DURATION OF THE JOB. THERE SHALL NOT BE MORE THAN 2 POSTS IN A 7' PATH FOR WOOD OR CHANNEL POSTS. ANY CHANNEL POST SPLICE SHALL BE IN ACCORDANCE WITH STANDARD DRAWING TC-3. POST MOUNTED SIGNS IN RURAL AREAS SHALL BE CONSTRUCTED WITH THE NEAR EDGE OF THE SIGN FROM 6 TO 12 FEET FROM THE PAVEMENT EDGE. SIGNS IN URBAN AREAS AND BARRICADE MOUNTED SIGNS SHALL BE MOUNTED A MINIMUM OF 2 FEET FROM THE PAVEMENT EDGE. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN URBAN AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN RURAL AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE, EXCEPT A MINIMUM OF 6' SHALL BE USED WHEN MOUNTING AN ADVISORY SIGN BELOW A WARNING SIGN. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR INTERMEDIATE TERM STATIONARY WORK CONDITIONS. THE SIGNS MINIMUM MOUNTING HEIGHT SHALL BE 5'. RETROREFLECTIVE DEVICES SHALL BE USED. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR SHORT-TERM, SHORT DURATION, AND MOBILE CONDITIONS. THEY SHALL BE NO LESS THAN ONE (1) FOOT ABOVE THE TRAVELED WAY. LONG-TERM STATIONARY SIGNS SHALL BE DIRECT BURIED IN SOIL, UNLESS CONDITIONS NECESSITATE THE USE OF PORTABLE SIGNS, OR AS APPROVED BY THE ENGINEER. CONCRETE PADS, CONCRETE OR ROCK BALLAST, OR OTHER SOLID MATERIALS SHALL NOT BE UTILIZED WITH PORTABLE SIGN SUPPORTS. FLAGGERS SHALL USE REFLECTORIZED STOP-SLOW PADDLES. FLAGS MAY BE USED ONLY FOR EMERGENCY SITUATIONS. MOST OF THE SIGNS SHOWN ARE ORIENTED TO THE RIGHT. HOWEVER, THIS DOES NOT PRECLUDE THE USE OF MIRROR IMAGES OF THESE SIGNS WHERE THE REVERSE ORIENTATION MIGHT BETTER CONVEY TO MOTORISTS THE PROPER DIRECTION OF MOVEMENT. R55-1 SIGNS SHALL BE PLACED AT LEAST 1500' BUT NOT MORE THAN 1 MILE IN ADVANCE OF THE WORK ZONE. IF A SPEED LIMIT REDUCTION IS IN EFFECT, THE SIGN SHALL BE PLACED A MINIMUM OF 500' IN ADVANCE OF THE "REDUCED SPEED AHEAD" SIGN. <p>* NOTE: SUPPORTS FOR SIGNS, BARRICADES, AND VERTICAL PANELS THAT ARE DIFFERENT FROM THE REQUIREMENTS SHOWN IN NOTES 4 & 5, BUT MEET THE REQUIREMENTS OF NCHRP-350 OR MANUAL FOR ASSESSING SAFETY HARDWARE (MASH), WILL BE ACCEPTED. COMPLIANCE WITH THE REQUIREMENTS OF NCHRP-350 OR MANUAL FOR ASSESSING SAFETY HARDWARE (MASH) IS REQUIRED FOR ALL PROJECTS.</p>	
<p>W1-3</p>  <p>STD. 48"x48"</p>	<p>W1-4</p>  <p>STD. 48"x48"</p>	<p>W1-6</p>  <p>STD. 48"x24" SPECIAL 60"x30"</p>	<p>W1-8</p>  <p>STD. 18"x24" SPECIAL 24"x30" EXPWY. 30"x36" FWY. 36"x48"</p>	<p>W3-1</p>  <p>STD. 36"x36" SPECIAL 48"x48"</p>	<p>W3-2</p>  <p>STD. 36"x36" SPECIAL 48"x48"</p>	<p>W4-2</p>  <p>STD. 36"x36" FWY. 48"x48"</p>		
<p>W5-1</p>  <p>STD. 36"x36" SPECIAL 48"x48"</p>	<p>W6-3</p>  <p>EXPWY. 36"x36" SPECIAL 48"x48"</p>	<p>W8-7</p>  <p>EXPWY. 36"x36" FWY. 48"x48"</p>	<p>W9-2</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>W13-1</p>  <p>STD. 24"x24"</p>	<p>W20-1</p>  <p>STD. 48"x48"</p>	<p>W20-2</p>  <p>STD. 48"x48"</p>		<p>W20-3</p>  <p>STD. 48"x48"</p>
<p>W20-4</p>  <p>STD. 48"x48"</p>	<p>W20-5</p>  <p>STD. 48"x48"</p>	<p>W20-7a</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>W21-2</p>  <p>STD. 30"x30" SPECIAL 36"x36"</p>	<p>W21-5</p>  <p>STD. 30"x30" SPECIAL 36"x36"</p>	<p>W24-1</p>  <p>STD. 36"x36"</p>	<p>W1-4b</p>  <p>STD. 48"x48"</p>		<p>R56-1</p>  <p>STD. 18"x18"</p>
<p>W8-11</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>W8-9</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>G20-1</p>  <p>60"x24"</p>	<p>G20-2</p>  <p>48"x24"</p>	<p>OM-3L OM-3R</p>  <p>12"x36"</p>	<p>M4-9</p>  <p>STD. 30"x24" SPECIAL 48"x36" SPECIAL 60"x48"</p>	<p>M4-10</p>  <p>48"x18"</p>		<p>R55-1</p>  <p>36"x60"</p> <p>• USE 6" C LETTERS •• USE 4" D LETTERS</p>

4-13-17	DELETED RSP-1 & ADDED W21-5a	
9-2-15	REVISED REDUCED SPEED LIMIT AHEAD SIGNS	
	REVISED ROAD WORK NEXT XX MILES	
12-15-11	REVISED W24-1	
1-17-10	DELETED W8-9a & ADDED W8-9	
10-15-09	ADDED REFERENCE TO MASH & ADDED SIGN W24-1	
4-17-08	REVISED SIGN DESIGNATIONS	
1-18-04	REVISED NOTES	
10-9-03	REVISED NOTE 1	
11-16-01	REVISED NOTE 7	
9-28-00	REVISED NOTE	
1-18-98	ADDED NOTE	
5-26-97	REVISED NOTE 5	
4-03-97	REVISED NOTE 5	
10-18-96	ADDED CONTROLLED ACCESS HWY. SIGN & TO NOTE 7	
10-12-95	ADDED R55-1	
6-8-95	REVISED TO CORRECT SIGN ILLUSTRATIONS	6-8-95
2-2-95	REVISED PER PART VI, MUTCD SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	
DATE	REVISION	FILMED


ARKANSAS STATE HIGHWAY COMMISSION
STANDARD TRAFFIC CONTROLS
FOR HIGHWAY CONSTRUCTION
STANDARD DRAWING TC-1

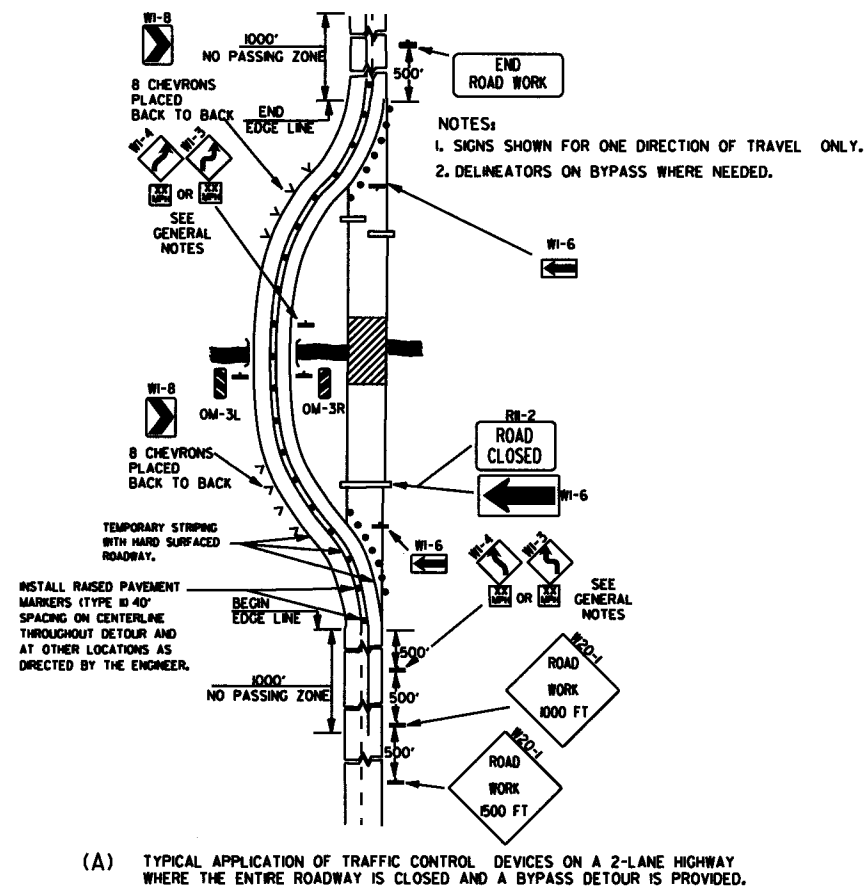


GENERAL NOTES:
1. ADVISORY SPEED POSTED ON W1-3 OR W1-4 CURVE WARNING SIGNS TO BE DETERMINED AT SITE. USE W1-4 WHEN SPEED IS GREATER THAN 30MPH AND W1-3 WHEN 30MPH OR LESS.
2. WHEN THE EXISTING SPEED LIMIT IS 55MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 45MPH, THE R2-K55 SHALL BE OMITTED AND THE W3-5 SHALL BE INSTALLED AT THAT LOCATION. ADDITIONAL R2-145MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1/2 MILE INTERVALS. AT THE END OF THE WORK AREA A R2-KXX SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.
3. WHEN THE EXISTING SPEED LIMIT IS 65MPH AND THE PLANS REQUIRE A SPEED LIMIT OF 55MPH, THE R2-K45 SHALL BE OMITTED. ADDITIONAL R2-155MPH SPEED LIMIT SIGNS SHALL BE INSTALLED AT A MAXIMUM OF 1/2 MILE INTERVALS. AT THE END OF THE WORK AREA A R2-KXX SHALL BE INSTALLED TO MATCH ORIGINAL SPEED LIMIT.
4. THE MAXIMUM SPACING BETWEEN CHANNELIZING DEVICES IN A TAPER SHOULD BE APPROXIMATELY EQUAL IN FEET TO THE SPEED LIMIT. BEYOND THE TAPER, MAXIMUM SPACING SHALL BE TWO TIMES THE SPEED LIMIT, OR AS DIRECTED BY THE ENGINEER.
5. WARNING LIGHTS AND/OR FLAGS MAY BE MOUNTED TO SIGNS OR CHANNELIZING DEVICES AT NIGHT AS NEEDED.
6. PAVEMENT MARKINGS NO LONGER APPLICABLE WHICH MIGHT CREATE CONFUSION IN THE MINDS OF VEHICLE OPERATORS SHALL BE REMOVED OR OBLITERATED AS SOON AS PRACTICABLE.
7. TRAILER MOUNTED DEVICES SUCH AS ARROW PANELS AND PORTABLE CHANGEABLE MESSAGE SIGNS SHALL BE DELINEATED BY AFFIXING CONSPICUOUS MATERIAL IN A CONTINUOUS LINE ON THE FACE OF THE TRAILER, WHEN PLACED ON OR ADJACENT TO THE SHOULDER AND NOT BEHIND A POSITIVE BARRIER, THESE DEVICES SHALL BE DELINEATED BY PLACING FIVE (5) TRAFFIC DRUMS, EQUALLY SPACED ALONG THE TRAFFIC SIDE OF THE DEVICE.
8. DIMENSIONS SHOWN FOR RAISED PAVEMENT MARKERS ARE TYPICAL. THE CONTRACTOR MAY SUBSTITUTE SIMILAR MARKERS WITH THE APPROVAL OF THE ENGINEER. REQUESTING APPROVAL FOR SIMILAR MARKERS MAY BE MADE BY REFERRING TO THE AHTD QUALIFIED PRODUCTS LIST.

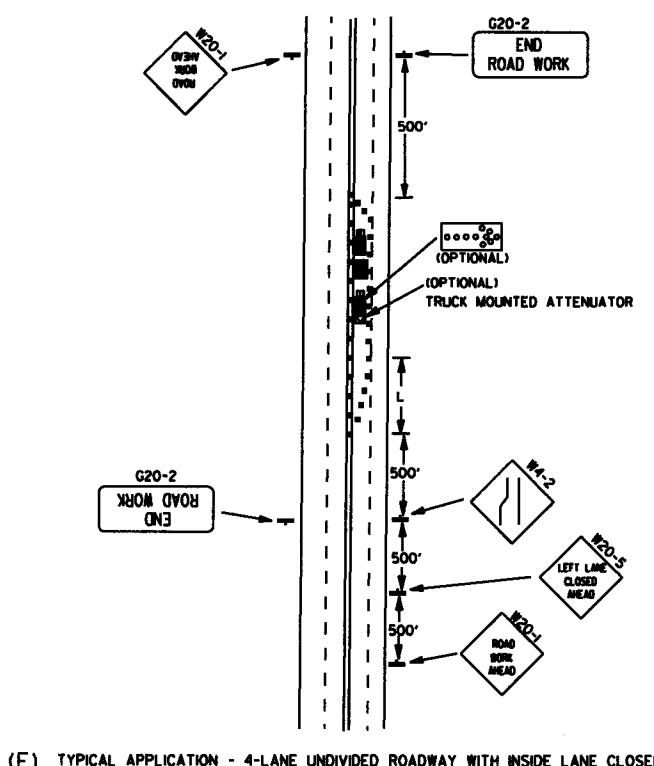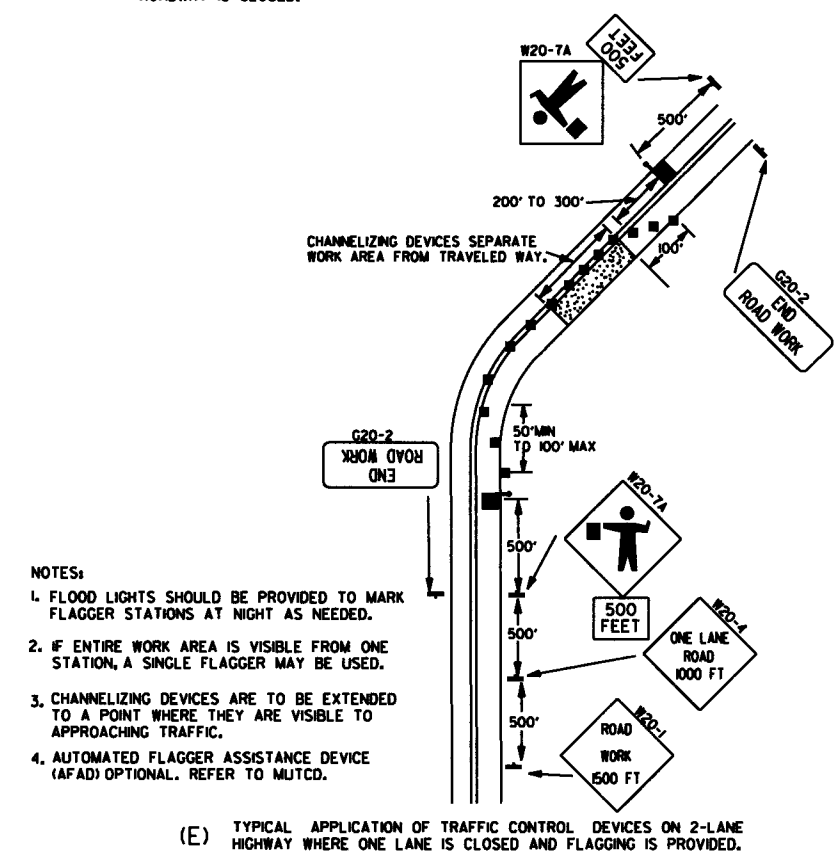

DATE	REVISION	FILED
9-2-85	REVISED NOTE 2, ADDED NOTE B, REVISED DRAWING (A) & REPLACED R2-3A WITH W3-5	
9-12-85	REVISED DETAIL OF RAISED PAVEMENT MARKERS	
3-11-86	ADDED (AFAD)	
8-20-88	REVISED SIGN DESIGNATIONS	
8-18-84	ADDED GENERAL NOTE	
10-18-96	ADDED R55-1	
4-26-96	CORRECTED (C) BEHIND G20-2	
6-8-95	CORRECTED SIGN IDENT. ON W1-4A	6-8-95
2-2-95	REVISED PER PART VI, MUTCD, SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	



(A) Typical application - daytime maintenance operations of short duration on a 4-lane divided roadway where half of the roadway is closed.

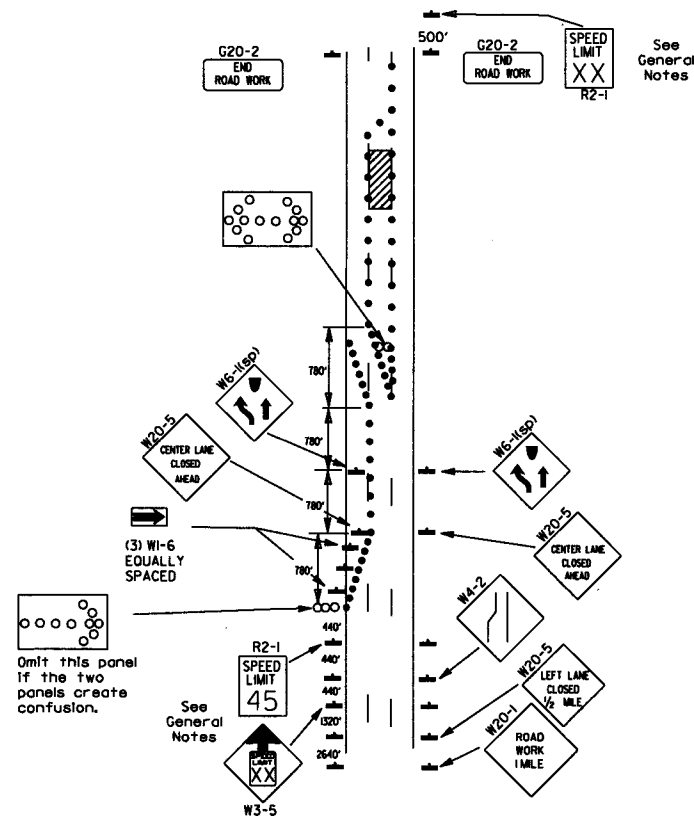


(B) Typical application - 3-lane oneway roadway where center lane is closed.

- KEY:
- Arrow Panel (if Required)
 - Channelizing Device
 - Traffic drum


GENERAL NOTES:

1. A speed limit reduction may be implemented ONLY when designated in the plan or when recommended by the Roadway Design Division.
2. When the existing speed limit is 55mph and the plans require a speed limit of 45mph, the R2-1(55) shall be omitted and the W3-5 shall be installed at that location. Additional R2-1(45) speed limit signs shall be installed at a maximum of 1/2 mile intervals. At the end of the work area a R2-1(XX) shall be installed to match original speed limit.
3. When the existing speed limit is 65mph and the plans require a speed limit of 55mph, the R2-1(65) shall be omitted. Additional R2-1(55) speed limit signs shall be installed at a maximum of 1/2 mile intervals. At the end of the work area a R2-1(XX) shall be installed to match original speed limit.
4. The maximum spacing between channelizing devices in a taper should be approximately equal in feet to the speed limit. Beyond the taper, maximum spacing shall be two times the speed limit or as directed by the Engineer.
5. Warning lights and/or flags may be mounted to signs or channelizing devices at night as needed.
6. Pavement markings no longer applicable which might create confusion in the minds of vehicle operators shall be removed or obliterated as soon as practicable.
7. The G20-1 sign will be required on jobs of over two miles in length. When the lane closure is not at the beginning of the project, the G20-1 sign shall be erected 1/2 mile in advance of the job limit. Additional W20-1(1/2 MILE) signs are not required in advance of lane closures that begin inside the project limits.
8. Flaggers shall use STOP/SLOW paddles for controlling traffic through work zones. Flags may be used only for emergency situations.
9. All plastic drums and cones shall meet the requirements of NCHRP-350 or Manual for Assessing Safety Hardware (MASH).
10. Trailer mounted devices such as arrow panels and portable changeable message signs shall be delineated by affixing conspicuity material in a continuous line on the face of the trailer. When placed on or adjacent to the shoulder and not behind a positive barrier, these devices shall be delineated by placing five (5) traffic drums, equally spaced along the traffic side of the device.

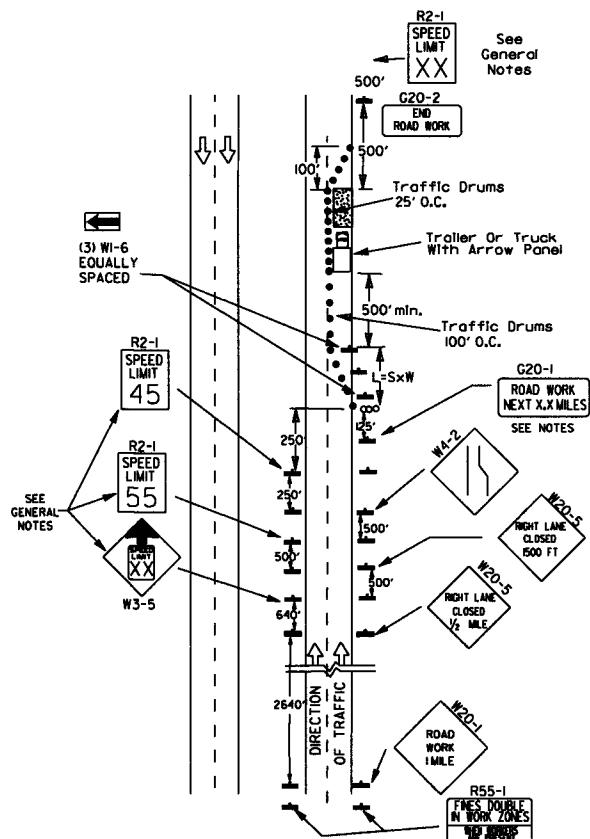


(C) Typical application - construction operations of intermediate to long term duration on a 4-lane divided roadway where half of the roadway is closed.

Channelizing devices

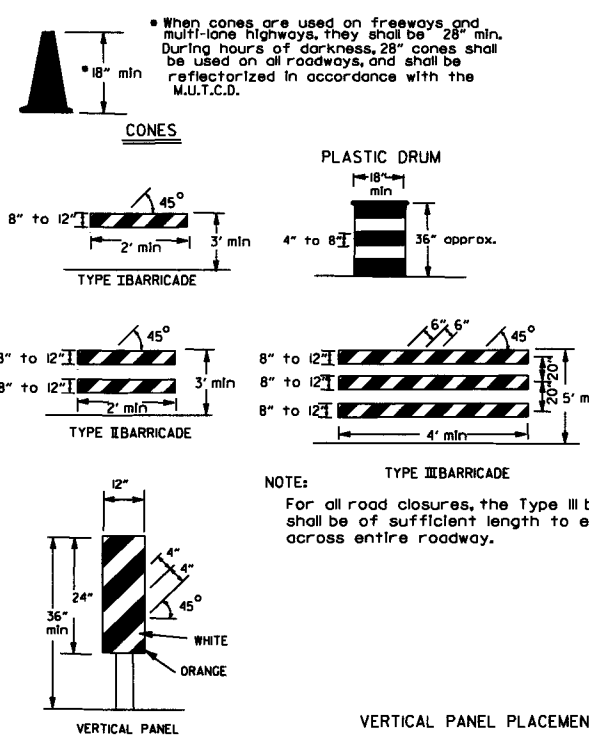

NOTE:
For all road closures, the Type III barricades shall be of sufficient length to extend across entire roadway.


VERTICAL PANEL PLACEMENT




TRAFFIC CONTROL DEVICES FOR VERTICAL PAVEMENT DIFFERENTIALS

VERTICAL DIFFERENTIAL	LOCATIONS	TRAFFIC CONTROL
1" to 3"	Centerline, lane lines	W8-11
1" to 3"	Edge of shoulder	W8-9
Greater than 3"	Lane lines	Standard lane closure required
Greater than 3"	Edge of traveled lane	*RSP-1 and vertical panels, drums or concrete barrier
Greater than 3"	Edge of shoulder	*Vertical panels, drums or concrete barrier


* When shown on the plans concrete barrier will be used.
When the shoulder area is used as part of the traveled lane and there is insufficient width to place drums on the remaining shoulder width, then vertical panels shall be used.




STOP SLOW PADDLE



DETAIL OF SPLICES












NOTES:
USE SPLICES ONLY WHEN NECESSARY FOR INSTALLATION. TYPICAL INSTALLATION SHOULD HAVE NO SPLICES (SEE STD. DRAWING NO. SHS-2)
NORMAL INSTALLATIONS WILL REQUIRE 1/4" DIA. BOLTS TO MOUNT SIGNS TO POST AND 5/16" DIA. BOLTS TO ASSEMBLE THE VARIOUS POST SUPPORTS. EACH OF THESE BOLTS SHALL BE CARRIAGE BOLTS.
SIGN POSTS SHALL BE PAINTED GREEN; SIGNS SHALL NOT BE PAINTED, AND ALL SIGN POSTS SHALL BE PLUMB.

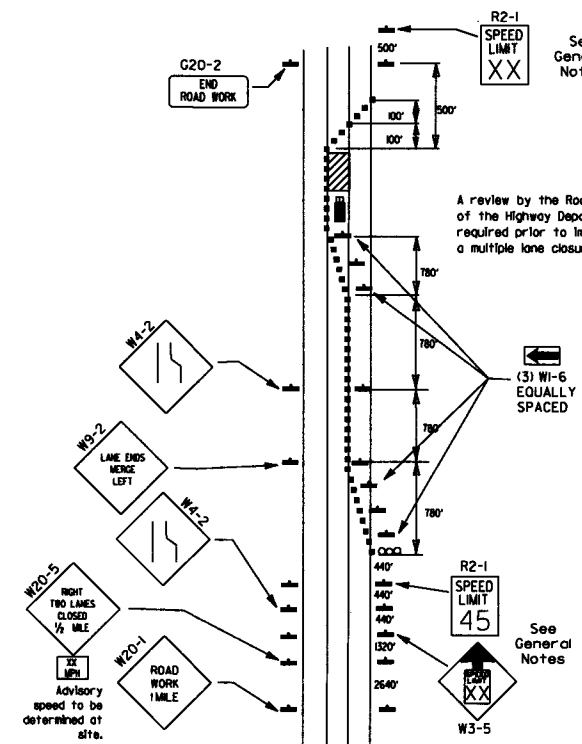

(D) Typical application - closing multiple lanes of a multi-lane highway.



DATE	REVISION	FILED
9-2-85	REVISED NOTE 2 & REPLACED R2-5A WITH W3-5	
10-15-09	ADDED REFERENCE TO MASH	
11-20-08	REVISED SIGN DESIGNATIONS	
8-18-04	ADDED NOTE	
10-1-98	ADDED NOTE	
4-03-97	ADDED (SP) TO W6-1 & REVISED TRAFFIC CONTROL DEVICES NOTE	
10-18-96	ADDED R55-1	
10-12-95	MOVED UPPER SPLICE	
6-8-95	REVISED SPLICE DETAIL, TEXT	6-8-95
2-2-95	REVISED PER PART VI, MUTCD, SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	

ARKANSAS STATE HIGHWAY COMMISSION
STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION
STANDARD DRAWING TC-3



- NOTES:**
1. FILTER SOCKS CAN BE PLACED AT THE TOP, ON THE FACE, AND AT THE TOE OF SLOPES AS SEDIMENT-TRAPPING DEVICES FOR SHEET FLOW RUNOFF.
 2. FILTER SOCKS ARE TYPICALLY SUPPLIED AND INSTALLED WITH 18 INCH DIAMETERS. DIAMETER TOLERANCE IS 2 INCHES, AS FILTER SOCKS TEND TO FLATTEN OUT WHEN PLACED.
 3. STEEL POSTS MAY BE USED AND SHALL BE ROLLED FROM HIGH CARBON STEEL AND HAVE A MINIMUM OF 1.25 LB./FT. POSTS SHALL BE HOT-DIPPED GALVANIZED OR PAINTED WITH HIGH-GRADE WEATHER RESISTANT BROWN OR BLACK STEEL PAINT. STEEL POSTS SHALL BE EQUIPPED WITH ANCHOR PLATE HAVING A MINIMUM AREA OF 14 SQUARE INCHES. POSTS SHALL BE STUDDED, EMBOSSED, OR PUNCHED. POSTS AND ANCHOR PLATES SHALL CONFORM TO THE REQUIREMENTS OF ASTM A702. NO ADDITIONAL PAYMENT WILL BE PROVIDED FOR STEEL POSTS, BUT PRICE WILL BE CONSIDERED SUBSIDIARY TO "FILTER SOCK (18\"/>
 - 4. FILTER SOCKS MAY BE UP TO 250 FEET LONG. WHEN USED ON LONG SLOPES, FILTER SOCKS MAY BE JOINTED OR STAGGERED AS SHOWN IN DETAILS.
 - 5. INSPECT FILTER SOCKS AFTER EACH RUNOFF EVENT. REMOVE AND REPLACE IF SIGNS OF UNDERCUTTING OR DOWNSTREAM FILLS ARE OBSERVED.

FILTER SOCK ALONG SLOPE (E-3)




- NOTES:**
1. OVERLAP ENDS OF SOCK (1\"/>
 - 2. USE 18\"/>


COMPOST FILTER SOCK DROP INLET PROTECTION (E-13)

DATE	REVISION	FILED
11-16-17	ADDED FILTER SOCK E-3 AND E-13	
12-15-18	DELETED BALED STRAW DITCH CHECK & ADDED WATTLE DITCH CHECK	
11-18-98	ADDED NOTES	
07-02-98	ADDED BALED STRAW FILTER BARRIER (E-2)	
07-20-95	REVISED SILTS FENCE E-4 AND E-11	7-20-95
07-15-94	REV. E-4 & E-11 MIN. 15\"/>	
06-02-94	REVISED E-1, 4, 7 & 11 DELETED E-2 & 3	6-2-94
04-01-93	REDRAWN	
10-01-92	REDRAWN	
08-02-76	ISSUED R.O.M.	298-7-28-76


ARKANSAS STATE HIGHWAY COMMISSION
TEMPORARY EROSION CONTROL DEVICES
STANDARD DRAWING TEC-1




NOTE:
SIZE OF BASIN TO BE DETERMINED
BY VOLUME REQUIRED; HOWEVER
A MINIMUM LENGTH-TO-WIDTH
RATIO OF 2:1 SHALL BE USED.




SEDIMENT BASIN WITH RIPRAP OUTLET (E-9)




NOTE:
SIZE OF BASIN TO BE DETERMINED
BY VOLUME REQUIRED; HOWEVER
A MINIMUM LENGTH-TO-WIDTH
RATIO OF 2:1 SHALL BE USED.




SEDIMENT BASIN WITH PIPE OUTLET (E-10)



DIVERSION DITCH (E-8)



SLOPE DRAIN (E-12)



SEDIMENT BASIN (E-14)

6-2-94	Revised E-8 & E-12; Added E-14 & Deleted E-13	
4-1-93	ISSUED	
DATE	REVISION	FILMED


ARKANSAS STATE HIGHWAY COMMISSION
 TEMPORARY EROSION
 CONTROL DEVICES
 STANDARD DRAWING TEC-2

CLEARING AND GRUBBING

CONSTRUCTION SEQUENCE

1. PLACE PERIMETER CONTROLS (I.E. SILT FENCES, DIVERSION DITCHES, SEDIMENT BASINS, ETC.)
2. PERFORM CLEARING AND GRUBBING OPERATION.

EXCAVATION




GENERAL NOTE

ALL CUT SLOPES SHALL BE DRESSED, PREPARED, SEEDED, AND MULCHED AS THE WORK PROGRESSES. SLOPES SHALL BE EXCAVATED AND STABILIZED IN EQUAL INCREMENTS NOT TO EXCEED 25 FEET, MEASURED VERTICALLY.

CONSTRUCTION SEQUENCE

1. EXCAVATE AND STABILIZE INTERCEPTOR AND/OR DIVERSION DITCHES.
2. PERFORM PHASE 1 EXCAVATION. PLACE PERMANENT OR TEMPORARY SEEDING.
3. PERFORM PHASE 2 EXCAVATION. PLACE PERMANENT OR TEMPORARY SEEDING.
4. PERFORM FINAL PHASE OF EXCAVATION. PLACE PERMANENT OR TEMPORARY SEEDING. STABILIZE DITCHES. CONSTRUCT DITCH CHECKS, DIVERSION DITCHES, SEDIMENT BASINS, OR OTHER EROSION CONTROL DEVICES AS REQUIRED.

EMBANKMENT





GENERAL NOTE

ALL EMBANKMENT SLOPES SHALL BE DRESSED, PREPARED, SEEDED, AND MULCHED AS THE WORK PROGRESSES. SLOPES SHALL BE CONSTRUCTED AND STABILIZED IN EQUAL INCREMENTS NOT TO EXCEED 25 FEET, MEASURED VERTICALLY.



CONSTRUCTION SEQUENCE

1. CONSTRUCT DIVERSION DITCHES, DITCH CHECKS, SEDIMENT BASINS, SILT FENCES, OR OTHER EROSION CONTROL DEVICES AS SPECIFIED.
2. PLACE PHASE 1 EMBANKMENT WITH PERMANENT OR TEMPORARY SEEDING. PROVIDE DIVERSION DITCHES AND SLOPE DRAINS IF EMBANKMENT CONSTRUCTION IS TO BE TEMPORARILY ABANDONED FOR A PERIOD OF GREATER THAN 21 DAYS.
3. PLACE PHASE 2 EMBANKMENT WITH PERMANENT OR TEMPORARY SEEDING. PROVIDE DIVERSION DITCHES AND SLOPE DRAINS IF EMBANKMENT CONSTRUCTION IS TO BE TEMPORARILY ABANDONED FOR A PERIOD OF GREATER THAN 21 DAYS.
4. PLACE FINAL PHASE OF EMBANKMENT WITH PERMANENT OR TEMPORARY SEEDING. PLACE DIVERSION DITCHES AND SLOPE DRAINS AND MAINTAIN UNTIL ENTIRE SLOPE IS STABILIZED.

ARKANSAS STATE HIGHWAY COMMISSION		
TEMPORARY EROSION CONTROL DEVICES		
11-03-94	CORRECTED SPELLING	6-2-94
6-2-94	Drawn & Issued	FILMED
DATE	REVISION	
STANDARD DRAWING TEC-3		




TRIANGULAR SILT DIKE INSTALLATION FOR DIVERSION DITCH AND/OR DITCH LINER





TRIANGULAR SILT DIKE INSTALLATION FOR ROADWAY DITCH OR DRAINAGE DITCH


- POINT "1" MUST BE HIGHER THAN POINT "2" TO ENSURE THAT WATER FLOWS OVER THE DIKE AND NOT AROUND THE ENDS.
- ⊗ STAPLES SHALL BE PLACED WHERE THE UNITS OVERLAP AND IN THE CENTER OF THE UNIT AS SHOWN ON THE DIAGRAM.



TRIANGULAR SILT DIKE INSTALLATION FOR CONTINUOUS BARRIER




TRIANGULAR SILT DIKE INSTALLATION FOR DROP INLETS



TRIANGULAR SILT DIKE INSTALLATION FOR TEMPORARY DITCH LINER


GENERAL NOTES

1. THIS WORK SHALL CONSIST OF FURNISHING, INSTALLING, AND MAINTAINING THE TRIANGULAR SILT DIKE. THE DIKES SHALL BE USED AS A CONTINUOUS LINE BARRIER AT THE TOE OF SLOPE OR ACROSS THE ROADWAY DITCH TO CONTAIN SEDIMENT AND MINIMIZE EROSION, OR AS DIRECTED BY THE ENGINEER. THESE DIKES SHALL BE INSTALLED AND LOCATED AS SOON AS CONSTRUCTION WILL ALLOW OR AS DIRECTED BY THE ENGINEER.
2. TRIANGULAR SILT DIKE SHALL BE TRIANGULAR SHAPED HAVING A HEIGHT OF AT LEAST 8" TO 10" IN THE CENTER WITH EQUAL SIDES AND A 16" TO 20" BASE. THE TRIANGULAR SHAPED INNER MATERIAL SHALL BE URETHANE FOAM. THE OUTER COVER SHALL BE A WOVEN GEOTEXTILE FABRIC PLACED AROUND THE INNER MATERIAL & ALLOWED TO EXTEND BEYOND BOTH SIDES OF THE TRIANGLE 24" TO 36". THIS FABRIC SHOULD BE MILDEW RESISTANT, ROT-PROOF AND RESISTANT TO HEAT AND ULTRAVIOLET RADIATION MEETING REQUIREMENTS FOR SEDIMENT CONTROL IN AASHTO M288. THE DIKES SHALL BE ATTACHED TO THE GROUND WITH WIRE STAPLES. THE STAPLES SHALL BE NO. 11 GAUGE WIRE AND BE AT LEAST 6" TO 8" LONG. STAPLES SHALL BE PLACED AS SHOWN ON THESE DETAILS.
- THE CONTRACTOR SHALL INSPECT ALL DIKES AFTER EACH RAINFALL EVENT OF AT LEAST 0.5" OR GREATER. ANY DEFICIENCIES OR DAMAGE SHALL BE REPAIRED BY THE CONTRACTOR. ACCUMULATED SILT OR DEBRIS SHALL BE REMOVED AND RELOCATED AS DIRECTED BY THE ENGINEER. IF THE DIKES ARE DAMAGED OR INADVERTENTLY MOVED DURING THE SILT REMOVAL PROCESS, THE CONTRACTOR SHALL IMMEDIATELY REPLACE AFTER DAMAGE OCCURS.
3. ACCEPTED TRIANGULAR SILT DIKE, MEASURED AS PROVIDED ABOVE, WILL BE PAID FOR AT THE CONTRACT UNIT PRICE BID FOR TRIANGULAR SILT DIKE. PRICE BID WILL INCLUDE THE COST OF FURNISHING THE DIKES, INSTALLING, MAINTAINING AND REMOVAL WHEN DIRECTED BY THE ENGINEER.



NOTE: SILT DIKE SHOULD ONLY BE USED FOR DROP INLETS IN SUMP LOCATIONS.

ARKANSAS STATE HIGHWAY COMMISSION	
TEMPORARY EROSION CONTROL DEVICES	
STANDARD DRAWING TEC-4	
7-26-12	REVISED GENERAL NOTE 2.
12-15-11	ISSUED
DATE	REVISION
	FILMED



CORNER POST (WOOD)
5" MIN. DIA. 7'-3" LENGTH

GATE POST (WOOD)
5" MIN. DIA. 8'-10" LENGTH
12'-16" VEHICULAR
4' PEDESTRIAN
LATCH W/ LOCK
USE SAME APPROACH SPANS AS FOR CORNER POSTS

12'-16" VEHICULAR
4' PEDESTRIAN
GATE POST (STEEL)
2 1/2" OUTSIDE DIA.
OR 2 1/2" x 2 1/2" x 1/4" L
7'-8" LENGTH
BRACE - 1 1/2" O.D.
TUBULAR OR
2" x 2" x 1/4" L
CONCRETE
1 1/2" O.D.
GATE FRAME
DIA.

GENERAL NOTES:

STEEL LINE POSTS SHALL BE PAINTED OR GALVANIZED. TUBULAR END, CORNER, PULL, OR DIAGONAL BRACES MUST CONFORM TO THE DIMENSIONS AND WEIGHTS SPECIFIED ON STANDARD DRAWING WF-3 (CHAIN LINK). APPROVED ALTERNATES ARE ACCEPTABLE. AN ACCEPTABLE TOLERANCE IN LENGTH OF TUBULAR OR WOODEN POSTS SHALL BE +/- 1" TO +/- 2". TUBULAR POSTS MUST BE PAINTED OR GALVANIZED.

THE CONTRACTOR SHALL FURNISH AT LEAST 25% OF TIMBER LINE POSTS OF 7 FOOT LENGTHS IN ORDER TO PROVIDE SUFFICIENT SET IN SOFT GROUND OR SMALL DEPRESSIONS.

DRIVEWAY GATES, EITHER SINGLE 12' TO 16' OR DOUBLE 6' TO 8' OPENING OF THE SAME TYPE AS THE PEDESTRIAN GATE, SHALL BE INSTALLED ON THE RIGHT SIDE OF EACH THROUGH LANE ROAD AT LARGE CULVERTS OR BRIDGE CROSS FENCE, FOR USE OF MAINTENANCE EQUIPMENT. LOCATION OF GATES TO BE SHOWN ON PLANS OR AS DESIGNATED BY THE ENGINEER.


AT STREAM CROSSINGS, THE FENCE SHALL NOT BE CONSTRUCTED ACROSS LARGE STREAMS. WHERE CLEARANCE IS SUFFICIENT FROM THE TOP OF THE BANK TO THE BRIDGE STRUCTURE A CROSS CONNECTION SHALL BE CONSTRUCTED BETWEEN THE FENCE ON EACH SIDE OF THE ROAD. WHERE THE CLEARANCE IS NOT SUFFICIENT, THE FENCE SHALL BE TERMINATED WITH CROSS CONNECTIONS AND END POSTS ADJACENT TO BRIDGE ABUTMENTS OR CULVERT WINGWALLS.

TYPE C FENCE (WOOD POSTS)

LINE POST
3" MIN. DIA. 6'-3" LENGTH
MAX. SPACING TO BE 10'-0"

LINE BRACE ASSEMBLY
MAX. SPACING TO BE 330'

OTHER APPROVED TIES WILL BE PERMITTED




DIAGONAL BRACE
1 1/2" O.D. TUBULAR
OR 2" x 2" x 1/4" L

END, CORNER OR PULL POST
2 1/2" O.D. TUBULAR
OR 2 1/2" x 2 1/2" x 1/4" L (6'-9" LENGTH)

NOTE: STEEL LINE POSTS SHALL BE 6'-6" MINIMUM LENGTH.

TYPE C FENCE (STEEL POSTS)

NOTE: USE 3/4" x 1 1/2" LAG BOLT & SHIELD OR AS APPROVED BY THE ENGINEER.




DETAIL OF FENCE CONSTRUCTION AT LARGE CULVERTS (5' IN HEIGHT AND OVER)

SPLICE FOR BARBED WIRE BETWEEN PULL POST ASSEMBLY SHALL BE BY THE 'EYE METHOD' AS DESCRIBED AS FOLLOWS: THE ENDS OF THE BARBED WIRE SHALL BE BENT TO FORM A LOOP. THE LOOPS SHALL BE CONNECTED. AFTER THE LOOPS ARE CONNECTED THE ENDS OF THE WIRE SHALL BE WRAPPED AROUND THE PROJECTING WIRES A MINIMUM OF 4 TIMES FOR EACH WIRE LOOP.


SPLICE FOR WOVEN WIRE BETWEEN PULL POST SHALL BE BY THE 'WESTERN UNION METHOD' AS DESCRIBED AS FOLLOWS: THE VERTICAL WIRES FOR EACH END OF THE FENCE FABRIC SHALL BE PLACED SIDE BY SIDE AND THE PROJECTING HORIZONTAL WIRES SHALL BE WRAPPED A MINIMUM OF 4 TIMES AROUND THE HORIZONTAL WIRES OF THE FIRST WEB.

STAPLE AT LEAST TOP, BOTTOM AND ALTERNATE WIRES OF WOVEN FABRIC FOR WOOD LINE POSTS.

- 4 STRANDS BARBED WIRE (D)
- 5 STRANDS BARBED WIRE (D-1)
- 6 STRANDS BARBED WIRE (D-2)

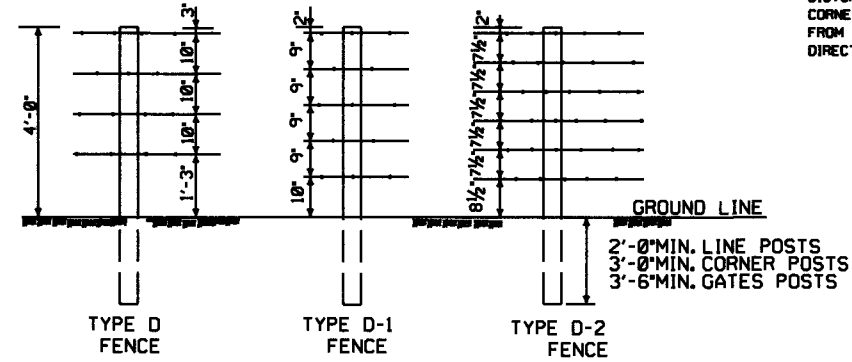


NOTE: SPACING AND SIZE (EXCEPT LENGTH) OF POSTS, APPROACH SPANS, PULL POST ASSEMBLIES, AND CORNER BRACING FOR TYPE D FENCE SHALL CONFORM TO TYPE C FENCE. USE GALVANIZED STAPLES ON WOOD POSTS AND APPROVED FASTENERS ON STEEL POSTS.




NOTE: RIGHT-OF-WAY MONUMENTS SHALL NOT BE DISTURBED BY FENCE CONSTRUCTION. CORNER POSTS SHALL BE CONSTRUCTED 2' FROM THE RIGHT-OF-WAY MONUMENT OR AS DIRECTED BY THE ENGINEER.

RIGHT-OF-WAY FENCE LOCATION



PRIVATE FENCE TERMINAL INSTALLATION
WHERE EXISTING FENCE CONSISTS OF STEEL POSTS, USE END POST ASSEMBLY AS SHOWN IN TYPE C FENCE OR OTHER END POST ASSEMBLY AS APPROVED BY THE ENGINEER.



OTHER STYLE VEHICULAR GATES MAY BE USED WITH THE APPROVAL OF THE ENGINEER. THE METHOD OF SECURING GATE (LATCH AND/OR LOCK) SHALL MEET THE APPROVAL OF THE ENGINEER.

8-22-02	REVISED GENERAL NOTES	
10-18-96	REVISED AASHTO	
11-22-96	REVISED R-O-W LOCATION DETAIL	
6-2-94	REVISED BARB WIRE AND ADDED CORNER POST NOTES	6-2-94
8-5-93	REVISED R/W INSTALLATION FENCE	8-5-93
10-1-92	ADDED STAPLE NOTE	10-1-92
8-15-91	ADDED TYPE D-2 FENCE	8-15-91
11-30-89	DELETED CLASS CONCRETE	11-30-89
7-15-88	ADDED SPLICE NOTE	700-7-15-88
10-30-87	GENERAL REVISIONS	549-10-30-87
11-1-84	MAX. POST SPACING MIN. WIRE GAUGE	507-11-1-84
1-4-83	MIN. DIA. LINE POST	648-1-4-83
3-2-81	TOLERANCE FOR POST LENGTH	722-3-2-81
12-1-72	ADDED D-1 & FENCE INSTALLATION	564-12-1-72
10-2-72	REVISED AND REDRAWN	540-10-2-72
DATE	REVISION	FILMED

ARKANSAS STATE HIGHWAY COMMISSION

**WIRE FENCE
TYPE C AND D**

STANDARD DRAWING WF-4